

LED LIGHTING PRODUCT

*Euri*  
Euri Company

# CATALOG

2025 | SPRING | COMMERCIAL

We strive to save our clients energy while illuminating indoor and outdoor spaces with quality products manufactured and tested against the highest standards. Each product is created with our clients in mind; therefore, we pride ourselves in offering competitive pricing without sacrificing quality and performance.



## COMPANY HISTORY & MISSION

**Euri Company** now encompasses Lighting, Station, and Home brands under the division of **IRTronix**, a leading force in LED solutions. Established in 2000, IRTronix specializes in UV LED components and power semiconductors solutions. Born out of the idea to make energy-efficient lighting products accessible for all, Euri Lighting is leading the charge in technology and innovation. As a manufacturer and supplier of eco-friendly LED lighting products, we strive to continue saving energy while illuminating residential and commercial spaces. Every Euri Lighting LED Lamp is manufactured by the highest standards, tested to ensure quality performance, and guaranteed to last longer and save energy with every use. For LED lighting the future is now, and Euri Lighting is keeping up to speed. All of our LED lights save over 80% more energy than traditional lighting without sacrificing bright light quality. Geared towards our customers, we are proud to offer limited warranties and competitive pricing on all Euri Lighting products.

## OUR GOAL

Euri Lighting strives to give light to consumers and maintain the most eco-friendly and energy efficient alternatives to traditional lighting. We are making a difference one light at a time. We welcome you to view our products and get bright ideas for life.

**“Bright ideas for life”**

## OUR PRODUCT LINES



**ECON**  
Economical  
Products



**EVERYDAY**  
Signature  
Products




**E-LITE**  
Premium  
Products



**3WAY LED LINE**  
Advanced  
Products



**SMART**  
Wi-Fi Enabled  
Products



**LED FILAMENT**  
Vintage  
Products



**LED FLAME**  
Decorative  
Products



**LED FLAME LANTERN**  
Decorative  
Products



**LED FIXTURES**  
Commercial & Residential  
Luminaires

## Commercial LED Lamps

LED PL Lamp	Page 5
LED Linear	Page 6
LED Corn Bulb	Page 8
LED Light Engine - MPLR	Page 9

## Commercial LED Fixtures

LED Downlight	Page 10
LED Troffer	Page 13
LED Flat Panel	Page 14
LED Linear Light	Page 15
LED Architectural Linear Light	Page 16
LED Canopy Light	Page 18
LED UFO High Bay Light	Page 19
LED Linear High Bay Light	Page 20
LED Area Light	Page 21
LED Wall Pack	Page 22
Commercial Product Accessory	Page 23

# Commercial Lighting



Our powerful commercial products are developed to endure long hours of use supporting your business at all times.

Durable and rugged materials used during production ensure constant performance in every use. Euri Lighting is committed to safety and efficiency. Therefore, we work in compliance with institutions like DLC, UL, ETL, Energy Star, among others to ensure the safety and sustainability of our products. Our commercially ranked products are suitable for use in offices, workshops, garages, retail stores and commercial spaces. To learn more, we encourage you to continue exploring what Euri has waiting for you.



# Commercial LED PL Lamp



An energy saving alternative to fluorescent lighting, Euri Lighting's LED PL Series is suitable for a wide variety of commercial applications replacing CFL lamps. Built to last and provide quality bright light, these PL lamps are available in vertical or horizontal direct replacement options. For easy installation, Euri's hybrid PL lamps may be used with or without ballast.

**Hybrid (Type A+B) :** Use with or without a ballast



**Horizontal**  
EPL-2100H  
EPL-2140H  
EPL-2150H




**Vertical**  
EPL-2100Hv  
EPL-2140Hv  
EPL-2150Hv


Damp Rated

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Install Type	Size (Ø x H)	UL	DLC	Qty.		
COMMERCIAL LIGHTING													* Frosted Plastic Lens				
EPL-2100H(3000K), EPL-2140H(4000K), EPL-2150H(5000K)																	
12 W	26 W	AC120-277V	1100 lm	140°	80	91 lm/W	0.9	0.4 A	G24Q (4 Pin)	50,000 Hrs.	Hybrid	1.3" x 5.8"	Yes	No	1		
EPL-2100Hv(3000K), EPL-2140Hv(4000K), EPL-2150Hv(5000K)																	
12 W	26 W	AC120-277V	1100 lm	140°	80	91 lm/W	0.9	0.4 A	G24Q (4 Pin)	50,000 Hrs.	Hybrid	3" x 3.78"	Yes	No	1		


### Retrofit with One Lamp (G24Q Base)

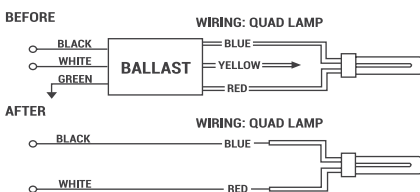

### Retrofit with Two Lamp (G24Q Base)

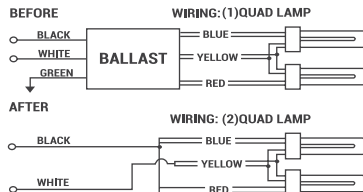

### Direct plug and play with ballast

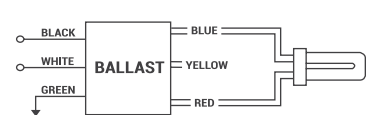

# Commercial LED Tube-Linear



Euri Lighting's most convenient and accommodating collection, the LED Hybrid Tube Series is made available in various shapes, sizes, and methods for installation. Most commonly used in parabolic and indirect light fixtures within commercial spaces, these LED tubes provide better brightness while using less than half the energy fluorescent tubes consume.

## **T5 Class**

### ■ Hybrid (Type A+B)

ET5-24W304H / ET5-24W305H

## **T8 Class**

### ■ Hybrid (Type A+B)

ET8-15W50SH / ET8-18W50SH

### ■ Ballast Bypass (Type B)

ET8-4040T-12 / ET8-4050T-12

ET8-4040T-15 / ET8-4050T-15

## **U-Shaped T8 Class**

### ■ Hybrid (Type A+B)

EUB-15W304H / EUB-15W305H

# Commercial LED Tube-Linear



**T5 Class**  
ET5-24W304H  
ET5-24W305H



**T8 Class**  
ET8-15W50SH  
ET8-18W50SH



**T8 Class**  
ET8-4040T-12  
ET8-4050T-12  
ET8-4040T-15  
ET8-4050T-15



**U-Shaped Class**  
EUB-15W304H  
EUB-15W305H



**Dimming Driver**  
EED-100WD  
\*Dimming From 0-100%

Damp Rated New Item

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Install Type	Material	Size (H x Ø)	UL	DLC	NSF	Dim.	Qty.
<b>ET5 LED Tubes - Hybrid (Type A+B)</b>																		
<b>ET5-24W304H(4000K), ET5-24W305H(5000K)</b>																		
24 W	54 W	AC120-277 V	3200 lm	120°	83	133 lm/W	0.9	0.22 A	G5	50,000 Hrs.	Hybrid	Frosted Glass	45.8" x 0.7"	Yes	Yes	Yes	Yes	25
<b>ET8 LED Tubes - Hybrid (Type A+B)</b>																		
<b>ET8-15W50SH(3500K/4000K/5000K)</b> <span style="background-color: #e0f0e0;">3 CCT Selectable</span>																		
15 W	32 W	AC120-277 V	1850 lm 1900 lm 2000 lm	200°	83	123 lm/W 126 lm/W 133 lm/W	0.9	0.139 A	G13	50,000 Hrs.	Hybrid	Frosted Glass	47.1" x 1"	Yes	Yes	Yes	Yes	20
<b>ET8-18W50SH (3500K/4000K/5000K)</b> <span style="background-color: #e0f0e0;">3 CCT Selectable</span>																		
18 W	32 W	AC120-277 V	2450 lm 2600 lm 2700 lm	200°	83	136 lm/W 144 lm/W 150 lm/W	0.9	0.167 A	G13	50,000 Hrs.	Hybrid	Frosted Glass	47.1" x 1"	Yes	Yes	Yes	Yes	20
<b>ET8 LED Tubes - Ballast Bypass (Type B)</b>																		
<b>ET8-4040T-12(4000K), ET8-4050T-12(5000K)</b>																		
12 W	32 W	AC120-277 V	1900 lm	180°	80	158 lm/W	0.9	0.12 A	G13	50,000 Hrs.	Type B	Frosted Glass	47.7" x 1"	Yes	Yes	Yes	Yes	25
<b>ET8-4040T-15(4000K), ET8-4050T-15(5000K)</b>																		
15 W	32 W	AC120-277 V	2200 lm	180°	80	146 lm/W	0.9	0.15 A	G13	50,000 Hrs.	Type B	Frosted Glass	47.7" x 1"	Yes	Yes	Yes	Yes	25
<b>U-Shaped LED Tubes - Hybrid (Type A+B)</b>																		
<b>EUB-15W304H(4000K), EUB-15W305H(5000K)</b>																		
15 W	32 W	AC120-277 V	1950 lm	160°	83	130 lm/W	0.9	0.139 A	G13	50,000 Hrs.	Hybrid	Frosted Glass	22.4" x 7"	Yes	Yes	Yes	Yes	10

**Hybrid (Type A+B)** : Use with or without a ballast

**Ballast Bypass (Type B)** : Use without a ballast


2700K Warm White

3000K Soft White

4000K Bright White


5000K Cool White

# Commercial LED Corn Bulb

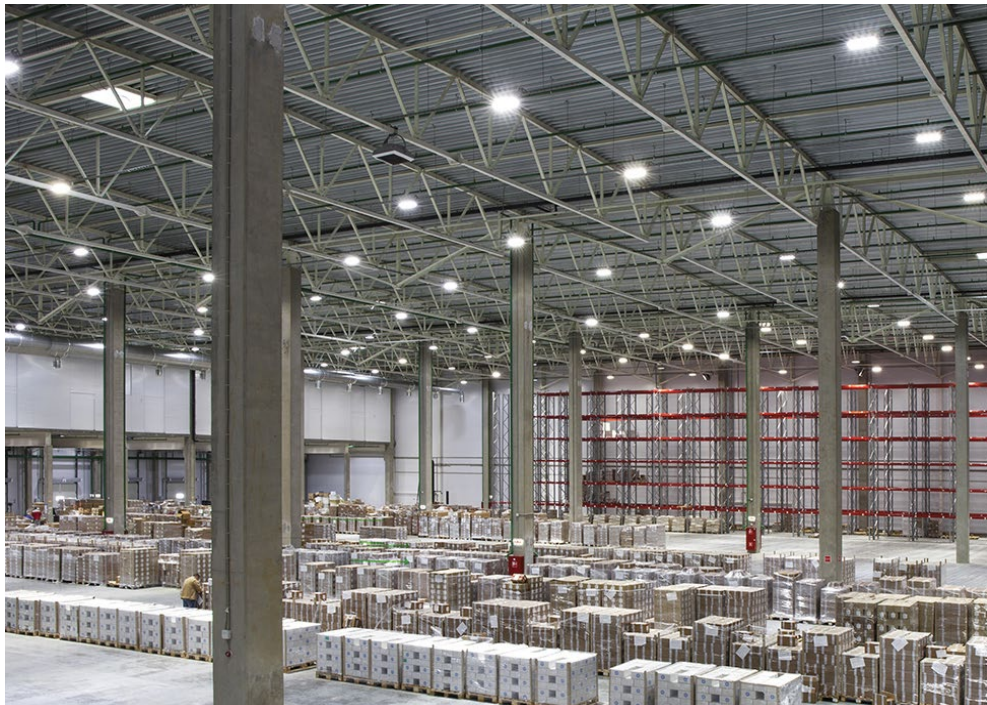

Experience the new generation corn bulbs with 9 in 1 options to suit your desired light requirements. Our corn bulbs come in multiple sizes and can be color and wattage selectable. Select colors between Soft White (3000K), Bright White (4000K), and Cool White (5000K). Select between 3 wattages on a single corn bulb using a knob. Aesthetically designed and enclosed fixture rated, enjoy additional IP64 indoor and outdoor protection. Euri Corn bulbs have a sturdy build and excellent cooling technology for better heat dissipation and extra-long lifetime.

**Ballast Bypass (Type B) : Operates without a ballast**

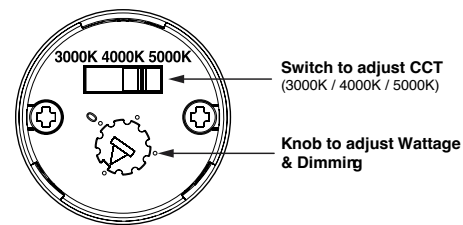

Damp Rated IP64 Protection Fully Enclosed Suitable

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Install Type	Size (Ø x H)	UL	DLC	Qty.
<b>LED Lamps Commercial Products</b>															
* Clear Plastic Lens															
<b>•   ECB27W-303sw(3000K/4000K/5000K) <span style="background-color: #FFD700; padding: 2px;">3 CCT &amp; 3 Wattage Selectable</span></b>															
27 W	60W CFL,100W MHL	AC100-277V	3645 - 4050 lm	360°	80	135-159 lm/W	0.9	0.3 A	E26	50,000 Hrs.	<b>Type B</b>	2.36" x 7.42"	Yes	Yes	1
18 W	42W CFL,70W MHL		2484 - 2790 lm												
12 W	30W CFL,50W MHL		1680 - 1908 lm												
<b>•   ECB63W-303sw(3000K/4000K/5000K) <span style="background-color: #FFD700; padding: 2px;">3 CCT &amp; 3 Wattage Selectable</span></b>															
63 W	120W CFL,175W MHL	AC100-277V	8694 - 9513 lm	360°	80	138-158 lm/W	0.9	0.7 A	E39	50,000 Hrs.	<b>Type B</b>	3.34" x 10.11"	Yes	Yes	1
54 W	120W CFL,175W MHL		7560 - 8370 lm												
36 W	80W CFL,150W MHL		5112 - 5724 lm												
<b>•   ECB120W-303SW(3000K/4000K/5000K) <span style="background-color: #FFD700; padding: 2px;">3 CCT &amp; 3 Wattage Selectable</span></b>															
120 W	200W CFL,400W MHL	AC100-277V	16440 - 18240 lm	360°	80	137-157 lm/W	0.9	1.2 A	E39	50,000 Hrs.	<b>Type B</b>	5.11" x 11.14"	Yes	Yes	1
100 W	150W CFL,250W MHL		13862 - 15572 lm												
80 W	150W CFL,250W MHL		11280 - 12560 lm												

\* Vertical application only

**2700K** Warm White

**3000K** Soft White

**4000K** Bright White

**5000K** Cool White

# Commercial Light Engine-MPLR



Our light engines are made for seamless light output and hassle-free installation. Perfect for existing light fixtures, once your old incandescent, fluorescent or LED integrated light fixture burns out, simply retrofit this MPLR (multi-purpose LED retrofit) into the fixture's housing. With a magnetic backplate, simply stick the retrofit to the housing for even more convenient application. Eliminate the chore of replacing entire fixtures and reduce unsightly hot spots. For optimal light output, Euri Lighting recommends retrofitting fixtures 16" or less in diameter.



EMP-2000cec-15



EMP-2000cec-20

Damp Rated True Color

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Center Beam	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	ETL	E-star	CEC	Dim.	Qty.	
RETROFIT LED LINE Commercial Products												* Clear Plastic Lens						
EMP-2000cec-15(3000K/4000K/5000K) <b>3 CCT Selectable</b>																		
15 W	N/A	120V	1350 lm	110°	N/A	90+	90 lm/W	0.9	0.14 A	Hardwire	50,000 Hrs.	5.12" x 1.22"	Yes	Yes	Yes	Triac	1	
EMP-2000cec-20(3000K/4000K/5000K) <b>3 CCT Selectable</b>																		
20 W	N/A	120V	1800 lm	110°	N/A	90+	90 lm/W	0.9	0.19 A	Hardwire	50,000 Hrs.	6.69" x 1.22"	Yes	Yes	Yes	Triac	1	

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

# Commercial LED Downlight



Versatile and innovative, Euri Lighting's LED Downlight Series offers a wide variety of downlights in convenient sizes, favorable color temperatures, and applications. Built for recessed lighting, these LED downlights are carefully designed to allow instant and uncomplicated installation within any residential or commercial space.

## Downlight Class

### ■ LED Retrofit Downlight

DLC-4020e (5 - 6 in. Housing)

DLC-5020e (5 - 6 in. Housing)

DLC4-1040e (4 in. Housing)

DLC4-10W100swj (4 in. Housing) / DLC6-14W100swj (6 in. Housing)

### ■ LED Commercial Downlight

DLC6C-16W203swej (6 in. Housing) / DLC8C-24W203swej (8 in. Housing)

### ■ LED Slim Downlight with Junction Box

DLC4S-2040e / DLC4S-2050e (4 in. Fixed)

DLC6S-2050e (6 in. Fixed)

DLC6S-2040ej (6 in. Fixed)

DLC4SQ-2040e (4 in. Fixed)

DLC6SQ-2000e / DLC6SQ-2040e (6 in. Fixed)

DLC4S-10W205se (4 in. Fixed) / DLC6S-12W205se (6 in. Fixed)

### ■ LED Gimbal Downlight with Junction Box

DLC4G-9W105se (4 in. Fixed) / DLC6G-13W105se (6 in. Fixed)

# LED Downlight

Commercial Lighting



Damp Rated Wet Rated True Color

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	ETL	E-star	CEC	T24	JA8	Dim.	Qty.						
<b>LED Retrofit Downlight</b>												* Frosted Plastic Lens													
<b>DLC-4020e(2700K)</b>																									
12 W	75W	120 V	840 lm	96°	90+	70 lm/W	0.9	0.11A	E26	35,000 Hrs.	7.5" x 3"	Yes	No	Yes	Yes	No	Yes	Triac	1						
<b>DLC-5020e(2700K)</b>																									
18 W	115W	120 V	1260 lm	96°	90+	70 lm/W	0.9	0.16 A	E26	35,000 Hrs.	7.5" x 3"	Yes	No	Yes	Yes	No	Yes	Triac	1						
<b>DLC4-1040e(4000K)</b>																									
13 W	75W	120 V	800 lm	95°	90+	61 lm/W	0.9	0.01 A	E26	50,000 Hrs.	5.7" x 2.5"	Yes	No	Yes	No	Yes	No	Triac	1						
<b>DLC4-10W100swj(2700K/3000K/3500K/4000K/5000K)</b> <b>5 CCT Selectable</b>																									
10W	50W	120 V	650-750 lm	120°	80	65-75 lm/W	0.9	0.09 A	E26 Adapter	50,000 Hrs.	5.1" x 2.8"	No	Yes	Yes	No	Yes	No	Triac	1						
<b>DLC6-14W100swj(2700K/3000K/3500K/4000K/5000K)</b> <b>5 CCT Selectable</b>																									
14W	70W	120 V	900-1000 lm	120°	80	64-71 lm/W	0.9	0.125 A	E26 Adapter	50,000 Hrs.	5.1" x 2.8"	No	Yes	Yes	No	Yes	No	Triac	1						
<b>LED Commercial Downlight</b>												* Frosted Plastic Lens													
<b>DLC6C-16W203swej(3000K/3500K/4000K)</b> <b>3 CCT &amp; 3 Wattage Selectable</b>																									
7 W	N/A	120-277 V	700 lm	90°	90+	83-100 lm/W	0.9	0.15-0.04 A	Hard Wire	50,000 Hrs.	8.2" x 5.1"	No	Yes	Yes	No	Yes	Yes	0-10V	1						
10 W			1000 lm																						
16 W			1500 lm																						
<b>DLC8C-24W203swej(3000K/3500K/4000K)</b> <b>3 CCT &amp; 3 Wattage Selectable</b>																									
10 W	N/A	120-277 V	1000 lm	90°	90+	90-100 lm/W	0.9	0.185-0.06 A	Hard Wire	50,000 Hrs.	10.2" x 5.8"	No	Yes	Yes	No	Yes	Yes	0-10V	1						
15 W			1500 lm																						
24 W			2000 lm																						

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

# LED Downlight

## Commercial Lighting



Damp Rated Wet Rated True Color

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	ETL	E-star	T24	JA8	Dim.	Qty.
<b>LED Downlight Slim Downlight with Junction Box (Can-less)</b>																	
<b>DLC4S-2040e(4000K), DLC4S-2050e(5000K)</b>																	
9W	60W	120 V	600 lm	120°	80	66 lm/W	0.9	0.075 A	Junction Box	30,000 Hrs.	4.7" x 0.4"	Yes	Yes	No	No	Triac	1
<b>DLC6S-2050e(5000K)</b>																	
12W	100W	120 V	900 lm	120°	80	75 lm/W	0.9	0.1 A	Junction Box	30,000 Hrs.	6.7" x 0.4"	Yes	Yes	No	No	Triac	1
<b>DLC6S-2040ej(4000K)</b>																	
12W	100W	120 V	900 lm	120°	90+	75 lm/W	0.9	0.1 A	Junction Box	50,000 Hrs.	6.9" x 0.4"	Yes	Yes	No	Yes	Triac	1
<b>DLC4S-10W205se(2700K/3000K/3500K/4000K/5000K)</b> <b>5 CCT Selectable</b>																	
10W	60W	120 V	600 lm	120°	90+	60 lm/W	0.9	0.075 A	Junction Box	50,000 Hrs.	4.8" x 0.4"	Yes	Yes	No	Yes	Triac	1
<b>DLC6S-12W205se(2700K/3000K/3500K/4000K/5000K)</b> <b>5 CCT Selectable</b>																	
12W	100W	120 V	990 lm	120°	90+	82 lm/W	0.9	0.1 A	Junction Box	50,000 Hrs.	6.8" x 0.4"	Yes	Yes	No	Yes	Triac	1
<b>DLC4SQ-2040e(4000K)</b>																	
9W	60W	120 V	600 lm	120°	80	66 lm/W	0.9	0.075 A	Junction Box	30,000 Hrs.	4.7" x 0.4"	Yes	Yes	No	No	Triac	1
<b>DLC6SQ-2000e(3000K), DLC6SQ-2040e(4000K)</b>																	
12W	100W	120 V	900 lm	120°	80	75 lm/W	0.9	0.1 A	Junction Box	30,000 Hrs.	6.7" x 0.4"	Yes	Yes	No	No	Triac	1
<b>LED Gimbal Downlight with Junction Box (Can-less)</b>																	
<b>DLC4G-9W105se(2700K/3000K/3500K/4000K/5000K)</b> <b>5 CCT Selectable</b>																	
9W	65W	120 V	650 lm	45°	90+	72 lm/W	0.9	0.078 A	Junction Box	50,000 Hrs.	4.7" x 1.1"	Yes	Yes	Yes	No	Triac	1
<b>DLC6G-13W105se(2700K/3000K/3500K/4000K/5000K)</b> <b>5 CCT Selectable</b>																	
13W	100W	120 V	1000 lm	45°	90+	76 lm/W	0.9	0.111 A	Junction Box	50,000 Hrs.	6.1" x 1.4"	Yes	Yes	Yes	No	Triac	1

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

# Commercial LED Troffer



Eliminating maintenance worries and costs, Euri Lighting's LED Troffers are built for uncomplicated installation, instant replacement, and long-lasting LED performance. Everything about these LED troffers, from the high lumen output to low-profile design make for a smart energy saving alternative to commercial fluorescent lighting.



ETF22-35W103sw-2



ETF24-50W103sw-2

Damp Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (W x H)	ETL	DLC 5.1	Dim.	Qty.
LED FIXTURES Commercial Products										* Frosted Plastic Lens			
<b>ETF22-35W103sw-2(3000K/4000K/5000K)</b> <b>3 CCT &amp; 2 Wattage Selectable</b>													
25 W 35 W	AC120-277V	3125 lm 4375 lm	120°	80	125 lm/W	0.9	0.33 A	50,000 Hrs.	23.74" x 23.74"	Yes	Yes	0-10V	2
<b>ETF24-50W103sw-2(3000K/4000K/5000K)</b> <b>3 CCT &amp; 3 Wattage Selectable</b>													
33 W 40 W 50 W	AC120-277V	4125 lm 5000 lm 6250 lm	120°	80	125 lm/W	0.9	0.45 A	50,000 Hrs.	23.74" x 47.36"	Yes	Yes	0-10V	2

2700K Warm White

3000K Soft White


4000K Bright White

5000K Cool White


# Commercial LED Flat Panel



Ideal for offices, schools, and other commercial applications, Euri Lighting's LED Panel Series triumphs over inefficient fluorescent lighting. Carefully designed for optimal performance, these LED panels are built with a back-lit and durable lens, ensuring bright light is evenly distributed free of glare.

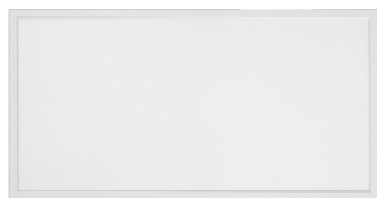

**2 x 4 Class**  
EBPN24-50WS2000-2



**1 x 4 Class**  
EBPN14-40W130sw-2



**2 x 2 Class**  
EBPN22-40WS2000-2



**Back-lit**

Damp Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (W x L x H)	Lens Type	ETL	UL	DLC 5.1	Dim.	Qty.	
LED FIXTURES Commercial Products											* Frosted Plastic Lens					
<b>EBPN24-50WS2000-2</b> (3000K/4000K/5000K) <b>3 CCT &amp; 3 Wattage Selectable - Back-lit</b>																
30 W 40 W 50 W	AC100 - 277V	3900 lm 5200 lm 6500 lm	110°	80	130 lm/W	0.9	0.28 A 0.38 A 0.47 A	50,000 Hrs.	47.6" x 23.7" x 0.4"	PC	Yes	No	Yes	0-10V	2	
<b>EBPN14-40W103sw-2</b> (3500K/4000K/5000K) <b>3 CCT &amp; 3 Wattage Selectable - Back-lit</b>																
25 W 30 W 40 W	AC120 - 277V	3125 lm 3750 lm 5000 lm	110°	80	125 lm/W	0.9	1 A	50,000 Hrs.	47.6" x 11.73" x 0.4"	PMMA	No	Yes	Yes	0-10V	2	
<b>EBPN22-40WS2000-2</b> (3000K/4000K/5000K) <b>3 CCT &amp; 3 Wattage Selectable - Back-lit</b>																
20 W 30 W 40 W	AC100 - 277V	2600 lm 3900 lm 5200 lm	110°	80	130 lm/W	0.9	0.19 A 0.28 A 0.38 A	50,000 Hrs.	23.7" x 23.7" x 0.4"	PC	Yes	No	Yes	0-10V	2	

**2700K** Warm White

**3000K** Soft White

**4000K** Bright White

**5000K** Cool White

# Commercial LED Linear Light



Powerful LED Linear products build to withstand today's business demands. With versatility in mind, these LED products were built to provide installation and maintenance ease while expressing a clean and modern look. We work in compliance with institutions like DLC, UL, ETL, Energy Star, among others to ensure the safety and sustainability of our products. Our commercially ranked products are suitable for use in offices, garages, workshops, warehouses, retail spaces, medical facilities and commercial buildings.



New Item Damp Rated IP65 Protection Fully Enclosed Suitable

Input Power	Input Voltage	Lumen Output	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Material	Size (W x L x H)	ETL	DLC 5.1	Dim.	Qty.	
LED FIXTURES Residential & Commercial Products														
<b>ELS4-45W203sw</b> (3500K/4000K/5000K) <b>3 CCT &amp; 3 Wattage Selectable</b>														
25/35/45 W	120-277 V	3250 lm - 5850 lm	80	130 lm/W	0.9	0.17 - 0.39A	50,000 Hrs.	Frosted Plastic & Steel Housing	47.5" x 2.6" x 2.6"	Yes	Yes	0-10V	1	
<b>ERW4-50W203sw</b> (3000K/4000K/5000K) <b>3 CCT &amp; 3 Wattage Selectable</b>														
25/38/50 W	120-277 V	3250 lm - 6500 lm	80	130 lm/W	0.9	0.17 - 0.39A	50,000 Hrs.	Frosted Plastic & Steel Housing	48.3" x 4.3" x 2.2"	Yes	Yes	0-10V	1	
<b>EVT4-50W103sw</b> (3000K/4000K/5000K) <b>3 CCT &amp; 3 Wattage Selectable</b>														
25/38/50 W	120-277 V	3250 lm - 6500 lm	80	130 lm/W	0.9	0.17 - 0.39A	50,000 Hrs.	Frosted Plastic & Steel Housing	48.3" x 4.3" x 2.2"	Yes	Yes	0-10V	1	
<b>ELS8-90W203sw</b> (3500K/4000K/5000K) <b>3 CCT &amp; 3 Wattage Selectable</b>														
65/75/90 W	120-277 V	8500 lm - 11700 lm	80	130 lm/W	0.9	0.17 - 0.83A	50,000 Hrs.	Frosted Plastic & Steel Housing	95" x 2.6" x 2.6"	Yes	Yes	0-10V	1	

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

# Commercial LED Architectural Linear Light



Elevate your space with Euri Lighting's dynamic LED Linear Architectural series that brings versatility and creative freedom to any design. With its modular system, you can customize the layout and create geometric shapes that exude modern elegance. Available in sleek Black, Silver, and White, this luminaire is perfect for enhancing the ambiance of various settings such as Lobbies, Offices, and Showrooms. Choose from multiple mounting options including Cable Suspended, Direct Ceiling Surface, and Direct Wall Surface to captivate your audience in any space.

This EUD series features a Dual 3 CCT field-selectable feature, allowing you to easily switch to your preferred color temperature with a simple switch located on the driver body.

## Architectural Linear Light Class

### ■ LED 4ft. Up and Down Linear Light

EUD4-50W103sw-W (White Housing)

EUD4-50W103sw-S (Metal Silver Housing)

EUD4-50W103sw-B (Black Housing)

### ■ LED 8ft. Up and Down Linear Light


EUD8-100W103sw-W (White Housing)

EUD8-100W103sw-S (Metal Silver Housing)

EUD8-100W103sw-B (Black Housing)

# LED Architectural Linear Light


## Commercial Lighting

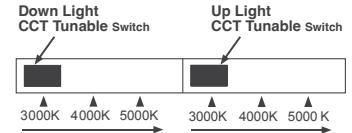

Damp Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Material	Size (W x L x H)	ETL	DLC 5.1	Dim.	Qty.
LED FIXTURES Residential & Commercial Products														
EUD4-50W103sw-W(3000K/4000K/5000K) <b>3 CCT Selectable</b> <b>Dual CCT Selectable</b>														
50 W	120-277 V	Up Light - 1950lm Down Light - 4550lm	100°	80	130 lm/W	0.9	0.6 A	50,000 Hrs.	Frosted Plastic Lens & White housing	47.4" x 2.7" x 3.1"	Yes	Yes	0-10V	1
EUD4-50W103sw-S(3000K/4000K/5000K) <b>3 CCT Selectable</b> <b>Dual CCT Selectable</b>														
50 W	120-277 V	Up Light - 1950lm Down Light - 4550lm	100°	80	130 lm/W	0.9	0.6 A	50,000 Hrs.	Frosted Plastic Lens & Metal Silver housing	47.4" x 2.7" x 3.1"	Yes	Yes	0-10V	1
EUD4-50W103sw-B(3000K/4000K/5000K) <b>3 CCT Selectable</b> <b>Dual CCT Selectable</b>														
50 W	120-277 V	Up Light - 1950lm Down Light - 4550lm	100°	80	130 lm/W	0.9	0.6 A	50,000 Hrs.	Frosted Plastic Lens & Black housing	47.4" x 2.7" x 3.1"	Yes	Yes	0-10V	1

\* Suspended mounting kits are included in all sets.

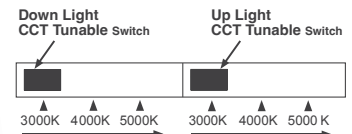

Damp Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Material	Size (W x L x H)	ETL	DLC 5.1	Dim.	Qty.
LED FIXTURES Residential & Commercial Products														
EUD8-100W103sw-W(3000K/4000K/5000K) <b>3 CCT Selectable</b> <b>Dual CCT Selectable</b>														
100 W	120-277 V	Up Light - 3900lm Down Light - 9100lm	100°	80	130 lm/W	0.9	0.5 A	50,000 Hrs.	Frosted Plastic Lens & White housing	94.8" x 2.7" x 3.1"	Yes	Yes	0-10V	1
EUD8-100W103sw-S(3000K/4000K/5000K) <b>3 CCT Selectable</b> <b>Dual CCT Selectable</b>														
100 W	120-277 V	Up Light - 3900lm Down Light - 9100lm	100°	80	130 lm/W	0.9	0.5 A	50,000 Hrs.	Frosted Plastic Lens & Metal Silver housing	94.8" x 2.7" x 3.1"	Yes	Yes	0-10V	1
EUD8-100W103sw-B(3000K/4000K/5000K) <b>3 CCT Selectable</b> <b>Dual CCT Selectable</b>														
100 W	120-277 V	Up Light - 3900lm Down Light - 9100lm	100°	80	130 lm/W	0.9	0.5 A	50,000 Hrs.	Frosted Plastic Lens & Black housing	94.8" x 2.7" x 3.1"	Yes	Yes	0-10V	1

\* Suspended mounting kits are included in all sets.

### LED Suspended Up & Down Light Accessory



White X shape connector  
EUD4-X-W



White L shape connector  
EUD4-L-W



White T shape connector  
EUD4-T-W



Silver X shape connector  
EUD4-X-S



Silver L shape connector  
EUD4-L-S



Silver T shape connector  
EUD4-T-S



Black X shape connector  
EUD4-X-B



Black L shape connector  
EUD4-L-B



Black T shape connector  
EUD4-T-B

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

# Commercial LED Canopy Light



The Euri Canopy light is a great way to save on your lighting bill for commercial spaces like garages, warehouses, gas stations, and more. UL and DLC (Design Lights Consortium) certified, these lights pass and assure high standards of quality. Rated IP65 and wet rated, this light is robust and durable against outdoor conditions. Enjoy additional quality features like 3 CCT selectability, 0-10V dimming, and weather-proof build.



**Square**  
ECS-150W1050



**Round**  
ECR-55W103s



**Round**  
ECR-100W103s

IP65 Protection Wet Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (W x L x H)	UL	DLC	Dim.	Qty.	
LED FIXTURES Commercial Products										* Frosted Plastic Lens				
<b>ECS-150W1050</b> (5000K)														
150 W	100-277V	20250 lm	120°	80	135 lm/W	0.9	1.67 A	50,000 Hrs.	15" x 15" x 3.3"	Yes	Yes	1-10V	1	
<b>ECR-55W103s</b> (3000K/4000K/5000K) <b>3 CCT Selectable</b>														
55 W	100-277V	6875 - 7700 lm	150°	80	125-140 lm/W	0.9	0.55 A	50,000 Hrs.	10" x 10" x 3.1"	Yes	Yes	1-10V	1	
<b>ECR-100W103s</b> (3000K/4000K/5000K) <b>3 CCT Selectable</b>														
100 W	100-277V	12500 - 14000 lm	150°	80	125-140 lm/W	0.9	1 A	50,000 Hrs.	11" x 11" x 3.1"	Yes	Yes	1-10V	1	

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

# Commercial LED UFO High Bay Light



Euri's UFO LED High Bay achieves high luminous efficiency with maximum energy savings for commercial locations like warehouses, garages, and facilities. Moreover, additional accessories like the motion sensor or remote control allows for a custom experience to choose desired light settings and operation. Enjoy features like dimmability, durable IP65 weather-proof rating, and quality ensured DLC certification.



EUHB-150W3000sw

EUHB-240W3000sw



Microwave Motion Sensor  
MMS-3



Remote Control  
MMS-RC-3

IP65 Protection Wet Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (Ø x H)	UL	DLC 5.1	Dim.	Qty.	
LED FIXTURES Commercial Products										* Frosted Plastic Lens				
<b>EUHB-150W-3000sw</b> (3000K/4000K/5000K) <b>3 CCT &amp; 3 Wattage Selectable</b> <span style="float: right;">*Compatible with motion sensor: MMS-3, Compatible with remote controller: MMS-RC-3</span>														
100 W 120 W 150 W	120-277 V	13500 - 15000 lm 16200 - 18000 lm 20250 - 22500 lm	90°	80	135-150 lm/W	0.9	1.5 A	50,000 Hrs.	11" x 5.8"	Yes	Yes	0-10V	1	
<b>EUHB-240W-3000sw</b> (3000K/4000K/5000K) <b>3 CCT &amp; 3 Wattage Selectable</b> <span style="float: right;">*Compatible with motion sensor: MMS-3, Compatible with remote controller: MMS-RC-3</span>														
200 W 220 W 240 W	120-277 V	27000 - 30000 lm 29700 - 33000 lm 32400 - 36000 lm	90°	80	135-150 lm/W	0.9	2.4 A	50,000 Hrs.	13.3" x 6.1"	Yes	Yes	0-10V	1	

\* With adopted dual PD technology, the High Bay PIR sensor is able to differentiate artificial light from natural light once installed in the fixture. The High Bay will also automatically turn off once the ambient brightness exceeds the preset lux level.

\* **Motion Sensor and Remote Control accessories are sold separately.**

2700K Warm White

3000K Soft White


4000K Bright White

5000K Cool White

# Commercial LED Linear High Bay Light



Euri's LED Linear High Bay Light, is a versatile lighting solution featuring tunable CCT between 4000K and 5000K. It offers 3-step wattage adjustment to suit various applications, ensuring both flexibility and energy efficiency. Certified to ETL and DLC 5.1 Premium standards, this high-performance light delivers reliable, durable quality and superior illumination for any setting.

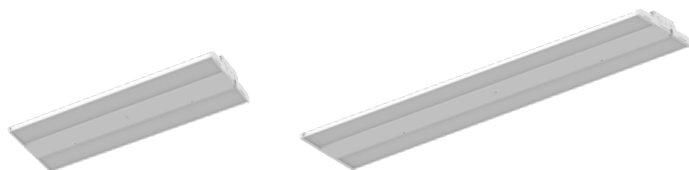

**2 ft. Linear High Bay Light**  
ELHB2-155W1023cws

**4 ft. Linear High Bay Light**  
ELHB4-320W1023cws

New Item Damp Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (W x H)	ETL	DLC 5.1	Dim.	Qty.	
LED FIXTURES Commercial Products										* Frosted Plastic Lens				
<b>NEW</b> <b>ELHB2-155W1023cws(4000K/5000K)</b> <b>2 CCT &amp; 3 Wattage Selectable</b>														
90 W 130 W 155 W	120-277 V	12150 lm 17550 lm 21000 lm	90°	80	135 lm/W	0.9	1.43 A	50,000 Hrs.	11.92" x 23.77"	Yes	Yes	0-10V	1	
<b>NEW</b> <b>ELHB4-320W1023cws(4000K/5000K)</b> <b>2 CCT &amp; 3 Wattage Selectable</b>														
220 W 265 W 320 W	120-277 V	30000 lm 36000 lm 43200 lm	90°	80	135 lm/W	0.9	2.77 A	50,000 Hrs.	11.92" x 47.4"	Yes	Yes	0-10V	1	

**2700K** Warm White

**3000K** Soft White

**4000K** Bright White

**5000K** Cool White

# Commercial LED Area Light



Euri's LED Area Light featuring Lumileds 2835 LED chips with high efficiency (150-170 lumens per watt). It offers 3 color temperatures and 3 wattage selections. With an IP65 rating for outdoor use and over 110-degree light distribution angle, it provides bright, clear illumination. This light is UL/cUL and DLC 5.1 Premium certified, ensuring safety and eligibility for utility rebates, making it ideal for various outdoor lighting applications.



**LED Area Light**  
EAL-150W1033cws  
**High Voltage LED Area Light**  
EALH-150W1033cws



**LED Area Light**  
EAL-300W1033cws  
**High Voltage LED Area Light**  
EALH-300W1033cws



**Direct Mounting**  
EAL-DirectMount



**Slip Fitter Mounting**  
EAL-SlipFitter



**Trunnion Mounting**  
EAL-TrunnionMount



**Microwave Motion Sensor**  
MMS-3



**Remote Control**  
MMS-RC-3

IP65 Protection Wet Rated High Voltage

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (W x L x H)	UL	DLC 5.1	Dim.	Qty.
<b>LED FIXTURES</b> Commercial Products													
<b>EAL-150W1033cws(3000K/4000K/5000K)</b> <b>3 CCT &amp; 3 Wattage Selectable</b> <span style="float: right;">*Compatible with motion sensor: MMS-3, Compatible with remote controller: MMS-RC-3</span>													
100 W 120 W 150 W	120-277 V	14500 - 16000 lm 17400 - 19200 lm 21667 - 23968 lm	Type III	70	150-170 lm/W	0.9	0.58 A	50,000 Hrs.	8.66" x 2.07" x 16.63"	Yes	Yes	0-10V	1
<b>EAL-300W1033cws(3000K/4000K/5000K)</b> <b>3 CCT &amp; 3 Wattage Selectable</b> <span style="float: right;">*Compatible with motion sensor: MMS-3, Compatible with remote controller: MMS-RC-3</span>													
200 W 240 W 300 W	120-277 V	30000 - 32600 lm 36000 - 39120 lm 45000 - 49000 lm	Type III	70	150-170 lm/W	0.9	1.1 A	50,000 Hrs.	11.89" x 2.07" x 20.05"	Yes	Yes	0-10V	1
<b>EALH-150W1033cws(3000K/4000K/5000K)</b> <b>3 CCT &amp; 3 Wattage Selectable</b> <span style="float: right;">*Compatible with motion sensor: MMS-3, Compatible with remote controller: MMS-RC-3</span>													
100 W 120 W 150 W	277-480 V	14500 - 16000 lm 17400 - 19200 lm 21667 - 23968 lm	Type III	70	130-150 lm/W	0.9	0.58 A	50,000 Hrs.	8.66" x 2.07" x 16.63"	Yes	Yes	0-10V	1
<b>EALH-300W1033cws(3000K/4000K/5000K)</b> <b>3 CCT &amp; 3 Wattage Selectable</b> <span style="float: right;">*Compatible with motion sensor: MMS-3, Compatible with remote controller: MMS-RC-3</span>													
200 W 240 W 300 W	277-480 V	30000 - 32600 lm 36000 - 39120 lm 45000 - 49000 lm	Type III	70	130-150 lm/W	0.9	1.1 A	50,000 Hrs.	11.89" x 2.07" x 20.05"	Yes	Yes	0-10V	1

\* With adopted dual PD technology, the Area Light Sensor is able to differentiate artificial light from natural light once installed in the fixture. The Area Light will also automatically turn off once the ambient brightness exceeds the preset lux level.

\* **Motion Sensor and Remote Control accessories are sold separately.**

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

# Commercial LED Wall Pack



Providing safety and security, Euri Lighting's LED Wall Pack Series performs best in outdoor commercial applications. With a strong polycarbonate lens, these LED wall packs distribute directional light without sacrificing any lumen output. For maximum energy efficiency, smart models include Dusk to Dawn technology, turning on and off with the rising and setting of the sun.



**Mini Wall Pack**  
EOL-WL01BK-2100e



**Mini Wall Pack**  
EOL-WL02BK-2100e



**Traditional Wall Pack**  
EWP-80W103sw



**Slim Wall Pack**  
ESWP-120W1033cws

IP65 Protection
 Photocell
 Wet Rated
 New Item

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (W x H x L)	UL	ETL	DLC	E-star	Dim.	Qty.
<b>LED FIXTURES</b> Commercial Products																
* Matte Black Aluminum Die Cast Plastic Lens																
<b>EOL-WL01BK-2100e</b> (3000K/3500K/4000K/5000K/6500K) <b>5 CCT Selectable</b>																
15.8 W	120 V	1600 lm	100°	80	101 lm/W	0.7	0.15 A	Direct Wiring	50,000 Hrs.	5.1" x 8.4" x 2.2"	No	Yes	No	Yes	No	1
<b>EOL-WL02BK-2100e</b> (3000K/3500K/4000K/5000K/6500K) <b>5 CCT Selectable</b>																
15.8 W	120 V	1600 lm	100°	80	101 lm/W	0.7	0.15 A	Direct Wiring	50,000 Hrs.	5.1" x 8.4" x 2.2"	No	Yes	No	Yes	No	1
<b>EWP-80W103sw</b> (3000K/4000K/5000K) <b>3 CCT &amp; 5 Wattage Selectable</b>																
16 W	120-277V	2160 - 2400 lm	110°	80	135-145 lm/W	0.9	0.85 A	N/A	50,000 Hrs.	14.3" x 7.3" x 7.3"	Yes	No	Yes	No	0-10V	1
32 W		4320 - 4800 lm														
48 W		6480 - 7200 lm														
64 W		8640 - 9600 lm														
80 W		10800 - 12000 lm														
<b>ESWP-120W1033cws</b> (3000K/4000K/5000K) <b>3 CCT &amp; 4 Wattage Selectable</b>																
30 W	120-277 V	3810 - 4080 lm	100°	70	133-140 lm/W	0.9	1.1 A	N/A	50,000 Hrs.	13.39" x 4.49" x 9.45	Yes	No	Yes	No	0-10V	1
60 W		7620 - 8160 lm														
90 W		11430 - 12240 lm														
120W		15321 - 16353 lm														

2700K Warm White

3000K Soft White

4000K Bright White


5000K Cool White

# Commercial Product Accessory



Engineered to withstand deterioration agents and fit flat panels, our mounting hardware is suitable for use in offices, garages, workshops, warehouses, retail spaces, medical facilities and commercial buildings.

## LED Flat Panel Surface Mount Kit

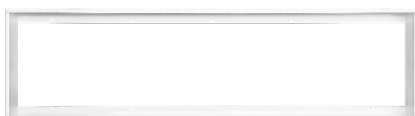


**EPN14-SMK**  
1x4ft. LED Panel Surface mount kit


## LED Downlight Goof Ring & Mounting Plate




**DLC6C-GoofRing6"**  
Goof ring for extending from 8-1/4" to 10-1/2" Maximum Ceiling Cutout 9" for *DLC6C-16W203swej*



**DLC8C-GoofRing8"**  
Goof ring for extending from 10-1/4" to 12-1/2" Maximum Ceiling Cutout 10-15/16" for *DLC8C-24W203swej*



**DLC6/8C-TGridPlate**  
Mounting plate for new construction or remodel T-grid ceilings.



**DLC6/8C-Stud/JoistPlate**  
Mounting plate for new construction Stud/Joist ceilings



*Euri*  
Euri Company

**Euri Company** | A Division of **IRTRONIX** Inc.

20900 Normandie Avenue Bldg. B Torrance, CA 90502  
Tel: 310.787.1100 | Fax: 310.787.1166 | [www.euricompany.com](http://www.euricompany.com)

©2025 Euri Company. All Rights Reserved