



# 2025

## PRODUCT GUIDE



# The TCP Advantage

As an industry leader in lighting, TCP is driven to provide world class products which offer the highest quality of illumination. Our cutting-edge technology combined with industry leading innovation has put us at the forefront of the lighting revolution.



# Table of Contents

|                                  |                |
|----------------------------------|----------------|
| Indoor LED Luminaires .....      | <b>3-20</b>    |
| Outdoor LED Luminaires .....     | <b>21-34</b>   |
| LED Horticulture Lights .....    | <b>35-40</b>   |
| LED Decorative Fixtures .....    | <b>41-56</b>   |
| LED Commercial Downlights .....  | <b>57-60</b>   |
| LED Residential Downlights ..... | <b>61-64</b>   |
| LED T8 and T5 Tubes .....        | <b>65-80</b>   |
| LED HID Lamps .....              | <b>81-90</b>   |
| LED Filament Lamps .....         | <b>91-106</b>  |
| LED Lamps .....                  | <b>107-136</b> |
| LED Starlight Series Lamps ..... | <b>137-138</b> |
| LED Exit and Emergency .....     | <b>139-146</b> |




# Online Tools

The TCP website, [tcp.com](http://tcp.com), hosts tools and guides designed to make your next lighting project go smoothly. Scan the QR codes below or follow the URLs to find these tools and more.

## **TCP Central**

---

TCP Central is the online hub for everything TCP – product information, spec sheets, pricing, availability, and more.  
[www.tcp.com/tcpcentral](http://www.tcp.com/tcpcentral)



## **Lighting Layout Tool**

---

Plan your lighting layout with our online tools to make sure you have the ideal lighting levels for your needs.  
[www.tcp.com/tcp-distributor-hub/lighting-layout-tool](http://www.tcp.com/tcp-distributor-hub/lighting-layout-tool)



## **Utility Rebates**

---

Many of the fixtures featured in this catalog can qualify for energy efficiency rebates provided by utility companies.  
[www.tcp.com/rebates](http://www.tcp.com/rebates)



## **Request a Quote**

---

Price your project, find a distributor, research warranties and rebates, and much more.  
[www.tcp.com/get-started](http://www.tcp.com/get-started)




# Indoor LED Luminaires

Whether you are looking for high bays, troffers, or general purpose strips, TCP offers a full complement of indoor lighting products, featuring the latest in LED technology.

## In this section:

|                                           |              |
|-------------------------------------------|--------------|
| Q Series Fixtures.....                    | <b>4-6</b>   |
| High Bays .....                           | <b>7-10</b>  |
| DT Series Flat Panels .....               | <b>11-12</b> |
| Accent Panels Artistic Lenses .....       | <b>13</b>    |
| Select Series General Purpose Strips..... | <b>14</b>    |
| LED Wrap Light.....                       | <b>15</b>    |
| Select Series LED Vapor Tight.....        | <b>16</b>    |
| Volumetric Troffers.....                  | <b>17</b>    |
| Retrofit Kits.....                        | <b>18-19</b> |

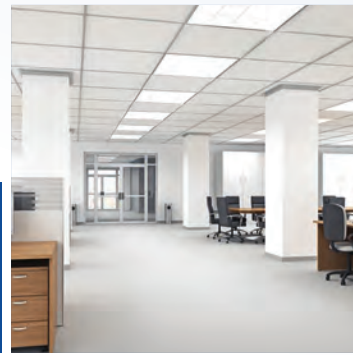

# Q Series Aisle Light

The Q Series Aisle Light by TCP (QAL) incorporates the special needs of grocery and high-end shopping applications into the fixture design.



## Features & Benefits

- Lens wrap-around design provides uplight to reduce cave effect
- Lightweight, quick-install construction
- Standard frosted lens for glare control
- No shadows for smooth, even lighting
- Damp location rated
- 0-10V smooth, no-flicker dimming
- Operating temperature: -4°F to 122°F
- Long 50,000 hour rated life
- Includes 6' quick connect 5-wire power cord
- 179° field angle

## Hardware Included

- 10' Cable Hanger
- 6' TCP Quick Connect 5-wire cord



## Catalog Ordering Matrix

| FAMILY                     | LENGTH     | VOLTAGE      | CONTROLS           | LUMEN PACKAGE <sup>1,2</sup>  | CRI                  | LIGHT BAR ANGLE | CCT                                       | OPTIONS   |
|----------------------------|------------|--------------|--------------------|-------------------------------|----------------------|-----------------|-------------------------------------------|-----------|
| QAL – Q Series Aisle Light | 4 – 4 Foot | U – 120-277V | ZD – 0-10V Dimming | A2 – 4725L (35W)              | Blank – 80+ CRI      | V4 – 12°        | 35K – 3500K<br>40K – 4000K<br>50K – 5000K | See Below |
|                            |            |              |                    | A3 – 6075L (45W)              |                      |                 |                                           |           |
|                            |            |              |                    | A4 – 7425L (55W) <sup>3</sup> |                      |                 |                                           |           |
|                            |            |              |                    | A8 – 14850L (110W)            |                      |                 |                                           |           |
|                            |            |              |                    | A2 – 4025L (35W)              | 9 – 90+ CRI<br>R9>50 |                 |                                           |           |
|                            |            |              |                    | A3 – 5175L (45W)              |                      |                 |                                           |           |
|                            |            |              |                    | A4 – 6325L (55W) <sup>3</sup> |                      |                 |                                           |           |
|                            |            |              |                    | A8 – 12650 (110W)             |                      |                 |                                           |           |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

- Q5DAISY4FT** – 5-wire Quick Connect wire to connect multiple units end-to-end
- QTLSMOUNT1** – Surface Mount Kit

Black and other special colors are a special order. Please contact your TCP representative for lead time.

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>3</sup> 55W unit is wattage selectable: 35/45/55W.



# Quick Connect by TCP

**QUICKCONNECT**  
by TCP

The Quick Connect System from TCP works with the Q Series fixtures to streamline installation, provide seamless lighting, and eliminate dark spots in a wide variety of applications.

**Used with:** Q Series Quick Connect High Bay, Aisle Light and General Purpose Strip fixtures.

## 6FT Quick Connect Cord 2-Step Installation

Step 1




Step 2




## 6FT Quick Connect System

Step 1

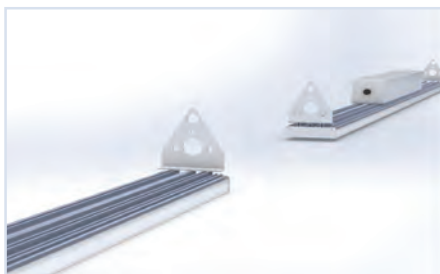


Align male and female ends of the Quick Connect triangles

Step 2

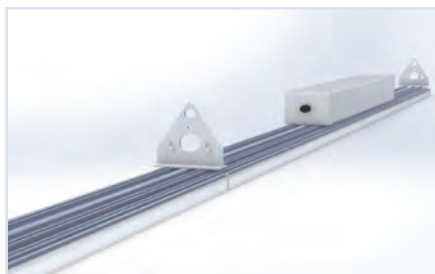

Slide together to fasten

Step 3

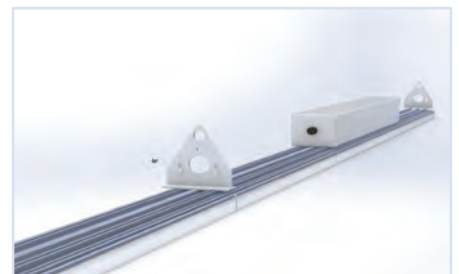


Fasten locking screw until tight

Step 4:



Mechanical connection complete

Step 5:

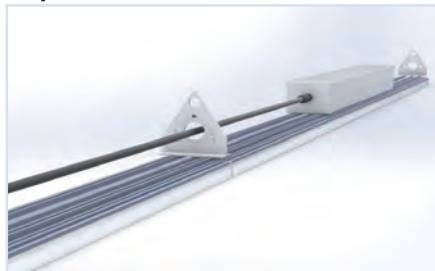

Use Q5DAISY4FT Quick Connect cable to daisy chain units together

**NOTE:**

Electrical Daisy Chain Capabilities using Q5DAISY4FT: 110W model = 8 units in series

# Q Series High Bay

The Q Series High Bay (QHB) features a lightweight extruded aluminum body, 2FT and 4FT length options and up to 60,000 lumens resulting in a versatile solution for endless applications.



## Features & Benefits

- Lightweight, quick-install construction
- Standard frosted lens for glare control
- No shadows for smooth, even lighting
- Damp location rated
- 0-10V smooth, no-flicker dimming
- Operating temperature: -4°F to 122°F
- 250W or 400W HID equivalent
- Long 50,000 hour rated life
- LED design provides wide beam spread and clean cutoff
- Optional battery backup and motion sensors available
- Includes 6-foot power cord

## Hardware Included

- 2 tong hangers
- 5' jack chains
- 6' pre-wired cord

## Catalog Ordering Matrix

| FAMILY                  | LENGTH     | VOLTAGE <sup>3</sup>                         | CONTROLS           | LUMEN PACKAGE <sup>1,2</sup>                                                                                                                                                   | CCT <sup>5</sup>           | OPTIONS   |
|-------------------------|------------|----------------------------------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------|
| QHB – Q Series High Bay | 2 – 2 Foot | U – 120-277V<br>H – 347-480V<br>C – 120-347V | ZD – 0-10V Dimming | A1 – 10,800L (80W)<br>A2 – 14,850L (110W)<br>E4 – 17,550L (130W)<br>A3 – 22,275L (165W)<br>A4 – 30,500L (220W)<br>A5 – 36,500L (270W) <sup>7</sup>                             | 40K – 4000K<br>50K – 5000K | See Below |
|                         | 4 – 4 Foot |                                              |                    | A1 – 10,800L (80W) <sup>9</sup><br>B2 – 14,850L (110W) <sup>6,9</sup><br>A4 – 30,500L (220W)<br>A5 – 36,500L (270W)<br>A6 – 44,550L (330W)<br>A8 – 60,000L (440W) <sup>8</sup> |                            |           |

### Factory Installed Options (add to end of catalog number)

- B** – Battery Backup<sup>4</sup>
- MS1** – Microwave Motion Sensor 120-277V
- LS1** – PIR Motion Sensor 120V, 277V or 347V
- LS1D** – PIR Motion/Daylight Sensor 120V, 277V or 347V
- LS4** – PIR Motion Sensor 240V or 480V

### Field Installed Accessories

**NA** – Not Available

<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end use application.  
<sup>2</sup> Actual wattage may differ by +/- 10%.  
<sup>3</sup> C – 120-347V is for Canada only.  
<sup>4</sup> Battery backup outputs 3,000L when in use.  
<sup>5</sup> Other CCT available special order. Longer lead times will apply.  
<sup>6</sup> QHB4 B2 lumen package is not compatible with any of the listed controls. Control solution coming soon.  
<sup>7</sup> QHB2 A5 lumen package coming soon.  
<sup>8</sup> QHB4 A8 lumen package coming soon.  
<sup>9</sup> Battery backup not available on QHB4 80W and 110W models.



# Select Series Linear High Bay



The Select Series Linear High Bay by TCP is a versatile solution for endless applications. With an all-metal frame and included mounting hardware, the HB by TCP is quick to install and will provide a long-lasting, durable light source for years to come.

## Features & Benefits

- Steel frame with no scalloping, pop riveted, and rounded-edge corners
- Frosted lens standard to eliminate glare
- Smooth, even lighting without shadows
- Damp location rated
- 0-10V smooth dimming
- 50,000 hour rated life
- Wide beam spread due to angled LED design providing clean cutoff
- Includes 6 foot power cord

## Catalog Ordering Matrix

| FAMILY                         | SIZE       | VOLTAGE       | DIMMING            | LUMEN PACKAGE <sup>1,2</sup>                  | CCT                             | OPTIONS   |
|--------------------------------|------------|---------------|--------------------|-----------------------------------------------|---------------------------------|-----------|
| HB – HB Series Linear High Bay | 2 – 2 Feet | U – 120V-277V | ZD – 0-10V Dimming | SW5 – 155/185/200W<br>(23,000/28,000/30,000L) | CCT – 4000K/5000K<br>Selectable | See Below |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

- UFOBRKT** – Adjustable Bracket
- UFOPMJB34** – 3/4" Pendant Mount Junction Box
- BILDAIP65EM30** – 30W IP65 Wet Location Rated Title 20 Backup Battery
- HM1** – Haisen 12V 0-10V Dimming Microwave Sensor
- HP1** – Haisen 12V 0-10V Dimming Passive Infrared Sensor
- HREMOTE<sup>3</sup>** – Remote for HM1 and HP1

Black color is standard. Other colors are special order only, extended lead times will apply. 100 pieces minimum order quantity for special color orders.

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>3</sup> Only one remote needed per job.

# Round High Bay

TCP's easy-to-install LED Round High Bay Luminaires have a sleek, robust design that can be paired with optional reflectors to meet a variety of application needs. Combining long-life and outstanding efficacy up to 165 LPW, TCP offers a cost-effective solution to maximize energy and maintenance savings.

Industra  
by TCP



## Features & Benefits

- Energy-efficient design delivers up to 165 LPW and uses up to 67% less energy than HID alternatives
- Smooth, uniform 0-10V dimming
- Instant on
- Long-life: 50,000 hours
- Heavy duty die-cast aluminum housing
- IP65 wet location rated
- Standard hanging hook and optional pendant mount adapter available for easy installation
- Mercury-free and environmentally friendly
- Battery backup is Title 20 Compliant

## Catalog Ordering Matrix

| FAMILY               | VOLTAGE                                    | CONTROLS           | LUMEN PACKAGE <sup>1,2</sup>                                                            | CCT                        | SPECIAL RATING                                                                         | PAINT COLOR                              | OPTIONS   |
|----------------------|--------------------------------------------|--------------------|-----------------------------------------------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------|------------------------------------------|-----------|
| RHB – Round High Bay | U – 120-277V<br>H – 347V/480V <sup>3</sup> | ZD – 0-10V Dimming | A1 – 13,200L (80W)<br>A2 – 16,500L (100W)<br>A3 – 24,750L (150W)<br>A4 – 33,000L (200W) | 40K – 4000K<br>50K – 5000K | Blank – No Additional Special Rating<br>NSF – NSF International Certified <sup>4</sup> | Blank – Black<br>WH – White <sup>5</sup> | See Below |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>3</sup> 347V/480V versions include a voltage step-down on top of the unit. Unit overall height is increased.

<sup>4</sup> NSF items are special order only, extended lead times will apply.

<sup>5</sup> Black color is standard. Other colors are special order only, extended lead times will apply. 100 pieces minimum order quantity for special color orders.

### Field Installed Accessories

RHBPMA34 – 3/4" Pendant Mount Adapter

RHBPMJB34 – 3/4" Pendant Mount Adapter with Junction

RHBSSENSOR1 – Wet Location Rated Daylight Harvesting Occupancy Sensor 120V/277V

RHBSREM1 – Optional Infrared Remote Controller For Programming RHBSSENSOR1

RHBBRKT – Adjustable Bracket

HBRALUM90 – 90° Aluminum Reflector

HBRACREFL – Acrylic Refractor

HBRACLENS – Acrylic Lens For HBRACREFL

HBRHWG – Wireguard Over High Bay Fixture Lens. Not Compatible With HBRACREFL Or HBRALUM90

BILDAIP65EM30 – 30W IP65 Wet Location Rated Title 20 Backup Battery

# Select Series LED UFO High Bay



TCP's easy-to-install Select Series LED UFO High Bay Luminaires have a sleek, robust design to meet a variety of application needs. Combining long-life and outstanding efficacy up to 165 LPW, TCP offers a cost-effective solution to maximize energy and maintenance savings. These LED luminaires instantly deliver brilliant white light, eliminating long warm up times experienced with HID fixtures.

## Features & Benefits

- Energy-efficient design delivers up to 165 LPW and uses less energy than HID alternatives
- Smooth, uniform 0-10V dimming
- Instant on
- Long-life: 50,000 hours
- Heavy duty die-cast aluminum housing
- IP65 wet location rated
- Standard hanging hook and optional pendant mount adapter available for easy installation
- Mercury-free and environmentally friendly
- Battery backup is Title 20 Compliant
- IK10 rating eliminates the need for a wire guard

## Catalog Ordering Matrix

| FAMILY                                          | VOLTAGE                                                                 | DIMMING                   | LUMEN PACKAGE <sup>1,2,5</sup>                                                                                                                                                       | CCT                                          | OPTIONS   |
|-------------------------------------------------|-------------------------------------------------------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|-----------|
| <b>SELECTABLE WATTAGE WITH SELECTABLE COLOR</b> |                                                                         |                           |                                                                                                                                                                                      |                                              |           |
| <b>UFO</b> – Select Series UFO High Bay         | <b>U</b> – 120V-277V<br><b>H</b> – 347V/480V<br>(step down transformer) | <b>ZD</b> – 0-10V Dimming | <b>SW3</b> – 13,200/16,500/24,750L<br>(80/120/150W)<br><b>SW6</b> – 24,750/33,000/39,600L<br>(155/200/240W)                                                                          | <b>CCT</b> – 3000K/4000K/5000K<br>Selectable | See Below |
| <b>SINGLE WATTAGE WITH SELECTABLE COLOR</b>     |                                                                         |                           |                                                                                                                                                                                      |                                              |           |
| <b>UFO</b> – Select Series UFO High Bay         | <b>U</b> – 120V-277V<br><b>H</b> – 347V/480V<br>(step down transformer) | <b>ZD</b> – 0-10V Dimming | <b>240</b> – 39,600L (240W)<br><b>200</b> – 33,000L (200W)<br><b>155</b> – 25,500L (155W)<br><b>150</b> – 24,750L (150W)<br><b>120</b> – 19,800L (120W)<br><b>80</b> – 13,200L (80W) | <b>CCT</b> – 3000K/4000K/5000K<br>Selectable | See Below |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

- UFOBRKT** – Adjustable Bracket
- UFOPMJB34** – 3/4" Pendant Mount Junction Box
- BILDAIP65EM30** – 30W IP65 Wet Location Rated Title 20 Backup Battery
- HM1** – Haisen 12V 0-10V Dimming Microwave Sensor
- HP1** – Haisen 12V 0-10V Dimming Passive Infrared Sensor
- HREMOTE<sup>4</sup>** – Remote for HM1 and HP1

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>3</sup> Black color is standard. Other colors are special order only, extended lead times will apply. 100 pieces minimum order quantity for special color orders.

<sup>4</sup> Only one remote needed per job.

<sup>5</sup> 80 and 120W single wattage models match the SW3 dimensions, 150 and 200W single wattage models match the SW6 dimensions.



# Economy UFO High Bay

TCP's easy-to-install Economy LED UFO High Bay Luminaires have a sleek, robust design that meets a variety of application needs. This is the perfect high bay solution for projects that require quality and performance on a tight budget.



## Features & Benefits

- Energy efficient design delivers up to 145 LPW
- Smooth, uniform 0-10V dimming
- Instant on
- Long-life: 50,000 hours
- Heavy duty die-cast aluminum housing
- IP65 wet location rated

## Catalog Ordering Matrix

| FAMILY                      | VOLTAGE      | CONTROLS           | LUMEN PACKAGE <sup>1</sup> | WATTAGE <sup>2</sup> | CCT                          | OPTIONS   |
|-----------------------------|--------------|--------------------|----------------------------|----------------------|------------------------------|-----------|
| EUFO – Economy UFO High Bay | U – 120-277V | ZD – 0-10V Dimming | 16,750L                    | 115W                 | CCT – 4000K/5000K Selectable | See Below |
|                             |              |                    | SW4 – 23,200L              | 160W                 |                              |           |
|                             |              |                    | 30,500L                    | 200W                 |                              |           |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

EUFOMS1 – Microwave Sensor

ISREMOTE – Remote to control the EUFOMS1

EUFODRVSW4 – Replacement Driver for SW4 Lumen Package

<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end use application.

<sup>2</sup> Actual wattage may differ by +/- 10%.

# DT Series Flat Panels



TCP's LED Direct Troffer Luminaires feature backlit technology with a robust construction that still offers a slim, low-profile with beautiful full-panel diffusion and superior uniformity.

## Features & Benefits

- Superior energy efficiency compared to fluorescent alternatives, providing instant energy savings and potential rebate ability
- Excellent color consistency and high CRI enhance color of focal point while maintaining uniformity throughout lighting installation
- Mercury-free construction is great for all environments
- Utilizes backlit technology for full diffusion with excellent uniformity
- Slim, low-profile design and lightweight for easy handling

## Catalog Ordering Matrix

| FAMILY              | LENS        | SIZE      | VOLTAGE      | DIMMING            | WATTAGE <sup>1,2</sup>                                                                                       | CCT                                                                                                              | OPTIONS   |
|---------------------|-------------|-----------|--------------|--------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-----------|
| DT – Direct Troffer | F – Frosted | 1 – 1'x4' | U – 120-277V | ZD – 0-10V Dimming | 23 – 2600 Lumens<br>29 – 3200 Lumens<br>38 – 4200 Lumens<br>(Wattage selectable to 38W/29W/23W) <sup>3</sup> | 27K – 2700K <sup>5</sup><br>30K – 3000K<br>35K – 3500K<br>41K – 4100K<br>50K – 5000K<br>65K – 6500K <sup>5</sup> | See Below |
|                     |             | 2 – 2'x2' |              |                    | 23 – 2600 Lumens<br>29 – 3200 Lumens<br>38 – 4200 Lumens<br>(Wattage selectable to 38W/29W/23W) <sup>3</sup> | CCT – 3500K/4100K/5000K Selectable                                                                               |           |
|                     |             | 4 – 2'x4' |              |                    | 29 – 3300 Lumens<br>39 – 4400 Lumens<br>46 – 5100 Lumens<br>(Wattage selectable to 46W/39W/29W) <sup>4</sup> |                                                                                                                  |           |

### Factory Installed Options (add to end of catalog number)

- EB – Battery Backup
- CP – Chicago Plenum

### Frame Options (add to end of catalog number)

- Blank – White Frame
- BLK – Black Frame

### Control Options (add to end of catalog number)

- SM – SmartBox
- SBS – SmartBox with Sensor

### Field Installed Accessories

- YHANGER6PK – Y Fit Cable Hanger 6 Pack (Hangs 3 units)
- DTSK1 – Surface Mount Kit for 1x4 Panels
- DTFLK1 – Recess Mount Flange Kit for 1x4 Panels
- DTSK2 – Surface Mount Kit for 2x2 Panels
- DTFLK2 – Recess Mount Flange Kit for 2x2 Panels
- DTSK4 – Surface Mount Kit for 2x4 Panels
- DTFLK4 – Recess Mount Flange Kit for 2x4 Panels

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>3</sup> 38W unit is wattage selectable: 38/29/23W.

<sup>4</sup> 46W unit is wattage selectable: 46/39/29W.

<sup>5</sup> 2700K and 6500K are special order items. Contact your TCP Representative for lead times.

# HDT Series Premium Flat Panels

TCP's LED Premium Direct Troffer Luminaires feature backlit technology with a robust construction that still offers a slim, low-profile with beautiful full-panel diffusion and superior uniformity.



## Features & Benefits

- Superior energy efficiency compared to fluorescent alternatives, providing instant energy savings and potential rebate ability
- Excellent color consistency and high CRI enhance color of focal point while maintaining uniformity throughout lighting installation
- Mercury-free construction is great for all environments
- Utilizes backlit technology for full diffusion with excellent uniformity
- Slim, low-profile design and lightweight for easy handling



## Catalog Ordering Matrix

| FAMILY               | LENS TYPE   | SIZE      | VOLTAGE      | CONTROLS           | WATTAGE <sup>1,2</sup> | CCT                                                                   | OPTIONS   |
|----------------------|-------------|-----------|--------------|--------------------|------------------------|-----------------------------------------------------------------------|-----------|
| HDT – Direct Troffer | F – Frosted | 1 – 1'x4' | U – 120-277V | ZD – 0-10V Dimming | 23 – 2900 Lumens       | 27K – 2700K <sup>4</sup>                                              | See Below |
|                      |             | 2 – 2'x2' | H – 347-480V |                    | 29 – 3650 Lumens       | 30K – 3000K                                                           |           |
|                      |             | 4 – 2'x4' |              |                    | 38 – 4800 Lumens       | 35K – 3500K<br>41K – 4100K<br>50K – 5000K<br>65K – 6500K <sup>4</sup> |           |

### Factory Installed Options (add to end of catalog number)

- EB – Battery Backup<sup>3</sup>
- CP – Chicago Plenum

### Frame Options (add to end of catalog number)

- Blank – White Frame
- BLK – Black Frame

### Field Installed Accessories

- YHANGER6PK – Y Fit Cable Hanger 6 Pack (Hangs 2 units)
- DTSK1 – Surface Mount Kit for 1'x4' Panels
- DTFK1 – Recess Mount Flange Kit for 1'x4' Panels
- DTSK2 – Surface Mount Kit for 2'x2' Panels
- DTFK2 – Recess Mount Flange Kit for 2'x2' Panels
- DTSK4 – Surface Mount Kit for 2'x4' Panels
- DTFK4 – Recess Mount Flange Kit for 2'x4' Panels


<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end use application.

<sup>2</sup> Actual wattage may differ by +/- 10%.

<sup>3</sup> ILBCP07ATBTS – 7W battery backup, Title 20 compliant.

<sup>4</sup> 2700K and 6500K are special order items. Contact your TCP Representative for lead times.

# Accents Panel Artistic Lenses

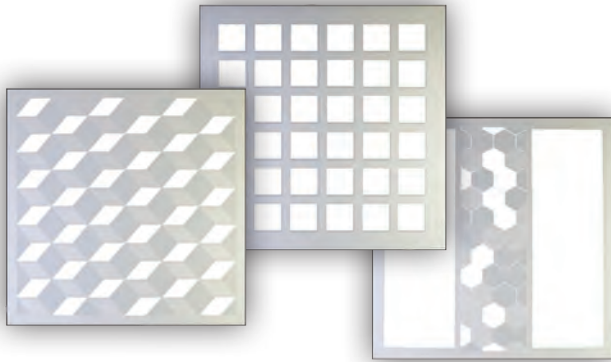

TCP's Accents Panel Artistic Lens is a simple, hassle-free way to add a layer of elegance to any space. Order Accents panel lenses for new lighting opportunities or use the Accents panel art to retrofit flat panels that are already installed. Transform a boring ceiling into a work of art!

## Features & Benefits

- Wide variety of designs
- Easily and quickly secured in place with metal clips
- Custom design options available

## Catalog Ordering Matrix

| FAMILY                  | SIZE      | DESIGN                                                                                                                                                                                                    | OPTIONS   |
|-------------------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| APA – Accents Panel Art | 2 – 2'x2' | TL – 3D Volumetric Lens<br>CBL – Checkerboard Lens<br>CL – Circle Lens<br>DTL – Deco Troffer Lens<br>OSL – Offset Square Lens<br>SO – Square Outline Lens<br>HCL – Honeycomb Lens<br>BPL – Parabolic Lens | See Below |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

APACLIP – Set of 6 clips and screws



# Select Series General Purpose Strips

TCP's Select Series LED General Purpose Strip Luminaires are designed to efficiently deliver robust performance while maximizing savings. These wattage and color selectable LED luminaires significantly reduce energy consumption compared to fluorescent systems, providing instant energy savings and potential utility rebates where available.



## Features & Benefits

- Wattage and color selectable
- Uses up to 58% less energy than traditional fluorescent systems for instant energy savings and potential rebate eligibility
- 50,000 hour rated life minimizes replacements and labor costs
- 0-10V dimming driver comes standard for smooth, continuous dimming
- Excellent color consistency and CRI enhance focal point color while maintaining uniformity throughout lighting installation
- Surface mount, suspended or pendant installation options make it easy to install in both new and retrofit applications

## Catalog Ordering Matrix

| FAMILY                                          | SIZE                    | VOLTAGE       | CONTROLS           | LUMEN PACKAGE (POWER) <sup>1,2</sup>                                     | WATTAGE                             | CCT                                | OPTIONS   |
|-------------------------------------------------|-------------------------|---------------|--------------------|--------------------------------------------------------------------------|-------------------------------------|------------------------------------|-----------|
| <b>SELECTABLE WATTAGE WITH SELECTABLE COLOR</b> |                         |               |                    |                                                                          |                                     |                                    |           |
| GPS – General Purpose Strip                     | 2 – 2 Foot              | U – 120-277V  | ZD – 0-10V Dimming | SW2 – 2500/2900/4200L                                                    | 18/22/32W                           | CCT – 3500K/4000K/5000K Selectable | See Below |
|                                                 | 4 – 4 Foot              |               |                    | SW2 – 2500/2900/4200L<br>SW4 – 4200/5200/6000L                           | 18/22/32W<br>32/40/46W              |                                    |           |
|                                                 | 8 – 8 Foot <sup>3</sup> |               |                    | SW2 – 4200/5200/6000L<br>SW4 – 8500/9800/11000L<br>SW5 – 6000/7200/8500L | 32/40/46W<br>65/75/85W<br>45/55/65W |                                    |           |
| <b>SINGLE WATTAGE WITH SELECTABLE COLOR</b>     |                         |               |                    |                                                                          |                                     |                                    |           |
| GPS – General Purpose Strip                     | 2 – 2 Foot              | U – 120V-277V | ZD – 0-10V Dimming | 18– 2500L                                                                | 18W                                 | CCT – 3500K/4000K/5000K Selectable | See Below |
|                                                 |                         |               |                    | 25– 3300L                                                                | 25W                                 |                                    |           |
|                                                 | 4 – 4 Foot              |               |                    | 18– 2500L                                                                | 18W                                 |                                    |           |
|                                                 |                         |               |                    | 25– 3300L                                                                | 25W                                 |                                    |           |
|                                                 |                         |               |                    | 32– 4200L                                                                | 32W                                 |                                    |           |
|                                                 | 8 – 8 Foot <sup>3</sup> |               |                    | 40– 5200L                                                                | 40W                                 |                                    |           |
|                                                 |                         |               |                    | 32– 4200L                                                                | 32W                                 |                                    |           |
| 40– 5200L                                       |                         | 40W           |                    |                                                                          |                                     |                                    |           |
|                                                 | 45– 6000L               | 45W           |                    |                                                                          |                                     |                                    |           |
|                                                 | 55– 7000L               | 55W           |                    |                                                                          |                                     |                                    |           |
|                                                 | 65– 8500L               | 65W           |                    |                                                                          |                                     |                                    |           |
|                                                 | 75– 9800L               | 75W           |                    |                                                                          |                                     |                                    |           |

### Factory Installed Options (add to end of catalog number)

**BLANK** – No Controls

**EB** – Battery Backup

### Factory Installed Control Options (add to end of catalog number)

**BLANK** – No Controls

**LS1** – PIR Motion Sensor

**LS1D** – PIR/ Daylight Sensor

**IS** – Integrated Sensor

**SM** – SmartBox

### Field Installed Accessories

**TCPGPS4LENS** – GP Strip and Retrofit Lens 4FT Section (8ft uses 2 lenses)

**LS1** – Leviton PIR Occupancy Sensor w/bracket and interchangeable lenses, 40' or less, 120V, 277V or 347V

**LS1D** – Leviton PIR Occupancy Sensor w/Daylight Harvesting, 40' or less, 120V, 277V or 347V

**GPSENDCON** – Connector to join General Purpose Strips end-to-end

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>3</sup> 8FT requires two (2) TCGPS4LENS.

Industra  
by TCP



The TCP Wrap Light offers superior light output in a maintenance-free fixture. With a durable metal frame, and a glare free, impact-resistant frosted lens, you can install these fixtures and relax. Built to industry standard measurements, installation is quick and easy, and provides for easy upgrading.

## Features & Benefits

- Energy efficient LED luminaire
- Smooth, uniform dimming (0-10V)
- Instant on, no warm up time for full light
- Long-life: 50,000 hours
- Replaces traditional linear fluorescent systems
- Heavy duty steel housing

## Catalog Ordering Matrix

| FAMILY               | WATTAGE <sup>1,2</sup>                          | VOLTAGE        | CCT                                       | OPTIONS   |
|----------------------|-------------------------------------------------|----------------|-------------------------------------------|-----------|
| LWR - LED Wrap Light | 23 - 23 Watts<br>35 - 35 Watts<br>63 - 63 Watts | 001 - 120-277V | 35K - 3500K<br>41K - 4100K<br>50K - 5000K | See Below |

### Factory Installed Options (add to end of catalog number)

**MS1** - Microwave Motion Sensor 120-277V

**LS1** - PIR Motion Sensor 120-277V, or 347V

**LS1D** - PIR Motion/Daylight Harvest Sensor 120-277V, or 347V

### Field Installed Accessories

**NA** - Not Available

<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end use application.

<sup>2</sup> Actual wattage may differ by +/- 10%.

# Select Series LED Vapor Tight

The TCP Select Series LED Vapor Tight Luminaire is perfect for your wet location low bay needs. Providing ample light at a low energy cost, the Vapor Tight is ready for the worst weather. With a plastic housing and included mounting hardware, the TCP Select Series LED Vapor Tight is durable and quick to install.



## Features & Benefits

- Durable plastic housing
- Frosted PC lens for glare control
- Wet location rated
- Long-life: 50,000 hours
- Operating temperature: -4°F to 122°F
- Wide beam spread

## Catalog Ordering Matrix

| FAMILY                                          | SIZE       | VOLTAGE       | CONTROLS           | LUMEN PACKAGE (POWER) <sup>1,2</sup>                               | WATTAGE                         | CCT                                | OPTIONS   |
|-------------------------------------------------|------------|---------------|--------------------|--------------------------------------------------------------------|---------------------------------|------------------------------------|-----------|
| <b>SELECTABLE WATTAGE WITH SELECTABLE COLOR</b> |            |               |                    |                                                                    |                                 |                                    |           |
| VTF – Vapor Tight Fixture                       | 2 – 2 Foot | U – 120-277V  | ZD – 0-10V Dimming | SW2 – 2500/3000/4200L                                              | 18/22/32W                       | CCT – 3500K/4000K/5000K Selectable | See Below |
|                                                 | 4 – 4 Foot |               |                    | SW2 – 2500/3000/4200L<br>SW4 – 4200/5200/6000L                     | 18/22/32W<br>32/40/46W          |                                    |           |
|                                                 | 8 – 8 Foot |               |                    | SW2 – 4200/5200/6000L<br>SW5 – 6000/7200/8500L                     | 32/40/46W<br>45/55/65W          |                                    |           |
| <b>SINGLE WATTAGE WITH SELECTABLE COLOR</b>     |            |               |                    |                                                                    |                                 |                                    |           |
| VTF – Vapor Tight Fixture                       | 2 – 2 Foot | U – 120V-277V | ZD – 0-10V Dimming | 18 – 2500L<br>25 – 3000L                                           | 18W<br>25W                      | CCT – 3500K/4000K/5000K Selectable | See Below |
|                                                 | 4 – 4 Foot |               |                    | 18 – 2500L<br>25 – 3000L<br>32 – 4200L<br>40 – 5200L               | 18W<br>25W<br>32W<br>40W        |                                    |           |
|                                                 | 8 – 8 Foot |               |                    | 32 – 4200L<br>40 – 5200L<br>45 – 6000L<br>55 – 7200L<br>65 – 8500L | 32W<br>40W<br>45W<br>55W<br>65W |                                    |           |

### Factory Installed Options (add to end of catalog number)

**BLANK** – No Controls

**EB** – Battery Backup

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

### Field Installed Accessories

**BLANK** – No Controls

**LS1** – PIR Motion Sensor

**LS1D** – PIR/Daylight Sensor

**IS** – Integrated Sensor

**SM** – SmartBox Microwave Sensor

# Volumetric Troffers

Luxterior  
by TCP



TCP's LED Volumetric Troffers offer a high-efficiency alternative to T5, T8, and T12 linear fluorescent systems. They provide long-life with consistent color and superior lumen maintenance. Designed to mount in a variety of grid ceilings, the rugged, cold-rolled steel housing is post-painted with a matte white finish.

## Features & Benefits

- Uses up to 61% less energy than fluorescent alternatives
- Long 50,000 hour rated life
- Excellent color consistency and CRI
- Fits standard 1" and 9/16" T-bar grid ceilings
- Acrylic diffuser with sloped housing design
- Slim, low-profile design
- Mercury-free

## Catalog Ordering Matrix

| FAMILY                   | SIZE                                                              | VOLTAGE      | CONTROLS           | WATTAGE <sup>1,2</sup>                                            | CCT                                                                                               | OPTIONS   |
|--------------------------|-------------------------------------------------------------------|--------------|--------------------|-------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------|
| TRV – Volumetric Troffer | 1 – 1'x4'                                                         | U – 120-277V | ZD – 0-10V Dimming | 23 – 3000 Lumens                                                  | 30K – 3000K<br>35K – 3500K<br>41K – 4100K<br>50K – 5000K<br>CCT – 3500K/4100K/5000K<br>Selectable | See Below |
|                          | 29 – 3800 Lumens                                                  |              |                    |                                                                   |                                                                                                   |           |
|                          | 38 – 5000 Lumens (Wattage Selectable to 38W/29W/23W) <sup>3</sup> |              |                    |                                                                   |                                                                                                   |           |
|                          | 2 – 2'x2'                                                         |              |                    | 23 – 3100 Lumens                                                  |                                                                                                   |           |
|                          |                                                                   |              |                    | 29 – 4000 Lumens                                                  |                                                                                                   |           |
|                          |                                                                   |              |                    | 38 – 5200 Lumens (Wattage Selectable to 38W/29W/23W) <sup>3</sup> |                                                                                                   |           |
|                          | 4 – 2'x4'                                                         |              |                    | 23 – 3100 Lumens                                                  |                                                                                                   |           |
|                          |                                                                   |              |                    | 29 – 4000 Lumens                                                  |                                                                                                   |           |
|                          |                                                                   |              |                    | 38 – 5200 Lumens (Wattage Selectable to 38W/29W/23W) <sup>3</sup> |                                                                                                   |           |
|                          |                                                                   |              |                    | 39 – 5300 Lumens                                                  |                                                                                                   |           |
|                          |                                                                   |              |                    | 46 – 6000 Lumens (Wattage Selectable to 46W/39W/23W) <sup>4</sup> |                                                                                                   |           |

### Factory Installed Options (add to end of catalog number)

EB – Battery Backup

### Field Installed Accessories

YHANGER6PK – Y Fit Cable Hanger 6 Pack (Hangs 2 units)

DRVEXTCABLE – 3FT Driver Extension Cable

DTFLK1 – Recess Mount Flange Kit for 1x4 Troffers and Panels

DTFLK2 – Recess Mount Flange Kit for 2x2 Troffers and Panels

DTFLK4 – Recess Mount Flange Kit for 2x4 Troffers and Panels

<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>2</sup> Actual wattage may differ by +/- 10%.

<sup>3</sup> 23W and 29W are permanently fixed; 38W is adjustable to 38W, 29W, or 23W.

<sup>4</sup> 46W is adjustable to 46W, 39W, or 23W.

# Troffer Retrofit Kits

TCP's LED Troffer Retrofit Kits offer a high-efficiency alternative to T5, T8 and T12 linear fluorescent systems. They provide long-life with consistent color and superior lumen maintenance. Designed to mount in a variety of grid ceilings, the rugged, cold-rolled steel housing is post-painted with a matte finish.

Luxterior  
by TCP



**Volumetric Troffers**



**Flat Panel Troffers**

## Features & Benefits

- Uses up to 61% less energy than fluorescent alternatives
- Available in Volumetric Troffer and Flat Panel designs
- Long 50,000 hour rated life
- Excellent color consistency and CRI
- Mercury free
- Fits standard 1" and 9/16" T-bar grid ceilings
- Acrylic diffuser with sloped housing design
- Slim, low-profile construction

## Catalog Ordering Matrixes

| FAMILY                        | SIZE                                | VOLTAGE      | CONTROLS           | WATTAGE <sup>1,2</sup>         | CCT                                   | OPTIONS   |
|-------------------------------|-------------------------------------|--------------|--------------------|--------------------------------|---------------------------------------|-----------|
| VRK – Volumetric Retrofit Kit | 1 – 1'x4'<br>2 – 2'x2'<br>4 – 2'x4' | U – 120-277V | ZD – 0-10V Dimming | A1 – 38W/29W/23W<br>Selectable | CCT – 3500K/4100K/5000K<br>Selectable | See Below |

| FAMILY                        | SIZE                   | VOLTAGE      | CONTROLS           | WATTAGE <sup>1,2</sup>                                           | CCT                                   | OPTIONS   |
|-------------------------------|------------------------|--------------|--------------------|------------------------------------------------------------------|---------------------------------------|-----------|
| FRK – Flat Panel Retrofit Kit | 2 – 2'x2'<br>4 – 2'x4' | U – 120-277V | ZD – 0-10V Dimming | A1 – 38W/29W/23W<br>Selectable<br>A2 – 46W/39W/29W<br>Selectable | CCT – 3500K/4100K/5000K<br>Selectable | See Below |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

NA – Not Available

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

# Select Series General Purpose Strip Retrofit Kit



TCP's Select Series General Purpose Strip Retrofit Kits are designed to easily replace the fluorescent lamps and ballast in an existing fluorescent strip fixture with an integrated LED lighting solution. The universal design fits most 4.25" and 5.25" wide T8/T12 fluorescent strips.

## Features & Benefits

- Uses up to 58% less energy than traditional fluorescent systems for instant energy savings and potential rebate eligibility
- 50,000 hour rated life minimizes replacements and labor costs
- 0-10V dimming driver comes standard for smooth, continuous dimming
- Excellent color consistency and CRI enhance color of focal point while maintaining uniformity throughout a lighting installation
- Mercury-free construction is great for all environments
- Surface mount, suspended or pendant installation options makes it easy to install in both new and retrofit applications

## Catalog Ordering Matrix

| FAMILY                                                 | SIZE       | VOLTAGE      | CONTROLS           | LUMEN PACKAGE (POWER) <sup>1,2</sup> | CCT                                | OPTIONS   |
|--------------------------------------------------------|------------|--------------|--------------------|--------------------------------------|------------------------------------|-----------|
| GPR – Select Series General Purpose Strip Retrofit Kit | 4 – 4 Foot | U – 120-277V | ZD – 0-10V Dimming | SW2 – 18/22/32W (2500/2900/4200L)    | CCT – 3500K/4000K/5000K Selectable | See Below |
|                                                        |            |              |                    | SW4 – 32/40/46W (4200/5200/6000L)    |                                    |           |
|                                                        | 8 – 8 Foot |              |                    | SW2 – 32/40/46W (4200/5200/6000L)    |                                    |           |
|                                                        |            |              |                    | SW4 – 65/75/85W (8500/9800/11000L)   |                                    |           |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

NA – Not Available

<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>2</sup> Actual wattage may differ by +/- 10%.



# Outdoor LED Luminaires

TCP's line of Outdoor LED Luminaires include several varieties of wall packs, area, canopy and flood lighting, barn lights and security lighting. All are wet location rated and perfect for a variety of different applications.



## In this section:

|                                        |           |
|----------------------------------------|-----------|
| Select Series Canopy Light.....        | <b>22</b> |
| Elements LED Canopy Light.....         | <b>23</b> |
| Select Series Slim Wall Pack.....      | <b>24</b> |
| Select Series Wall Pack.....           | <b>25</b> |
| Elements LED Wall Pack.....            | <b>26</b> |
| Elements LED Adjustable Wall Pack..... | <b>27</b> |
| Elements LED Area Light.....           | <b>28</b> |
| Elements LED Sports Light.....         | <b>29</b> |
| Select Series Flood Light.....         | <b>30</b> |
| Elements LED Flood Light.....          | <b>31</b> |
| LED Barn Light.....                    | <b>32</b> |
| LED Security Light.....                | <b>33</b> |

# Select Series Canopy Light

The Select Series LED Canopy Lights are long-lasting canopy luminaires that are virtually maintenance free over their long 50,000 hour rated life. TCP's next generation of canopy light is wattage selectable, sealed against water/dust, and vandal proof.



## Features & Benefits

- Wide, even light distribution and low glare
- 0-10V dimming, dim-to-off
- Vandal resistant - IK10 Protection
- Cast aluminum housing
- IP65 wet location rated
- Wattage selectable
- Long 50,000 hour rated life reduces maintenance and replacement costs
- Optional microwave motion sensor has motion sensing, a photocell, and bi-level dimming

## Catalog Ordering Matrix

| FAMILY            | VOLTAGE      | CONTROLS           | LUMEN PACKAGE <sup>1,2</sup>                       | CCT                        | BEAM ANGLE<br>(DLC PRIMARY USE) <sup>3</sup>           | Paint Color <sup>4</sup>                   | Options   |
|-------------------|--------------|--------------------|----------------------------------------------------|----------------------------|--------------------------------------------------------|--------------------------------------------|-----------|
| CP – Canopy Light | U – 120-277V | ZD – 0-10V Dimming | B3 – 3,200L/5,120L/7,680L (25W/40W/60W selectable) | 40K – 4000K<br>50K – 5000K | Blank – 120° (Gas Pump)<br>160 – 160° (Parking Garage) | Blank – White<br>BR – Bronze<br>BK – Black | See Below |

### Factory Installed Options (add to end of catalog number)

MIS – Microwave Motion/Bi-level Dimming Sensor

### Field Installed Accessories

CPEBATTERY – 8W 90 min. waterproof emergency battery backup

CPREMOTE – Remote control for microwave sensor add-on

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.


<sup>3</sup> 160° beam angle optic needed for parking garage. DLC primary use is clear.

<sup>4</sup> White paint is standard. All other colors are special order, longer lead times apply.



# Elements LED Canopy Light

Elements  
by TCP

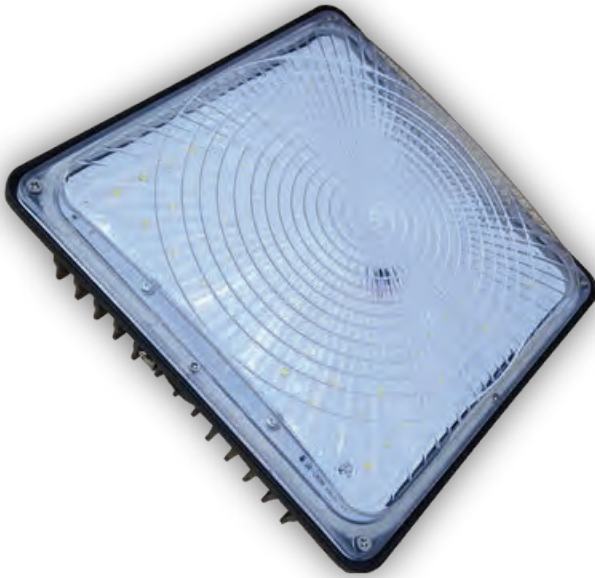

Are you looking for a low-maintenance solution to your parking garage, awning or outdoor canopy lighting? Check out the LED Canopy Lights. These long-lasting canopy luminaires are virtually maintenance free over their long 50,000 hour rated lifespan. They are sealed against water and dust intrusion, providing protection from the elements for the lifespan of the fixture.

## Features & Benefits

- Delivers bright light evenly and uniformly
- Energy efficient – up to 70% more energy efficient than equivalent HID
- Long lasting – 50,000 hour rated life
- Heavy-duty, cast aluminum housing with a durable powder coat finish
- Mounts directly to junction box

## Catalog Ordering Matrix

| FAMILY            | LUMEN PACKAGE (POWER) <sup>1,2</sup>   | VOLTAGE        | CCT                        | Options   |
|-------------------|----------------------------------------|----------------|----------------------------|-----------|
| CP – Canopy Light | 45 – 5,350L (45W)<br>70 – 7,600L (70W) | 001 – 120-227V | 40K – 4000K<br>50K – 5000K | See Below |

### Factory Installed Options (add to end of catalog number)

PC – Photocell

### Field Installed Accessories

NA – Not Available

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.



# Select Series Slim Wall Pack



TCP's Select Series LED Slim Wall Pack provides the familiar lighting of a traditional wall pack, but in a slim form factor. The slim design provides outstanding efficacy of over 130 LPW while maintaining a smaller footprint than traditional wall packs. Utilize these unobstructive fixtures on building perimeters, entrances, exits or for general security lighting.



## Features & Benefits

- Delivers bright, white light with excellent uniformity
- IP65 wet location rated for outdoor use
- Color temperature and wattage selectable
- Durable construction with die-cast aluminum housing and impact-resistant glass lens
- Integrated photocell maximizes energy efficiency

## Catalog Ordering Matrix

| FAMILY               | VOLTAGE      | CONTROLS           | LUMEN PACKAGE <sup>1</sup> | WATTAGE <sup>2</sup> | CCT                                | Options   |
|----------------------|--------------|--------------------|----------------------------|----------------------|------------------------------------|-----------|
| SWP – Slim Wall Pack | U – 120-277V | ZD – 0-10V Dimming | 4200L                      | 30W                  | CCT – 3000K/4000K/5000K Selectable | See Below |
|                      |              |                    | SW5 – 5600L<br>7800L       | 40W<br>60W           |                                    |           |
|                      |              |                    | 7800L                      | 60W                  |                                    |           |
|                      |              |                    | SW8 – 11,200L<br>13,000L   | 80W<br>100W          |                                    |           |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

NA – Not Available

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.




# Select Series Wall Pack




TCP's Select Series LED Wall Pack combines the look of a traditional wall pack with industry-defining selectable features. This energy-saving HID alternative empowers you to select both wattage and correlated color temperature all while delivering bright, uniform light.

## Features & Benefits

- Delivers bright, white light with excellent uniformity
- Wet location rated for safe outdoor usage
- Durable construction with die-cast aluminum housing and impact-resistant polycarbonate lens
- CCT and wattage selectable



Integrated 90 degree lens reduces uplight concerns

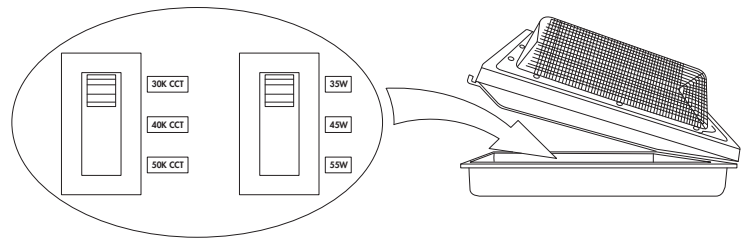

## Catalog Ordering Matrix

| FAMILY                      | VOLTAGE                      | CONTROLS           | LUMEN PACKAGE (POWER) <sup>1,2</sup>                       | CCT                                | Options   |
|-----------------------------|------------------------------|--------------------|------------------------------------------------------------|------------------------------------|-----------|
| TWP – Traditional Wall Pack | U – 120-277V<br>H – 347/480V | ZD – 0-10V Dimming | B1 – 4,725/6,075/7,425L (35/45/55W)<br>B2 – 15,525L (115W) | CCT – 2950K/4000K/5000K Selectable | See Below |

### Factory Installed Options (add to end of catalog number)

PC – Photocell

### Field Installed Accessories

CPEBATTERY – 8W 90 min. waterproof emergency backup

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.



# Elements LED Wall Pack

TCP's non-cutoff LED Wall Pack combines the look of a traditional wall pack with the benefits of LED. An efficient alternative to HID, these wall packs deliver bright, uniform light while providing energy savings. A long 50,000 hour rated life significantly decreases maintenance labor and material costs over the life of the fixture.

Elements  
by TCP



## Features & Benefits

- Energy efficient – Uses less energy than traditional fixtures, resulting in instant energy savings
- Long 50,000 hour rated life minimizes replacements and reduces overall labor costs throughout the life of the fixture
- UL approved for wet locations
- Durable die-cast aluminum housing with impact-resistant polycarbonate lens protects the LED in harsh environments

## Catalog Ordering Matrix

| FAMILY         | LUMEN PACKAGE (POWER) <sup>1,2</sup>    | VOLTAGE        | CCT                        | Options   |
|----------------|-----------------------------------------|----------------|----------------------------|-----------|
| WP – Wall Pack | 55 – 5800L (55W)<br>120 – 12600L (120W) | 001 – 120-277V | 40K – 4000K<br>50K – 5000K | See Below |

### Factory Installed Options (add to end of catalog number)

PC – Button Photocell

MS – Microwave Bi-level Dimming Sensor

### Field Installed Accessories

CPEBATTERY – 8W 90 min. waterproof emergency battery backup

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

# Elements LED Adjustable Wall Pack

Elements  
by TCP



TCP's LED Adjustable Wall Packs combine the look of a modern LED wall pack with the added benefit of adjustability up to 20° to add forward throw when needed. An efficient alternative to metal halide, these wall packs deliver bright, uniform light while providing energy savings and potential rebate eligibility. A long 50,000 hour rated life significantly decreases maintenance labor and material costs over the life of the fixture.

## Features & Benefits

- Delivers bright light evenly and uniformly
- Energy efficient – up to 70% more energy efficient than equivalent HID
- Long lasting – 50,000 hour rated life
- Heavy-duty, cast aluminum housing with a durable powder coat finish
- Mounts directly to junction box

## Catalog Ordering Matrix

| FAMILY           | MOUNT    | VOLTAGE      | DIMMING            | LUMEN PACKAGE (POWER) <sup>1,2</sup> | DISTRIBUTION  | CCT                        | COLOR       | Options   |
|------------------|----------|--------------|--------------------|--------------------------------------|---------------|----------------------------|-------------|-----------|
| BNL – Barn Light | W – Wall | U – 120V-277 | ZD – 0-10V Dimming | A2 = 9500 Lumens (90W)               | T3 – Type III | 40K – 4000K<br>50K – 5000K | BR – Bronze | See Below |

### Factory Installed Options (add to end of catalog number)

PC – Button Photocell

### Field Installed Accessories

NA – Not Available

<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>2</sup> Actual wattage may vary by +/- 10%.



# Elements LED Area Light

TCP's LED Area Light features a modern, lightweight design with tool-less driver compartment clips resulting in an easier and faster installation. The durable, 3G tested luminaire construction provides bright, uniform light while maintaining a zero uplight BUG rating, allowing for Dark Sky Conformance.


Elements  
by TCP



## Features & Benefits

- Uses up to 72% less energy than traditional HID
- Long 50,000 hour rated life minimizes replacement and labor costs
- Factory installed 3-pin or 7-pin NEMA photocontrol receptacle options available
- Easy-to-install mounting accessories available for various mounting options
- Mercury-free construction is great for all environments
- IP65 Rated – suitable for outdoor installation
- Lightweight and low Effective Projected Area (EPA) reduces stress on existing poles
- Dark Sky Conformance: Full cutoff fixture results in zero uplight emission
- Tool-free access to electrical compartment for easy field maintenance

## Factory Installed Optic Distribution Flexibility

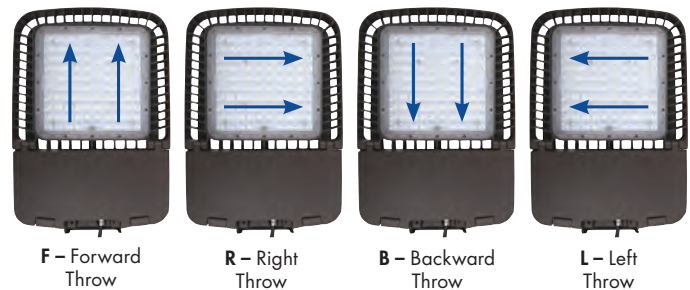

## Catalog Ordering Matrix

| FAMILY               | VOLTAGE                      | DIMMING            | LUMEN PACKAGE (POWER) <sup>1,2</sup>                                                     | DISTRIBUTION                                 | THROW                                                | CCT <sup>4</sup>                          | PHOTOCELL RECEPTACLE                                  | Paint Color <sup>5</sup>                | Options   |
|----------------------|------------------------------|--------------------|------------------------------------------------------------------------------------------|----------------------------------------------|------------------------------------------------------|-------------------------------------------|-------------------------------------------------------|-----------------------------------------|-----------|
| TAL – TCP Area Light | U – 120-277V<br>H – 277-480V | ZD – 0-10V Dimming | A2 – 14,000L (100W)<br>A3 – 19,500L (150W)<br>A4 – 27,500L (200W)<br>A5 – 37,500L (300W) | T3 – Type III<br>T4 – Type IV<br>T5 – Type V | F – Forward<br>L – Left<br>B – Backward<br>R – Right | 30K – 3000K<br>40K – 4000K<br>50K – 5000K | Blank – No Receptacle<br>N7 – NEMA 7-PIN <sup>3</sup> | BR – Bronze<br>WH – White<br>BK – Black | See Below |

### Factory Installed Options (add to end of catalog number)<sup>6,7</sup>

**Blank** – No Added Control

**MS** – PIR/Daylight Sensor

**P3** – Adds a NEMA 3-Pin Photocell in the box

**P7** – Adds a NEMA 7-Pin Photocell in the box

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>3</sup> Can be used with a standard 3-pin photocontrol.

<sup>4</sup> 3000K CCT is a special order item. Work with your TCP Representative for lead time details.

<sup>5</sup> BR - Bronze is the standard color. Other colors listed on spec sheet will require extended lead times. Work with your TCP Representative for lead time details.

<sup>6</sup> Leave photocell receptacle "Blank" when ordering MS control.

<sup>7</sup> When adding P3 or P7 to the box, you must include the N7 photocell receptacle in your item number. For HZD products, photocell can only be applied in 347-480V applications.

### Field Installed Accessories

**TALPIRREMOTE** – Remote Control to program the Motion Sensor. Only one needed per job

**4INPOLEREDUCER** – 4" Pole Reducer

**5INPOLEREDUCER** – 5" Pole Reducer

**TALSHIELD1** – Backlight Shield for A2 & A3 lumen packages

**TALSHIELD2** – Backlight Shield for A4 & A5 lumen packages

**PC3UNDBU** – 3 Pin ON/OFF only photocontrol for use with 120-277V applications

**PC7UDIMBU** – 7 Pin ON/OFF + daylight harvest photocontrol for use with 120-277V applications

**PC3HNDDBU** – 3 Pin ON/OFF only photocontrol for use with 347-480V applications

**PC7HDIMBU** – 7 Pin ON/OFF + daylight harvest photocontrol for use with 347-480V applications

# Elements LED Sports Light

Elements  
by TCP



TCP's LED Sports Light is the perfect option for indoor and outdoor applications that require bright, energy efficient lighting. The Sports Light is rated to -40°C for cold weather applications, comes standard with 0-10V dimming, 5700K CCT, and provides up to 47,500 lumens. Optional upright shield accessory available to decrease glare and light pollution.

## Features & Benefits

- Long 50,000 hour rated life reduces maintenance and replacement costs
- Die-cast aluminum housing with impact resistant acrylic lens
- Yoke mounting comes standard for easy installation or retrofits
- Delivers bright, uniform light
- -40°C temperature rating

## Catalog Ordering Matrix

| FAMILY                | VOLTAGE      | CONTROLS           | LUMEN PACKAGE (POWER) <sup>1,2</sup> | CCT         | OPTIC                  | Options   |
|-----------------------|--------------|--------------------|--------------------------------------|-------------|------------------------|-----------|
| SP – LED Sports Light | U – 120-277V | ZD – 0-10V Dimming | A4 – 47,500 Lumens (320W)            | 57K – 5700K | 30D – 30° Distribution | See Below |

Factory Installed Options (add to end of catalog number)

NA – Not Available

Field Installed Accessories

SPVISOR1 – Uplight visor accessory

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.



# Select Series Flood Light



TCP's Select Series LED Flood Lights offer three wattage selectable SKU levels that can cover 10W-100W and 3000K, 4000K, and 5000K color selectable options. Customers can customize the light to best illuminate their outdoor spaces, no matter how big or small. They are equipped to handle any wall washing, sign illumination, or accent lighting applications.

## Features & Benefits

- Wattage package options: 10/20/30W, 40/50/60W, 50/80/100W
- Each SKU 30/40/50K CCT selectable
- Long 50,000 hour rated life reduces maintenance and replacement costs
- Delivers bright, uniform light
- Die-cast aluminum housing with impact-resistant tempered glass lens
- Knuckle and Yoke mounting options for easy installation or retrofits
- CRI >70
- UL IP65 listed for wet locations



## Catalog Ordering Matrix

| FAMILY                       | MOUNTING                | VOLTAGE      | CONTROLS           | LUMEN PACKAGE (POWER) <sup>1,2</sup>                                                                           | CCT                                | Options   |
|------------------------------|-------------------------|--------------|--------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------|-----------|
| SFL – Selectable Flood Light | K – Knuckle<br>Y – Yoke | U – 120-277V | ZD – 0-10V Dimming | SW4 – 3900/2600/1300L (30/20/10W)<br>SW7 – 7800/6500/5200L (60/50/40W)<br>SW9 – 13500/10800/6750L (100/80/50W) | CCT – 3000K/4000K/5000K Selectable | See Below |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

NA – Not Available

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.



# Elements LED Flood Light

Elements  
by TCP



TCP's LED Flood Light features a robust energy efficient design, perfect for outdoor landscape, wall wash, and other accent lighting applications. This energy saving LED alternative delivers bright uniform light at a wide 100° beam angle. A long 50,000 hour rated life significantly decreases maintenance, labor, and material costs over the life of the fixture.

## Features & Benefits

- Long 50,000 hour rated life reduces maintenance and replacement costs
- Die-cast aluminum housing with impact resistant acrylic lens
- Knuckle and Yoke mounting options for easy installation or retrofits
- Delivers bright, uniform light

## Catalog Ordering Matrix

| FAMILY            | MOUNTING                | VOLTAGE      | LUMEN PACKAGE (POWER) <sup>1,2</sup>                                       | BEAM ANGLE           | CCT                        | FINISH      | Options   |
|-------------------|-------------------------|--------------|----------------------------------------------------------------------------|----------------------|----------------------------|-------------|-----------|
| FL – Flood Lights | K – Knuckle<br>Y – Yoke | U – 120-277V | A1 – 1650 Lumens (15W)<br>A2 – 2750 Lumens (25W)<br>A3 – 5750 Lumens (50W) | W – Wide Beam (100°) | 40K – 4000K<br>50K – 5000K | BR – Bronze | See Below |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

NA – Not Available

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.



# LED Barn Light



The LED Barn Light features a robust die-cast aluminum housing incorporating an impact-resistant polycarbonate lens. NEMA 3-pin photocontrol comes standard in the box. The Barn Light mounts directly to a wall or horizontal arm up to 3" nominal diameter for easy installation or retrofit of traditional luminaires.



## Features & Benefits

- Long 50,000 hour rated life minimizes replacements and labor costs
- Efficiently delivers up to 150 LPW
- Impact-resistant polycarbonate lens
- Die-cast aluminum housing
- Outdoor Wet Location Rated
- Mounts to a wall or horizontal arm up to 3" nominal diameter

## Catalog Ordering Matrix

| FAMILY           | VOLTAGE      | DIMMING            | LUMEN PACKAGE (POWER) <sup>1,2</sup>             | CCT                        | CONTROLS                  | FINISH      | Options   |
|------------------|--------------|--------------------|--------------------------------------------------|----------------------------|---------------------------|-------------|-----------|
| BNL – Barn Light | U – 120V-277 | ZD – 0-10V Dimming | A2 – 6000 Lumens (40W)<br>A3 – 9000 Lumens (60W) | 40K – 4000K<br>50K – 5000K | N3 – NEMA 3 PIN Photocell | BR – Bronze | See Below |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

NA – Not Available

<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>2</sup> Actual wattage may vary by +/- 10%.



# LED Security Light



The LED Security Light features robust die-cast aluminum housing incorporating an impact resistant acrylic lens. An integrated button photocell is standard for dusk-to-dawn control. The security light mounts directly to a wall or horizontal arm up to 1 5/8" O.D. for easy installation or retrofit of traditional luminaires.

## Features & Benefits

- Long 50,000 hour rated life minimizes replacements and labor costs
- Efficiently delivers up to 144 LPW
- Impact resistant acrylic lens
- Die-cast aluminum housing
- UL approved for wet locations
- Mounts to a wall or horizontal arm up to 1 5/8" O.D.

## Catalog Ordering Matrix

| FAMILY               | VOLTAGE     | LUMEN PACKAGE (POWER) <sup>1,2</sup>               | CCT                        | CONTROL        | FINISH      | Options   |
|----------------------|-------------|----------------------------------------------------|----------------------------|----------------|-------------|-----------|
| RSL – Security Light | U – 120-77V | A1 = 3,800 Lumens (27W)<br>A2 = 5,500 Lumens (40W) | 40K – 4000K<br>50K – 5000K | PC – Photocell | SV – Silver | See Below |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories

NA – Not Available

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.





# Horticulture Lighting

Research tells us that LED lighting will continue to hold the largest revenue share in the horticulture lighting market for the foreseeable future. TCP is proud to offer you new LED products in this expanding industry.

## In this section:

|                                        |           |
|----------------------------------------|-----------|
| HTM Series Horticulture Top Light..... | <b>36</b> |
| Horticulture LED Vapor Light.....      | <b>37</b> |
| Horticulture Starlight Lamp.....       | <b>38</b> |
| Horticulture LED Rail Light.....       | <b>39</b> |
| Horticulture LED Area Light.....       | <b>40</b> |



# HTM Series Horticulture Top Light



The TCP HTM Series Horticulture Top Light features a lightweight design that supports flowering and growth stages of plant development.




## Features & Benefits

- Industry-leading efficacy: up to 2.60  $\mu\text{mol}/\text{J}$
- Powerful 612  $\mu\text{mol}/\text{s}$  photosynthetic photon flux
- Instant on, no warm up time for full light
- Long-life: 50,000 hours
- Durable, lightweight aluminum housing
- Power washer rated IP66 wet location rating

## TCP Quick Connect Daisy Chain System

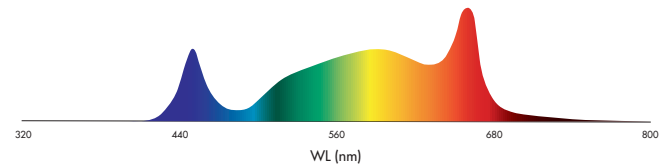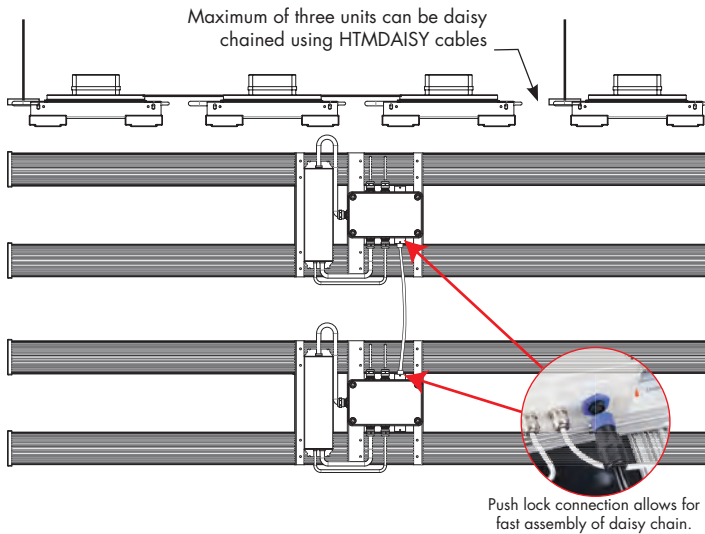

TCP Full Spectrum Technology

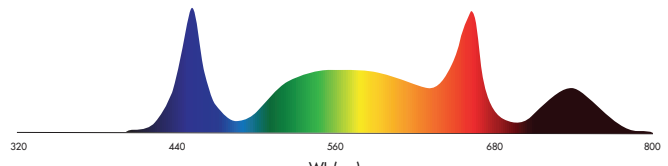

TCP Far-Red Spectrum Technology

## Catalog Ordering Matrix

| FAMILY                       | VOLTAGE      | CONTROLS           | PHOTOSYNTHETIC FLUX (POWER) <sup>1,2</sup> | SPECTRUM                                            |
|------------------------------|--------------|--------------------|--------------------------------------------|-----------------------------------------------------|
| HTM – Horticulture Top Light | U – 120-277V | ZD – 0-10V Dimming | A3 – 612 $\mu\text{mol}/\text{s}$ (236W)   | S1 – Full Spectrum<br>SRI – Full Spectrum + Far Red |

### Factory Installed Options (add to end of catalog number)

NA – Not Available

### Field Installed Accessories


HTMDAISY2FT – 2FT daisy chain 5-wire power cord

HTMDAISY6FT – 6FT daisy chain 5-wire power cord

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

# Horticulture LED Vapor Tight

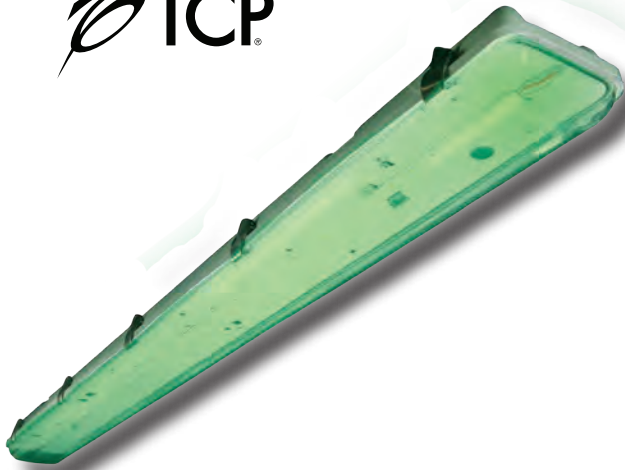


TCP's Green Spectrum LED Horticulture Vapor Tight is the perfect solution for working in grow rooms at night without disrupting plant photoperiods. Great for hallways outside grow rooms, egress and task lighting, the IP65 wet location rated Green Spectrum LED Horticulture Vapor Tight comes with everything needed for quick installation.

## Features & Benefits

- TCP's isolated green spectrum reduces the risk of photoperiod disruption
- Durable plastic housing
- Wet location rated
- Long-life: 50,000 hours
- Operating temperature: -4°F to 122°F
- Wide beam spread

## Green Spectrum Advantages

- 540nm focus without bleed into red or blue light ranges
- Good for "short day" plants
- For best results, a short exposure period is recommended
- Great for hallways and areas neighboring indoor grow rooms, emergency egress lighting, and brief plant health checks

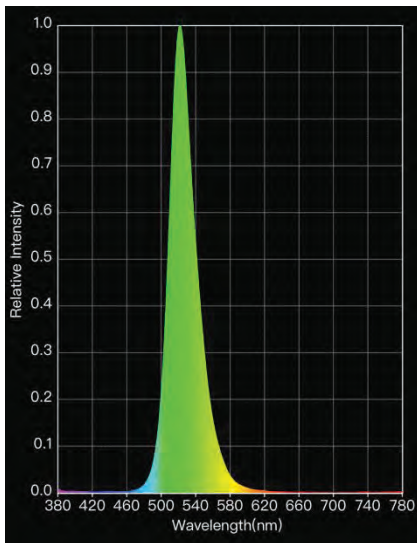

Green HVT Spectrum

## Catalog Ordering Matrix

| FAMILY                         | LENGTH     | VOLTAGE      | CONTROLS           | LUMEN PACKAGE <sup>1,2</sup>        | SPECTRUM   | OPTIONS   |
|--------------------------------|------------|--------------|--------------------|-------------------------------------|------------|-----------|
| HVT – Horticulture Vapor Tight | 2 – 2 Foot | U – 120-277V | ZD – 0-10V Dimming | E1 – 500L (10W)<br>A1 – 1100L (20W) | G1 – Green | See Below |
|                                | 4 – 4 Foot |              |                    | A2 – 4000L (40W)                    |            |           |

### Factory Installed Options (add to end of catalog number)

BLANK – No add-on

EB – Emergency Battery Backup

### Power Cord Option

BLANK – No add-on

IP – 6' cord with NEMA 515 plug

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

# Horticulture Starlight Lamp



The TCP Horticulture Starlight offers a stylish alternative to the traditional grow light. With an industry leading PPF output of up to 60  $\mu\text{mol/s}$ , the TCP Horticulture Starlight ensures that your plants are being fed the sunlight energy they need year round.




## Features & Benefits

- 110° beam angle allows for larger light spread over plants
- High-powered but efficient! PPE = 2.44  $\mu\text{mol/J}$
- TCP's full spectrum technology is designed for all plant species

## Specifications:

|              |                        |
|--------------|------------------------|
| PPF.....     | 60 $\mu\text{mol/s}$   |
| PPE.....     | 2.44 $\mu\text{mol/J}$ |
| Watts.....   | 24.31                  |
| Volts.....   | 120                    |
| PF.....      | 0.9827                 |
| Amp.....     | 0.21                   |
| Dimming..... | Triac                  |

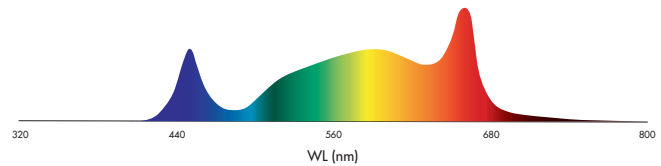

TCP Full Spectrum Technology

## Catalog Ordering Matrix

| ITEM #              | DESCRIPTION                    | VOLTAGE | LED WATTS | BEAM ANGLE | MOL (inches) | DIA (inches) | BASE |
|---------------------|--------------------------------|---------|-----------|------------|--------------|--------------|------|
| L25SL22HD30VGWCLAMP | LED HORTICULTURE STARLIGHT 22W | 120V    | 25        | 110°       | 4.8          | 8.9          | E26  |

## Clamp Accessory (Included in Box):

Clamp-mounted fixture allows maximum flexibility for positioning the Horticulture LED Starlight Lamp for best light absorption




# Horticulture LED Light Rail



Get a head start on this year's growing season by bringing the sun indoors with the TCP Horticulture Light Rail. The Horticulture Light Rail features a powerful PPF output of up to 122  $\mu\text{mol/s}$ , ensuring year-round sunlight energy for your plants.

## Features & Benefits

- 120° beam angle allows for larger light spread over plants
- High powered and efficient! PPE = 2.5  $\mu\text{mol/J}$
- TCP's Full Spectrum technology is designed for all plant species

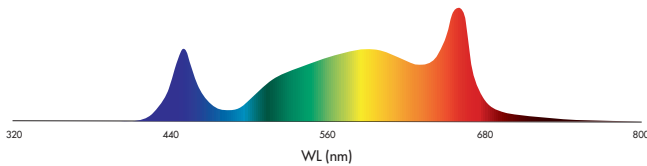

TCP Full Spectrum Technology

## Catalog Ordering Matrix

| FAMILY                         | LENGTH     | VOLTAGE      | CONTROLS           | WATTAGE <sup>1,2</sup> | SPECTRUM                  |
|--------------------------------|------------|--------------|--------------------|------------------------|---------------------------|
| RHLR – Horticulture Light Rail | 2 – 2 Foot | U – 120-277V | ZD – 0-10V Dimming | A1 – 50W               | VG – Full Growth Spectrum |
|                                | 4 – 4 Foot |              |                    | A2 – 100W              |                           |

<sup>1</sup> Actual wattage may vary by +/- 10%.



<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.



# Horticulture LED Area Light



TCP's HTAL Series Horticulture LED Area Light is designed to provide efficient lighting to large growing areas. The HTAL Series Area Light is a low-profile, lightweight, and low maintenance solution that provides full spectrum light to support both the flowering and the growth stages of plant development.

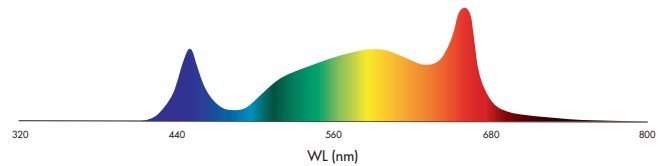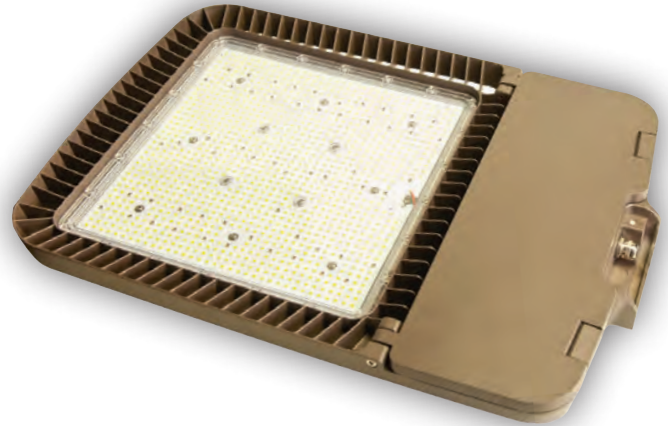

TCP Full Spectrum Technology

## Features & Benefits

- High efficacy: up to 2.50  $\mu\text{mol}/\text{J}$
- Powerful 580  $\mu\text{mol}/\text{s}$  photosynthetic photon flux
- Instant on, no warm up time for full light
- Long-life: 50,000 hours
- Lightweight and low Effective Projected Area (EPA) reduces stress on existing poles
- IP65 rating prevents dirt and grime buildup behind fixture lens

## Catalog Ordering Matrix

| FAMILY                         | VOLTAGE                      | CONTROLS           | LUMEN PACKAGE <sup>1,2</sup> | SPECTRUM           |
|--------------------------------|------------------------------|--------------------|------------------------------|--------------------|
| HTAL – Horticulture Area Light | U – 120-277V<br>H – 347/480V | ZD – 0-10V Dimming | G4 – 30,200 Lumens (240W)    | S1 – Full Spectrum |

### Factory Installed Options (add to end of catalog number)

NA – Not available

### Mounting Options

**TALSLIPFITTER** – This cast aluminum slipfitter mount secures the luminaire to nominal 3" (2 3/8" O.D. pipe size) horizontal arm or vertical tenon. This mount can also be applied directly to the wall using the flanges.

**TALRPOLEADAPTER** – This round or square pole mount adapter allows the TALSLIPFITTER to mount the side of a round or square pole. This can be used with 4" or 5" square or round poles.

**TALTRUNNION** – This trunnion mount accessory allows for wall mounting with a flexible angle adjustment.

### Field Installed Accessories

**4INPOLEREDUCER** – 4" Pole Reducer

**5INPOLEREDUCER** – 5" Pole Reducer

**TALSHIELD2** – Backlight Shield

**PC3UNDBU** – 3 Pin ON/OFF only photocontrol for use with 120-277V applications

**PC7UDIMBU** – 7 Pin ON/OFF + daylight harvest photocontrol for use with 120-277V applications

**PC3HNDBU** – 3 Pin ON/OFF only photocontrol for use with 347-480V applications

**PC7HDIMBU** – 7 Pin ON/OFF + daylight harvest photocontrol for use with 347-480V applications

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

# Decorative Fixtures

Combining thoughtful, popular designs with high-quality, energy-efficient lighting, TCP's Decorative Fixtures provide solutions to a variety of needs. They can stimulate creativity in the workplace or enhance comfort at home.



## In this section:

|                                         |              |
|-----------------------------------------|--------------|
| Vanity Lighting .....                   | <b>42-43</b> |
| Chandelier & Pendant Lighting .....     | <b>44</b>    |
| Sconce Lighting .....                   | <b>45</b>    |
| Flush & Semi-Flush Mount Lighting ..... | <b>46-50</b> |
| Round Pendant Lights .....              | <b>51</b>    |
| Solistic Table and Floor Lights .....   | <b>52</b>    |
| Residential Security Lighting .....     | <b>53</b>    |
| Under Cabinet Lighting .....            | <b>54</b>    |
| Accents Pendant Lights .....            | <b>55-56</b> |

# Vanity Lighting

TCP's LED Vanity Lighting provides long-lasting, even illumination for both residential and commercial applications. These fixtures feature either an integrated LED light source or include LED bulbs for ease of installation with high CRI, flicker-free LED performance.

## Features & Benefits

- Includes either an integrated LED light source or LED bulbs included (A19, E26)
- A variety of designs and shades to match any design style
- ETL listed for damp locations (indoor)

## Specifications

|                               |                                                          |
|-------------------------------|----------------------------------------------------------|
| Color Temperatures            | .....2700K, 3000K, 4100K<br>2700K/3000K/4100K Selectable |
| Input Line Voltage            | ..... 120V                                               |
| Input Line Frequency (Hz)     | .....60Hz                                                |
| Lamp Life (Rated)             | ..... 25,000 hours                                       |
| Dimming                       | ..... 120V Triac                                         |
| Minimum Starting Temperature  | ..... -22°C (-8°F)                                       |
| Maximum Operating Temperature | ..... 45°C (113°F)                                       |
| CRI                           | ..... 80, 90                                             |
| Base                          | ..... E26                                                |

### Traditional Bath Vanity – Tulip Shaped Shades • E26 Base • 25,000 Rated Life



| ITEM #     | DESCRIPTION                          | VOLTAGE | # OF LAMPS | LAMP WATTS | LUMENS | LPW  | CCT   | CRI | FINISH         | LAMP SHAPE |
|------------|--------------------------------------|---------|------------|------------|--------|------|-------|-----|----------------|------------|
| TBVT2BN27K | TRADITIONAL BATH VANITY TULIP 2L 27K | 120V    | 2          | 10         | 800    | 80.0 | 2700K | 90  | BRUSHED NICKEL | A19        |
| TBVT2BN30K | TRADITIONAL BATH VANITY TULIP 2L 30K | 120V    | 2          | 10         | 800    | 80.0 | 3000K | 90  | BRUSHED NICKEL | A19        |
| TBVT2BN41K | TRADITIONAL BATH VANITY TULIP 2L 41K | 120V    | 2          | 10         | 800    | 80.0 | 4100K | 90  | BRUSHED NICKEL | A19        |
| TBVT3BN27K | TRADITIONAL BATH VANITY TULIP 3L 27K | 120V    | 3          | 10         | 800    | 80.0 | 2700K | 90  | BRUSHED NICKEL | A19        |
| TBVT3BN30K | TRADITIONAL BATH VANITY TULIP 3L 30K | 120V    | 3          | 10         | 800    | 80.0 | 3000K | 90  | BRUSHED NICKEL | A19        |
| TBVT3BN41K | TRADITIONAL BATH VANITY TULIP 3L 41K | 120V    | 3          | 10         | 800    | 80.0 | 4100K | 90  | BRUSHED NICKEL | A19        |
| TVBT4BN27K | TRADITIONAL BATH VANITY TULIP 4L 27K | 120V    | 4          | 10         | 800    | 80.0 | 2700K | 90  | BRUSHED NICKEL | A19        |
| TVBT4BN30K | TRADITIONAL BATH VANITY TULIP 4L 30K | 120V    | 4          | 10         | 800    | 80.0 | 3000K | 90  | BRUSHED NICKEL | A19        |
| TVBT4BN41K | TRADITIONAL BATH VANITY TULIP 4L 41K | 120V    | 4          | 10         | 800    | 80.0 | 4100K | 90  | BRUSHED NICKEL | A19        |
| TVBT6BN27K | TRADITIONAL BATH VANITY TULIP 6L 27K | 120V    | 6          | 10         | 800    | 80.0 | 2700K | 90  | BRUSHED NICKEL | A19        |
| TVBT6BN30K | TRADITIONAL BATH VANITY TULIP 6L 30K | 120V    | 6          | 10         | 800    | 80.0 | 3000K | 90  | BRUSHED NICKEL | A19        |
| TVBT6BN41K | TRADITIONAL BATH VANITY TULIP 6L 41K | 120V    | 6          | 10         | 800    | 80.0 | 4100K | 90  | BRUSHED NICKEL | A19        |

### Classic Bath Vanity – Tulip Shaped Shades • E26 Base • 25,000 Rated Life



|             |                                  |      |   |   |     |      |       |    |                |     |
|-------------|----------------------------------|------|---|---|-----|------|-------|----|----------------|-----|
| CLBVT2BN27K | CLASSIC BATH VANITY TULIP 2L 27K | 120V | 2 | 6 | 475 | 79.2 | 2700K | 90 | BRUSHED NICKEL | A19 |
| CLBVT2BN30K | CLASSIC BATH VANITY TULIP 2L 30K | 120V | 2 | 6 | 475 | 79.2 | 3000K | 90 | BRUSHED NICKEL | A19 |
| CLBVT2BN41K | CLASSIC BATH VANITY TULIP 2L 41K | 120V | 2 | 6 | 525 | 87.5 | 4100K | 90 | BRUSHED NICKEL | A19 |
| CLBVT3BN27K | CLASSIC BATH VANITY TULIP 3L 27K | 120V | 3 | 6 | 475 | 79.2 | 2700K | 90 | BRUSHED NICKEL | A19 |
| CLBVT3BN30K | CLASSIC BATH VANITY TULIP 3L 30K | 120V | 3 | 6 | 475 | 79.2 | 3000K | 90 | BRUSHED NICKEL | A19 |
| CLBVT3BN41K | CLASSIC BATH VANITY TULIP 3L 41K | 120V | 3 | 6 | 525 | 87.5 | 4100K | 90 | BRUSHED NICKEL | A19 |
| CLBVT4BN27K | CLASSIC BATH VANITY TULIP 4L 27K | 120V | 4 | 6 | 475 | 79.2 | 2700K | 90 | BRUSHED NICKEL | A19 |
| CLBVT4BN30K | CLASSIC BATH VANITY TULIP 4L 30K | 120V | 4 | 6 | 475 | 79.2 | 3000K | 90 | BRUSHED NICKEL | A19 |
| CLBVT4BN41K | CLASSIC BATH VANITY TULIP 4L 41K | 120V | 4 | 6 | 525 | 87.5 | 4100K | 90 | BRUSHED NICKEL | A19 |

# Vanity Lighting

## Classic Bath Vanity – Bell Shaped Shades • E26 Base • 25,000 Rated Life




| ITEM #      | DESCRIPTION                     | VOLTAGE | # OF LAMPS | LAMP WATTS | LUMENS | LPW  | CCT   | CRI | FINISH         | LAMP SHAPE |
|-------------|---------------------------------|---------|------------|------------|--------|------|-------|-----|----------------|------------|
| CLBVB2BN27K | CLASSIC BATH VANITY BELL 2L 27K | 120V    | 2          | 6          | 475    | 79.2 | 2700K | 90  | BRUSHED NICKEL | A19        |
| CLBVB2BN30K | CLASSIC BATH VANITY BELL 2L 30K | 120V    | 2          | 6          | 475    | 79.2 | 3000K | 90  | BRUSHED NICKEL | A19        |
| CLBVB2BN41K | CLASSIC BATH VANITY BELL 2L 41K | 120V    | 2          | 6          | 525    | 87.5 | 4100K | 90  | BRUSHED NICKEL | A19        |
| CLBVB3BN27K | CLASSIC BATH VANITY BELL 3L 27K | 120V    | 3          | 6          | 475    | 79.2 | 2700K | 90  | BRUSHED NICKEL | A19        |
| CLBVB3BN30K | CLASSIC BATH VANITY BELL 3L 30K | 120V    | 3          | 6          | 475    | 79.2 | 3000K | 90  | BRUSHED NICKEL | A19        |
| CLBVB3BN41K | CLASSIC BATH VANITY BELL 3L 41K | 120V    | 3          | 6          | 525    | 87.5 | 4100K | 90  | BRUSHED NICKEL | A19        |
| CLBVB4BN27K | CLASSIC BATH VANITY BELL 4L 27K | 120V    | 4          | 6          | 475    | 79.2 | 2700K | 90  | BRUSHED NICKEL | A19        |
| CLBVB4BN30K | CLASSIC BATH VANITY BELL 4L 30K | 120V    | 4          | 6          | 475    | 79.2 | 3000K | 90  | BRUSHED NICKEL | A19        |
| CLBVB4BN41K | CLASSIC BATH VANITY BELL 4L 41K | 120V    | 4          | 6          | 525    | 87.5 | 4100K | 90  | BRUSHED NICKEL | A19        |

## Classic Bath Vanity – Square Shaped Shades • E26 Base • 25,000 Rated Life



|              |                                   |      |   |   |     |      |       |    |                |     |
|--------------|-----------------------------------|------|---|---|-----|------|-------|----|----------------|-----|
| CLBVSQ2BN27K | CLASSIC BATH VANITY SQUARE 2L 27K | 120V | 2 | 6 | 475 | 79.2 | 2700K | 90 | BRUSHED NICKEL | A19 |
| CLBVSQ2BN30K | CLASSIC BATH VANITY SQUARE 2L 30K | 120V | 2 | 6 | 475 | 79.2 | 3000K | 90 | BRUSHED NICKEL | A19 |
| CLBVSQ2BN41K | CLASSIC BATH VANITY SQUARE 2L 41K | 120V | 2 | 6 | 525 | 87.5 | 4100K | 90 | BRUSHED NICKEL | A19 |
| CLBVSQ3BN27K | CLASSIC BATH VANITY SQUARE 3L 27K | 120V | 3 | 6 | 475 | 79.2 | 2700K | 90 | BRUSHED NICKEL | A19 |
| CLBVSQ3BN30K | CLASSIC BATH VANITY SQUARE 3L 30K | 120V | 3 | 6 | 475 | 79.2 | 3000K | 90 | BRUSHED NICKEL | A19 |
| CLBVSQ3BN41K | CLASSIC BATH VANITY SQUARE 3L 41K | 120V | 3 | 6 | 525 | 87.5 | 4100K | 90 | BRUSHED NICKEL | A19 |
| CLBVSQ4BN27K | CLASSIC BATH VANITY SQUARE 4L 27K | 120V | 4 | 6 | 475 | 79.2 | 2700K | 90 | BRUSHED NICKEL | A19 |
| CLBVSQ4BN30K | CLASSIC BATH VANITY SQUARE 4L 30K | 120V | 4 | 6 | 475 | 79.2 | 3000K | 90 | BRUSHED NICKEL | A19 |
| CLBVSQ4BN41K | CLASSIC BATH VANITY SQUARE 4L 41K | 120V | 4 | 6 | 525 | 87.5 | 4100K | 90 | BRUSHED NICKEL | A19 |

## Vanity Bar Tube – Integrated LED • 50,000 Rated Life



|                 |                                               |      |   |    |      |      |                           |    |                |   |
|-----------------|-----------------------------------------------|------|---|----|------|------|---------------------------|----|----------------|---|
| VBBVTB24INBNCCT | VANITY BAR TUBE INTEGRATED 24" CCT SELECTABLE | 120V | - | 25 | 1750 | 70.0 | 2700K/<br>3000K/<br>4100K | 80 | BRUSHED NICKEL | - |
| VBBVTB32INBNCCT | VANITY BAR TUBE INTEGRATED 32" CCT SELECTABLE | 120V | - | 30 | 2100 | 70.0 | 2700K/<br>3000K/<br>4100K | 80 | BRUSHED NICKEL | - |

## Vanity Bar Cylinder – Integrated LED • 50,000 Rated Life



|                 |                                                   |      |   |    |      |      |                           |    |                |   |
|-----------------|---------------------------------------------------|------|---|----|------|------|---------------------------|----|----------------|---|
| VBBVCL24INBNCCT | VANITY BAR CYLINDER INTEGRATED 24" CCT SELECTABLE | 120V | - | 25 | 1750 | 70.0 | 2700K/<br>3000K/<br>4100K | 80 | BRUSHED NICKEL | - |
| VBBVCL32INBNCCT | VANITY BAR CYLINDER INTEGRATED 32" CCT SELECTABLE | 120V | - | 30 | 2100 | 70.0 | 2700K/<br>3000K/<br>4100K | 80 | BRUSHED NICKEL | - |

## Traditional Overbed Vanity – Integrated LED • 50,000 Rated Life



|              |                                    |      |   |    |      |      |       |    |       |   |
|--------------|------------------------------------|------|---|----|------|------|-------|----|-------|---|
| TROBED4WH30K | TRADITIONAL OVERBED VANITY 48" 30K | 120V | - | 15 | 1050 | 70.0 | 3000K | 80 | WHITE | - |
|--------------|------------------------------------|------|---|----|------|------|-------|----|-------|---|

# Chandelier & Pendant Lighting

The contemporary LED Chandeliers from TCP provide long-lasting illumination for both residential and commercial applications. These bulb-in-a-box solutions come prepackaged with LED bulbs for ease of installation with high CRI, flicker-free LED performance.

## Features & Benefits

- LED bulbs included
- High 90 CRI value provides excellent color rendering and consistency
- A variety of designs and shades to match any design style
- ETL listed for damp locations (indoor)

## Specifications

Color Temperatures ..... 2700K, 3000K, 4100K  
 Input Line Voltage..... 120V  
 Input Line Frequency (Hz) ..... 60Hz  
 Lamp Life (Rated)..... 25,000 hours  
 Dimming ..... 120V Triac  
 Minimum Starting Temperature..... -22°C (-8°F)  
 Maximum Operating Temperature ..... 45°C (113°F)  
 CRI..... 90  
 Base..... E26

| ITEM # | DESCRIPTION | VOLTAGE | # OF LAMPS | LAMP WATTS | LUMENS | LPW | CCT | CRI | FINISH | LAMP SHAPE |
|--------|-------------|---------|------------|------------|--------|-----|-----|-----|--------|------------|
|--------|-------------|---------|------------|------------|--------|-----|-----|-----|--------|------------|



### Classic Chandelier – Bell Shaped Shades • E26 Base • 25,000 Rated Life

|              |                                    |      |   |   |     |      |       |    |                |     |
|--------------|------------------------------------|------|---|---|-----|------|-------|----|----------------|-----|
| CLCH3BBND27K | CLASSIC CHANDELIER BELL 3L DIM 27K | 120V | 3 | 6 | 475 | 79.2 | 2700K | 90 | BRUSHED NICKEL | A19 |
| CLCH3BBND30K | CLASSIC CHANDELIER BELL 3L DIM 30K | 120V | 3 | 6 | 475 | 79.2 | 3000K | 90 | BRUSHED NICKEL | A19 |
| CLCH3BBND41K | CLASSIC CHANDELIER BELL 3L DIM 41K | 120V | 3 | 6 | 525 | 87.5 | 4100K | 90 | BRUSHED NICKEL | A19 |

### Classic Chandelier – Round Shaped Shades • E26 Base • 25,000 Rated Life



|               |                                     |      |   |   |     |      |       |    |                |     |
|---------------|-------------------------------------|------|---|---|-----|------|-------|----|----------------|-----|
| CLCH3RDBND27K | CLASSIC CHANDELIER ROUND 3L DIM 27K | 120V | 3 | 6 | 475 | 79.2 | 2700K | 90 | BRUSHED NICKEL | A19 |
| CLCH3RDBND30K | CLASSIC CHANDELIER ROUND 3L DIM 30K | 120V | 3 | 6 | 475 | 79.2 | 3000K | 90 | BRUSHED NICKEL | A19 |
| CLCH3RDBND41K | CLASSIC CHANDELIER ROUND 3L DIM 41K | 120V | 3 | 6 | 525 | 87.5 | 4100K | 90 | BRUSHED NICKEL | A19 |

### Vintage Pendant – Bell Shaped Shade • E26 Base • 15,000 Rated Life



|            |                                 |      |   |     |     |      |       |    |       |      |
|------------|---------------------------------|------|---|-----|-----|------|-------|----|-------|------|
| VP1BBLD27K | VINTAGE PENDANT BELL 1L DIM 27K | 120V | 1 | 4.2 | 340 | 81.0 | 2700K | 90 | BLACK | ST19 |
|------------|---------------------------------|------|---|-----|-----|------|-------|----|-------|------|

### Classic Pendant – Cylinder Shaped Shade • E26 Base • 15,000 Rated Life



|             |                                     |      |   |     |     |      |       |    |                |      |
|-------------|-------------------------------------|------|---|-----|-----|------|-------|----|----------------|------|
| CLP1CBND27K | CLASSIC PENDANT CYLINDER 1L DIM 27K | 120V | 1 | 4.2 | 340 | 81.0 | 2700K | 90 | BRUSHED NICKEL | ST19 |
|-------------|-------------------------------------|------|---|-----|-----|------|-------|----|----------------|------|

# Sconce Lighting


TCP's LED Classic Bell Half Sconces provide long-lasting illumination for both residential and commercial applications. These fixtures feature either an integrated LED light source or include LED bulbs for ease of installation with high CRI, flicker-free LED performance.

## Features & Benefits

- Includes either an integrated LED light source or LED bulbs included
- A variety of designs and shades to match any design style

## Specifications

Color Temperatures ..... 2700K, 3000K, 4100K  
 3000K/4000K/5000K Selectable  
 Input Line Voltage ..... 120V  
 Input Line Frequency (Hz) ..... 60Hz  
 Lamp Life (Rated) ..... 25,000 hours  
 CRI ..... 80, 90  
 Base ..... E26

| ITEM #                                                                            | DESCRIPTION   | VOLTAGE                        | LAMP WATTS | LUMENS | LPW | CCT  | CRI   | FINISH | LAMP SHAPE        |     |
|-----------------------------------------------------------------------------------|---------------|--------------------------------|------------|--------|-----|------|-------|--------|-------------------|-----|
| <b>Classic Sconce – Bell Shaped Shade • E26 Base • 25,000 Rated Life</b>          |               |                                |            |        |     |      |       |        |                   |     |
|  | CLSC1BORBD27K | CLASSIC SCONCE BELL 1L DIM 27K | 120V       | 6      | 475 | 79.2 | 2700K | 90     | OIL-RUBBED BRONZE | A19 |
|                                                                                   | CLSC1BORBD30K | CLASSIC SCONCE BELL 1L DIM 30K | 120V       | 6      | 475 | 79.2 | 3000K | 90     | OIL-RUBBED BRONZE | A19 |
|                                                                                   | CLSC1BORBD41K | CLASSIC SCONCE BELL 1L DIM 41K | 120V       | 6      | 525 | 87.5 | 4100K | 90     | OIL-RUBBED BRONZE | A19 |
|                                                                                   | CLSC1BBND27K  | CLASSIC SCONCE BELL 1L DIM 27K | 120V       | 6      | 475 | 79.2 | 2700K | 90     | BRUSHED NICKEL    | A19 |
|                                                                                   | CLSC1BBND30K  | CLASSIC SCONCE BELL 1L DIM 30K | 120V       | 6      | 475 | 79.2 | 3000K | 90     | BRUSHED NICKEL    | A19 |
|                                                                                   | CLSC1BBND41K  | CLASSIC SCONCE BELL 1L DIM 41K | 120V       | 6      | 525 | 87.5 | 4100K | 90     | BRUSHED NICKEL    | A19 |

## Traditional Half Sconce – Cylinder Shaped Shade • Brushed Nickel Finish • Integrated LED • 25,000 Rated Life



|               |                                                        |      |    |      |      |                           |    |                |   |
|---------------|--------------------------------------------------------|------|----|------|------|---------------------------|----|----------------|---|
| THSC1CBNDCCCT | TRADITIONAL HALF SCONCE CYLINDER 1L DIM CCT SELECTABLE | 120V | 15 | 1050 | 70.0 | 3000K/<br>4000K/<br>5000K | 80 | BRUSHED NICKEL | - |
|---------------|--------------------------------------------------------|------|----|------|------|---------------------------|----|----------------|---|

## Classic Half Sconce – Cylinder Shaped Shade • E26 Base • 25,000 Rated Life



|               |                                         |      |   |     |      |       |    |                |     |
|---------------|-----------------------------------------|------|---|-----|------|-------|----|----------------|-----|
| CLHSC1CBND27K | CLASSIC HALF SCONCE CYLINDER 1L DIM 27K | 120V | 6 | 475 | 79.2 | 2700K | 90 | BRUSHED NICKEL | A19 |
| CLHSC1CBND30K | CLASSIC HALF SCONCE CYLINDER 1L DIM 30K | 120V | 6 | 475 | 79.2 | 3000K | 90 | BRUSHED NICKEL | A19 |
| CLHSC1CBND41K | CLASSIC HALF SCONCE CYLINDER 1L DIM 41K | 120V | 6 | 525 | 87.5 | 4100K | 90 | BRUSHED NICKEL | A19 |

## Classic Half Sconce – Tulip Shaped Shade • E26 Base • 25,000 Rated Life



|                |                                      |      |   |     |      |       |    |                |     |
|----------------|--------------------------------------|------|---|-----|------|-------|----|----------------|-----|
| CLHSC1TLBND27K | CLASSIC HALF SCONCE TULIP 1L DIM 27K | 120V | 6 | 475 | 79.2 | 2700K | 90 | BRUSHED NICKEL | A19 |
| CLHSC1TLBND30K | CLASSIC HALF SCONCE TULIP 1L DIM 30K | 120V | 6 | 475 | 79.2 | 3000K | 90 | BRUSHED NICKEL | A19 |
| CLHSC1TLBND41K | CLASSIC HALF SCONCE TULIP 1L DIM 41K | 120V | 6 | 525 | 87.5 | 4100K | 90 | BRUSHED NICKEL | A19 |

## Classic Half Sconce – Bell Shaped Shade • E26 Base • 25,000 Rated Life



|                |                                     |      |   |     |      |       |    |                   |     |
|----------------|-------------------------------------|------|---|-----|------|-------|----|-------------------|-----|
| CLHSC1BBND27K  | CLASSIC HALF SCONCE BELL 1L DIM 27K | 120V | 6 | 475 | 79.2 | 2700K | 90 | BRUSHED NICKEL    | A19 |
| CLHSC1BBND30K  | CLASSIC HALF SCONCE BELL 1L DIM 30K | 120V | 6 | 475 | 79.2 | 3000K | 90 | BRUSHED NICKEL    | A19 |
| CLHSC1BBND41K  | CLASSIC HALF SCONCE BELL 1L DIM 41K | 120V | 6 | 525 | 87.5 | 4100K | 90 | BRUSHED NICKEL    | A19 |
| CLHSC1BORBD27K | CLASSIC HALF SCONCE BELL 1L DIM 27K | 120V | 6 | 475 | 79.2 | 2700K | 90 | OIL-RUBBED BRONZE | A19 |
| CLHSC1BORBD30K | CLASSIC HALF SCONCE BELL 1L DIM 30K | 120V | 6 | 475 | 79.2 | 3000K | 90 | OIL-RUBBED BRONZE | A19 |
| CLHSC1BORBD41K | CLASSIC HALF SCONCE BELL 1L DIM 41K | 120V | 6 | 525 | 87.5 | 4100K | 90 | OIL-RUBBED BRONZE | A19 |

# Flush Mount and Semi-Flush Mount Lighting

The flush mount and semi-flush mount fixtures from TCP provide long-lasting illumination for both residential and commercial applications. These fixtures feature either an integrated LED light source or include LED bulbs for ease of installation with high CRI, flicker-free LED performance.

## Features & Benefits

- Includes either an integrated LED light source or LED bulbs included
- A variety of designs and shades to match any design style
- ETL listed for damp locations (indoor)

## Specifications

Color Temperatures ..... 2700K, 3000K, 3500K, 4100K, 5000K  
 Input Line Voltage ..... 120V  
 Input Line Frequency (Hz) ..... 60Hz  
 Dimming ..... 120V Triac  
 Minimum Starting Temperature ..... -22°C (-8°F)  
 Maximum Operating Temperature ..... 45°C (113°F)  
 CRI ..... 80, 90

### LED 218 Series Flush Mount Luminaire – Integrated LED • 120° Beam Angle • 50,000 Hour Rated Life



| SERIES | FIXTURE TYPE    | DIAMETER     | LUMENS           | CCT         | FINISH              |
|--------|-----------------|--------------|------------------|-------------|---------------------|
| 218    | F = Flush Mount | 12 = 12 inch | A2 = 1400 Lumens | 27K = 2700K | BN = Brushed Nickel |
|        |                 |              |                  | 30K = 3000K |                     |
|        |                 |              |                  | 35K = 3500K |                     |
|        |                 |              |                  | 41K = 4100K |                     |
|        |                 |              |                  | 50K = 5000K |                     |
| 218    | F = Flush Mount | 14 = 14 inch | A3 = 1700 Lumens | 27K = 2700K | BN = Brushed Nickel |
|        |                 |              |                  | 30K = 3000K |                     |
|        |                 |              |                  | 35K = 3500K |                     |
|        |                 |              |                  | 41K = 4100K |                     |
|        |                 |              |                  | 50K = 5000K |                     |

### LED 219 Series Flush Mount Luminaire – Integrated LED • 120° Beam Angle • 50,000 Hour Rated Life



|     |                 |              |                  |             |                     |
|-----|-----------------|--------------|------------------|-------------|---------------------|
| 219 | F = Flush Mount | 10 = 10 inch | A2 = 1400 Lumens | 27K = 2700K | BN = Brushed Nickel |
|     |                 | 12 = 12 inch |                  | 30K = 3000K |                     |
|     |                 |              |                  | 35K = 3500K |                     |
|     |                 |              |                  | 41K = 4100K |                     |
|     |                 |              |                  | 50K = 5000K |                     |
| 219 | F = Flush Mount | 14 = 14 inch | A3 = 1700 Lumens | 27K = 2700K | BN = Brushed Nickel |
|     |                 |              |                  | 30K = 3000K |                     |
|     |                 |              |                  | 35K = 3500K |                     |
|     |                 |              |                  | 41K = 4100K |                     |
|     |                 |              |                  | 50K = 5000K |                     |

# Flush Mount and Semi-Flush Mount Lighting

## 12" Traditional Flush Mount – Round Shade • E26 Base • Dimmable • 25,000 Hour Rated Life



| ITEM #        | DESCRIPTION                       | VOLTAGE | LAMP WATTS | LUMENS | LPW  | CCT   | CRI | FIXTURE SIZE | FINISH            | LAMP SHAPE |
|---------------|-----------------------------------|---------|------------|--------|------|-------|-----|--------------|-------------------|------------|
| TFMRD12BND27K | TRADITIONAL FLUSH MOUNT ROUND 27K | 120V    | 13         | 1100   | 84.6 | 2700K | 90  | 12"          | BRUSHED NICKEL    | A19        |
| TFMRD12BND30K | TRADITIONAL FLUSH MOUNT ROUND 30K | 120V    | 13         | 1100   | 84.6 | 3000K | 90  | 12"          | BRUSHED NICKEL    | A19        |
| TFMRD12BND41K | TRADITIONAL FLUSH MOUNT ROUND 41K | 120V    | 13         | 1100   | 84.6 | 4100K | 90  | 12"          | BRUSHED NICKEL    | A19        |
| TFMRD12BND50K | TRADITIONAL FLUSH MOUNT ROUND 50K | 120V    | 13         | 1100   | 84.6 | 5000K | 90  | 12"          | BRUSHED NICKEL    | A19        |
| TFMRD12ORB27K | TRADITIONAL FLUSH MOUNT ROUND 27K | 120V    | 13         | 1100   | 84.6 | 2700K | 90  | 12"          | OIL-RUBBED BRONZE | A19        |
| TFMRD12ORB30K | TRADITIONAL FLUSH MOUNT ROUND 30K | 120V    | 13         | 1100   | 84.6 | 3000K | 90  | 12"          | OIL-RUBBED BRONZE | A19        |
| TFMRD12ORB41K | TRADITIONAL FLUSH MOUNT ROUND 41K | 120V    | 13         | 1100   | 84.6 | 4100K | 90  | 12"          | OIL-RUBBED BRONZE | A19        |
| TFMRD12ORB50K | TRADITIONAL FLUSH MOUNT ROUND 50K | 120V    | 13         | 1100   | 84.6 | 5000K | 90  | 12"          | OIL-RUBBED BRONZE | A19        |

## Traditional Flush Mount – Alabaster Glass Shade • Integrated LED • Dimmable • 50,000 Hour Rated Life



|                |                                   |      |    |      |      |             |    |     |                   |   |
|----------------|-----------------------------------|------|----|------|------|-------------|----|-----|-------------------|---|
| TFMRD11ABNDCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 15 | 1050 | 70.0 | 30K/40K/50K | 80 | 11" | BRUSHED NICKEL    | - |
| TFMRD13ABNDCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 20 | 1400 | 70.0 | 30K/40K/50K | 80 | 13" | BRUSHED NICKEL    | - |
| TFMRD15ABNDCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 25 | 1750 | 70.0 | 30K/40K/50K | 80 | 15" | BRUSHED NICKEL    | - |
| TFMRD11AORBCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 15 | 1050 | 70.0 | 30K/40K/50K | 80 | 11" | OIL-RUBBED BRONZE | - |
| TFMRD13AORBCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 20 | 1400 | 70.0 | 30K/40K/50K | 80 | 13" | OIL-RUBBED BRONZE | - |
| TFMRD15AORBCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 25 | 1750 | 70.0 | 30K/40K/50K | 80 | 15" | OIL-RUBBED BRONZE | - |
| TFMRD11AWHDCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 15 | 1050 | 70.0 | 30K/40K/50K | 80 | 11" | WHITE             | - |
| TFMRD13AWHDCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 20 | 1400 | 70.0 | 30K/40K/50K | 80 | 13" | WHITE             | - |
| TFMRD15AWHDCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 25 | 1750 | 70.0 | 30K/40K/50K | 80 | 15" | WHITE             | - |

## Traditional Flush Mount – Frosted Glass Shade • Integrated LED • Dimmable • 50,000 Hour Rated Life



|                 |                                   |      |    |      |      |             |    |     |                   |   |
|-----------------|-----------------------------------|------|----|------|------|-------------|----|-----|-------------------|---|
| CLFMRD11BNDCCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 15 | 1050 | 70.0 | 30K/40K/50K | 80 | 11" | BRUSHED NICKEL    | - |
| CLFMRD13BNDCCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 20 | 1400 | 70.0 | 30K/40K/50K | 80 | 13" | BRUSHED NICKEL    | - |
| CLFMRD15BNDCCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 25 | 1750 | 70.0 | 30K/40K/50K | 80 | 15" | BRUSHED NICKEL    | - |
| CLFMRD11ORBDCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 15 | 1050 | 70.0 | 30K/40K/50K | 80 | 11" | OIL-RUBBED BRONZE | - |
| CLFMRD13ORBDCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 20 | 1400 | 70.0 | 30K/40K/50K | 80 | 13" | OIL-RUBBED BRONZE | - |
| CLFMRD15ORBDCCT | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 25 | 1750 | 70.0 | 30K/40K/50K | 80 | 15" | OIL-RUBBED BRONZE | - |
| CLFMRD11WHDCCT  | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 15 | 1050 | 70.0 | 30K/40K/50K | 80 | 11" | WHITE             | - |
| CLFMRD13WHDCCT  | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 20 | 1400 | 70.0 | 30K/40K/50K | 80 | 13" | WHITE             | - |
| CLFMRD15WHDCCT  | TRADITIONAL FLUSH MOUNT ROUND CCT | 120V | 25 | 1750 | 70.0 | 30K/40K/50K | 80 | 15" | WHITE             | - |

## Cloud Flush Mount – Round Shade • Integrated LED • Dimmable • 50,000 Hour Rated Life



|             |                             |      |    |      |      |             |    |     |       |   |
|-------------|-----------------------------|------|----|------|------|-------------|----|-----|-------|---|
| CFMRD8DCCT  | CLOUD FLUSH MOUNT ROUND CCT | 120V | 10 | 700  | 70.0 | 30K/40K/50K | 80 | 8"  | WHITE | - |
| CFMRD11DCCT | CLOUD FLUSH MOUNT ROUND CCT | 120V | 15 | 1050 | 70.0 | 30K/40K/50K | 80 | 11" | WHITE | - |
| CFMRD13DCCT | CLOUD FLUSH MOUNT ROUND CCT | 120V | 20 | 1400 | 70.0 | 30K/40K/50K | 80 | 13" | WHITE | - |
| CFMRD15DCCT | CLOUD FLUSH MOUNT ROUND CCT | 120V | 25 | 1750 | 70.0 | 30K/40K/50K | 80 | 15" | WHITE | - |

# Flush Mount and Semi-Flush Mount Lighting

## Cloud Flush Mount – Square Shade • Integrated LED • 50,000 Hour Rated Life




| ITEM #      | DESCRIPTION                          | VOLTAGE | LAMP WATTS | LUMENS | LPW  | CCT                       | CRI | FIXTURE SIZE | FINISH | LAMP SHAPE |
|-------------|--------------------------------------|---------|------------|--------|------|---------------------------|-----|--------------|--------|------------|
| CFMSQ8DCCT  | CLOUD FLUSH MOUNT SQUARE 8" DIM CCT  | 120V    | 10         | 700    | 70.0 | 3000K/<br>4000K/<br>5000K | 80  | 8"           | WHITE  | -          |
| CFMSQ11DCCT | CLOUD FLUSH MOUNT SQUARE 11" DIM CCT | 120V    | 15         | 1050   | 70.0 | 3000K/<br>4000K/<br>5000K | 80  | 11"          | WHITE  | -          |
| CFMSQ13DCCT | CLOUD FLUSH MOUNT SQUARE 13" DIM CCT | 120V    | 20         | 1400   | 70.0 | 3000K/<br>4000K/<br>5000K | 80  | 13"          | WHITE  | -          |
| CFMSQ15DCCT | CLOUD FLUSH MOUNT SQUARE 15" DIM CCT | 120V    | 25         | 1750   | 70.0 | 3000K/<br>4000K/<br>5000K | 80  | 15"          | WHITE  | -          |

## Cloud Flush Mount – Rectangle Shade • Integrated LED • 50,000 Hour Rated Life



|               |                                        |      |    |      |      |                           |    |    |       |   |
|---------------|----------------------------------------|------|----|------|------|---------------------------|----|----|-------|---|
| CFMREC4FTDCCT | CLOUD FLUSH MOUNT RECTANGLE 4' DIM CCT | 120V | 35 | 2450 | 70.0 | 3000K/<br>4000K/<br>5000K | 80 | 4' | WHITE | - |
|---------------|----------------------------------------|------|----|------|------|---------------------------|----|----|-------|---|

## Vintage Flush Mount – E26 Base • 15,000 Hour Rated Life



|                |                                                |      |     |     |       |       |    |     |                          |      |
|----------------|------------------------------------------------|------|-----|-----|-------|-------|----|-----|--------------------------|------|
| VFMRD14WGD27K  | VINTAGE FLUSH MOUNT ROUND DIM 27K              | 120V | 4.5 | 450 | 100.0 | 2700K | 90 | 14" | WOOD GRAIN & BLACK METAL | ST19 |
| VSFMRD14BLD27K | VINTAGE SEMI-FLUSH MOUNT ROUND 14" BLK DIM 27K | 120V | 4.2 | 340 | 81.0  | 2700K | 90 | 14" | MATTE BLACK              | ST19 |
| VSFMRD14BND27K | VINTAGE SEMI-FLUSH MOUNT ROUND 14" BN DIM 27K  | 120V | 4.2 | 340 | 81.0  | 2700K | 90 | 14" | BRUSHED NICKEL           | ST19 |

## Classic Semi-Flush Mount – Round Shade • E26 Base • 50,000 Hour Rated Life



|                 |                                        |      |    |      |      |       |    |     |                |     |
|-----------------|----------------------------------------|------|----|------|------|-------|----|-----|----------------|-----|
| CLSFMRD15BND27K | CLASSIC SEMI-FLUSH MOUNT ROUND DIM 27K | 120V | 13 | 1100 | 84.6 | 2700K | 90 | 15" | BRUSHED NICKEL | A19 |
| CLSFMRD15BND30K | CLASSIC SEMI-FLUSH MOUNT ROUND DIM 30K | 120V | 13 | 1100 | 84.6 | 3000K | 90 | 15" | BRUSHED NICKEL | A19 |
| CLSFMRD15BND41K | CLASSIC SEMI-FLUSH MOUNT ROUND DIM 41K | 120V | 13 | 1100 | 84.6 | 4100K | 90 | 15" | BRUSHED NICKEL | A19 |
| CLSFMRD15BND50K | CLASSIC SEMI-FLUSH MOUNT ROUND DIM 50K | 120V | 13 | 1100 | 84.6 | 5000K | 90 | 15" | BRUSHED NICKEL | A19 |

## Vintage Semi-Flush Mount – Round Shade • E26 Base • 50,000 Hour Rated Life



|                 |                                        |      |     |     |       |       |    |    |                   |     |
|-----------------|----------------------------------------|------|-----|-----|-------|-------|----|----|-------------------|-----|
| VSFMRD8BLD27K   | VINTAGE SEMI-FLUSH MOUNT ROUND DIM 27K | 120V | 4.5 | 450 | 100.0 | 2700K | 95 | 8" | BLACK             | A19 |
| VSFMRD8BND27K   | VINTAGE SEMI-FLUSH MOUNT ROUND DIM 27K | 120V | 4.5 | 450 | 100.0 | 2700K | 95 | 8" | BRUSHED NICKEL    | A19 |
| VSFMRD8ORBND27K | VINTAGE SEMI-FLUSH MOUNT ROUND DIM 27K | 120V | 4.5 | 450 | 100.0 | 2700K | 90 | 8" | OIL-RUBBED BRONZE | A19 |

# Flush Mount and Semi-Flush Mount Lighting

## Outdoor Flush Mount – Round Shade • Integrated LED • 50,000 Hour Rated Life




| ITEM #      | DESCRIPTION                       | VOLTAGE | LAMP WATTS | LUMENS | LPW  | CCT                       | CRI | FIXTURE SIZE | FINISH | LAMP SHAPE |
|-------------|-----------------------------------|---------|------------|--------|------|---------------------------|-----|--------------|--------|------------|
| OFMRDBLDCCT | OUTDOOR FLUSH MOUNT ROUND DIM CCT | 120V    | 15         | 1050   | 70.0 | 3000K/<br>4000K/<br>5000K | 80  | 10"          | BLACK  | -          |
| OFMRDWHDCCT | OUTDOOR FLUSH MOUNT ROUND DIM CCT | 120V    | 15         | 1050   | 70.0 | 3000K/<br>4000K/<br>5000K | 80  | 10"          | WHITE  | -          |

## Outdoor Flush Mount – Round Shade • Integrated LED • 50,000 Hour Rated Life



|                |                                   |      |    |      |      |                           |    |     |                   |   |
|----------------|-----------------------------------|------|----|------|------|---------------------------|----|-----|-------------------|---|
| OFMRD11BNDCCT  | OUTDOOR FLUSH MOUNT ROUND DIM CCT | 120V | 24 | 1680 | 70.0 | 3000K/<br>4000K/<br>5000K | 80 | 11" | BRUSHED NICKEL    | - |
| OFMRD11ORBDCCT | OUTDOOR FLUSH MOUNT ROUND DIM CCT | 120V | 24 | 1680 | 70.0 | 3000K/<br>4000K/<br>5000K | 80 | 11" | OIL-RUBBED BRONZE | - |

## Outdoor Flush Mount – Round Shade • E26 Base • 50,000 Hour Rated Life



|            |                                    |      |    |     |      |       |    |    |       |     |
|------------|------------------------------------|------|----|-----|------|-------|----|----|-------|-----|
| OFMSQ8D30K | OUTDOOR FLUSH MOUNT SQUARE DIM 30K | 120V | 10 | 800 | 80.0 | 3000K | 90 | 8" | WHITE | A19 |
|------------|------------------------------------|------|----|-----|------|-------|----|----|-------|-----|

## Round Color Selectable LED Slim Flush Mount Light – Round Shade • 120° Beam Angle • 50,000 Hour Rated Life



|          |                                                                |      |    |                        |                  |                           |    |     |       |   |
|----------|----------------------------------------------------------------|------|----|------------------------|------------------|---------------------------|----|-----|-------|---|
| FMR07CCT | 7" ROUND DIMMABLE CCT SELECTABLE SLIM FLUSH MOUNT – 30/40/50K  | 120V | 15 | 930/<br>1045/<br>990   | 66/<br>72/<br>70 | 3000K/<br>4000K/<br>5000K | 80 | 7"  | WHITE | - |
| FMR09CCT | 9" ROUND DIMMABLE CCT SELECTABLE SLIM FLUSH MOUNT – 30/40/50K  | 120V | 18 | 1185/<br>1364/<br>1260 | 69/<br>76/<br>73 | 3000K/<br>4000K/<br>5000K | 80 | 9"  | WHITE | - |
| FMR12CCT | 12" ROUND DIMMABLE CCT SELECTABLE SLIM FLUSH MOUNT – 30/40/50K | 120V | 24 | 1770/<br>2030/<br>1880 | 77/<br>85/<br>82 | 3000K/<br>4000K/<br>5000K | 80 | 12" | WHITE | - |


## 9" Round LED Slim Flush Mount Light w/ Battery Backup – Round Shade • 120° Beam Angle • 50,000 Hour Rated Life



|             |                                                             |      |    |      |    |       |    |    |       |   |
|-------------|-------------------------------------------------------------|------|----|------|----|-------|----|----|-------|---|
| FMR0930KBBU | 9" ROUND DIMMABLE SLIM FLUSH MOUNT W/BATTERY BACKUP – 3000K | 120V | 18 | 1185 | 69 | 3000K | 80 | 9" | WHITE | - |
|-------------|-------------------------------------------------------------|------|----|------|----|-------|----|----|-------|---|

# Flush Mount and Semi-Flush Mount Lighting

| ITEM # | DESCRIPTION | LAMP VOLTAGE | LAMP WATTS | LUMENS | LPW | CCT | CRI | FITTURE SIZE | FINISH | LAMP SHAPE |
|--------|-------------|--------------|------------|--------|-----|-----|-----|--------------|--------|------------|
|        |             |              |            |        |     |     |     |              |        |            |



|          |                                                               |      |    |                        |                        |                           |    |     |       |   |
|----------|---------------------------------------------------------------|------|----|------------------------|------------------------|---------------------------|----|-----|-------|---|
| FMS07CCT | SQUARE DIMMABLE CCT SELECTABLE SLIM FLUSH MOUNT – 30K/40K/50K | 120V | 12 | 813/<br>861/<br>800    | 67.8/<br>71.8/<br>66.7 | 3000K/<br>4000K/<br>5000K | 80 | 7"  | WHITE | - |
| FMS09CCT | SQUARE DIMMABLE CCT SELECTABLE SLIM FLUSH MOUNT – 30K/40K/50K | 120V | 18 | 1299/<br>1422/<br>1272 | 72.2/<br>79/<br>70.7   | 3000K/<br>4000K/<br>5000K | 80 | 9"  | WHITE | - |
| FMS12CCT | SQUARE DIMMABLE CCT SELECTABLE SLIM FLUSH MOUNT – 30K/40K/50K | 120V | 24 | 1978/<br>2163/<br>1952 | 82.4/<br>90.1/<br>81.3 | 3000K/<br>4000K/<br>5000K | 80 | 12" | WHITE | - |

## Slim Flush Mount Accessories


### Round LED Slim Flush Mount Accessories

- FMR07CHR** – 7" Chrome Round Trim
- FMR07NIC** – 7" Satin Nickel Round Trim
- FMR07BLA** – 7" Matte Black Round Trim
- FMR09CHR** – 9" Chrome Round Trim
- FMR09NIC** – 9" Satin Nickel Round Trim
- FMR09BLA** – 9" Matte Black Round Trim
- FMR12CHR** – 12" Chrome Round Trim
- FMR12NIC** – 12" Satin Nickel Round Trim
- FMR12BLA** – 12" Matte Black Round Trim
- FMRETROKIT** – Retrofit Kit for 5"/6" Can Installation, All Round Sizes

### Square LED Slim Flush Mount Accessories

- FMS07CHR** – 7" Chrome Square Trim
- FMS07NIC** – 7" Satin Nickel Square Trim
- FMS07BLA** – 7" Matte Black Square Trim
- FMS09CHR** – 9" Chrome Square Trim
- FMS09NIC** – 9" Satin Nickel Square Trim
- FMS09BLA** – 9" Matte Black Square Trim
- FMS12CHR** – 12" Chrome Square Trim
- FMS12NIC** – 12" Satin Nickel Square Trim
- FMS12BLA** – 12" Matte Black Square Trim
- FMRETROFITSQ** – Retrofit kit for 5"/6" Can, All Square Sizes

# LED Round Pendant

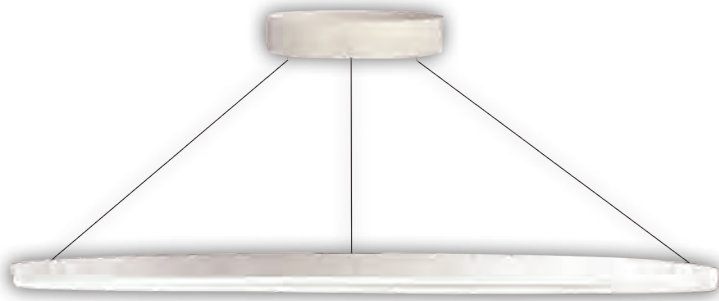

TCP's LED Round Pendant Luminaires feature a slim, low-profile design with full panel diffusion and superior uniformity. The designer grade fixture provides exceptional light output.

## Features & Benefits

- Up to 51% more energy efficient than fluorescent alternatives
- Excellent color consistency and CRI
- Mercury-free construction
- Slim low-profile design
- Pendant Mount Luminaire
- Hanging length is adjustable from 12" – 54"
- Utilizes edge-lit technology

## Specifications

Color Temperatures ..... 3000K, 4100K, 5000K  
 Input Line Voltage ..... 120-277 VAC  
 Input Line Frequency (Hz) ..... 50/60Hz  
 Minimum Starting Temperature ..... -20°C (-8°F)  
 Maximum Operating Temperature ..... 40°C (113°F)

| ITEM #                                                                                  | DESCRIPTION                                | VOLTAGE | WATTAGE | LUMENS | LPW | CCT   | CRI |
|-----------------------------------------------------------------------------------------|--------------------------------------------|---------|---------|--------|-----|-------|-----|
| <b>24" Round LED Pendant Mount Luminaire – 120° Beam Angle • 50,000 Hour Rated Life</b> |                                            |         |         |        |     |       |     |
| RPD24UZD3630K                                                                           | 24" ROUND DIMMABLE PENDANT LUMINAIRE – 30K | 120V    | 36      | 3600   | 100 | 3000K | 80  |
| RPD24UZD3641K                                                                           | 24" ROUND DIMMABLE PENDANT LUMINAIRE – 41K | 120V    | 36      | 3600   | 100 | 4100K | 80  |
| RPD24UZD3650K                                                                           | 24" ROUND DIMMABLE PENDANT LUMINAIRE – 50K | 120V    | 36      | 3600   | 100 | 5000K | 80  |

# Solistic LED Lamps


Solistic lighting technology is the closest artificial lighting available to natural light. This healthy light mimics natural sunlight and allows your body to maintain its natural biorhythms.



## Features & Benefits

- 1000 Lumens of powerful lighting
- 4000K Cool White color temperature
- Matte black finish
- Integrated dimming controls
- Supports your body's natural circadian rhythm

TCP Solistic Spectrum eliminates the typical LED Blue Light spike to mimic natural sunlight

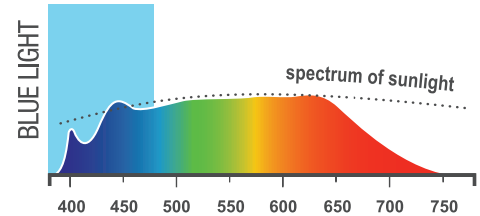

| ITEM # | DESCRIPTION | VOLTAGE | WATTAGE | LUMENS | LPW | CCT | CRI |
|--------|-------------|---------|---------|--------|-----|-----|-----|
|--------|-------------|---------|---------|--------|-----|-----|-----|

### Solistic Adjustable Table Lamp



|               |                                                        |          |    |      |      |       |    |
|---------------|--------------------------------------------------------|----------|----|------|------|-------|----|
| 555DLDIMBK40K | SOLISTIC LED ADJUSTABLE DIMMABLE BLACK DESK LAMP – 40K | 120-240V | 18 | 1000 | 55.6 | 4000K | 95 |
|---------------|--------------------------------------------------------|----------|----|------|------|-------|----|

|                 |                                                                  |          |    |      |      |       |    |
|-----------------|------------------------------------------------------------------|----------|----|------|------|-------|----|
| 555DLWCDIMBK40K | SOLISTIC LED ADJUSTABLE DIMMABLE BLACK DESK LAMP W/CHARGER – 40K | 120-240V | 18 | 1000 | 55.6 | 4000K | 95 |
|-----------------|------------------------------------------------------------------|----------|----|------|------|-------|----|

### Solistic Adjustable Floor Lamp



|                  |                                                         |          |    |      |      |       |    |
|------------------|---------------------------------------------------------|----------|----|------|------|-------|----|
| 555FLDIMREMBK40K | SOLISTIC LED ADJUSTABLE DIMMABLE BLACK TABLE LAMP – 40K | 120-240V | 14 | 1000 | 55.6 | 4000K | 95 |
|------------------|---------------------------------------------------------|----------|----|------|------|-------|----|

# Residential Security Lighting

Increase safety of residential and commercial spaces with TCP's Residential Security Lighting. These energy-efficient sconces provide long-lasting illumination for both residential and commercial applications such as walkways, entrances, stairwells, patios, driveways and storage areas.

## Features & Benefits

- Color Temperature: 5000K
- Black aluminum housing
- Clear plastic lens

## Specifications

|                                     |              |
|-------------------------------------|--------------|
| Color Temperatures .....            | 5000K        |
| Input Line Voltage.....             | 120V         |
| Input Line Frequency (Hz) .....     | 60Hz         |
| Minimum Starting Temperature.....   | -20°C (-4°F) |
| Maximum Operating Temperature ..... | 50°C (122°F) |

| ITEM # | DESCRIPTION | VOLTAGE | LAMP  |        |     |  | CCT | CRI |
|--------|-------------|---------|-------|--------|-----|--|-----|-----|
|        |             |         | WATTS | LUMENS | LPW |  |     |     |

### Residential Security Sconce – Integrated LED • 50,000 Rated Life



|               |                                                          |      |    |      |      |       |    |
|---------------|----------------------------------------------------------|------|----|------|------|-------|----|
| RSSCSQBL50KPC | RESIDENTIAL SECURITY SCONCE PHOTOCELL SQUARE BLK 50K     | 120V | 15 | 1050 | 70.0 | 5000K | 80 |
| RSSCSQBL50KMS | RESIDENTIAL SECURITY SCONCE MOTION SENSOR SQUARE BLK 50K | 120V | 15 | 1050 | 70.0 | 5000K | 90 |

### Residential Security Sconce – Integrated LED • 50,000 Rated Life



|            |                                                          |           |    |      |       |       |    |
|------------|----------------------------------------------------------|-----------|----|------|-------|-------|----|
| RSSCCBRZCW | RESIDENTIAL SECURITY SCONCE CYLINDER BRZ SELF-DIAGNOSTIC | 120V-277V | 12 | 1286 | 107.2 | 5000K | 90 |
|------------|----------------------------------------------------------|-----------|----|------|-------|-------|----|

# Under Cabinet Lighting

The Under Cabinet Color Selectable LED Light provides task or accent lighting in commercial, retail, hospitality and residential applications. Ideal for use under and over cabinets, display cases, task lighting, office lighting, coves and utility/work areas.

## Features & Benefits

- Color selectable: 3000K/4000K/5000K
- Integrated LED design
- Seamless connection
- Easy installation
- No flickering, no dark shadows
- 0.8mm aluminum housing for excellent heat dissipation
- Included 5' power cord, 10" connector cable, small connector and screws
- ETL approved for damp locations
- Linkable design



| ITEM #                                                                  | DESCRIPTION                 | VOLTAGE | LAMP WATTS | LUMENS | LPW   | CCT                       | CRI |
|-------------------------------------------------------------------------|-----------------------------|---------|------------|--------|-------|---------------------------|-----|
| <b>Residential Security Sconce – Integrated LED • 50,000 Rated Life</b> |                             |         |            |        |       |                           |     |
| CAB15UCCT                                                               | LED UNDER CABINET 15" LIGHT | 120V    | 4          | 480    | 120.0 | 3000K/<br>4000K/<br>5000K | 80  |
| CAB24UCCT                                                               | LED UNDER CABINET 24" LIGHT | 120V    | 7          | 840    | 120.0 | 3000K/<br>4000K/<br>5000K | 80  |
| CAB36UCCT                                                               | LED UNDER CABINET 36" LIGHT | 120V    | 12         | 1440   | 120.0 | 3000K/<br>4000K/<br>5000K | 80  |

## Connector Cable (included)



# Accents Pendant Lights



TCP Accents Pendant lights are available in a variety of shapes and contemporary finishes including black, gold and silver to beautifully complement any room. The 3.5-watt, 2400K or 3000K LED light casts a warm, inviting glow to give you more design choices in adding ambiance to your space.

## Features & Benefits

- 3 Styles: Mesh, Rail or Spiral
- 2 Shapes: Round or Cylinder
- 3 Finishes: Black, Silver or Gold

## Specifications

|                              |              |
|------------------------------|--------------|
| Wattage .....                | 3.5          |
| Color Temperatures .....     | 2400K, 3000K |
| Voltage .....                | 120V         |
| Minimum Starting Temp .....  | -22°C/-8°F   |
| Maximum Operating Temp ..... | 45°C/113°F   |
| CRI .....                    | 80           |
| Base .....                   | E26          |
| Warranty .....               | 3 Years      |

| ITEM #                                                | DESCRIPTION | CCT | LUMENS | STYLE | SHAPE | COLOR |
|-------------------------------------------------------|-------------|-----|--------|-------|-------|-------|
| <b>Mesh Round Pendants – Pillar Models • E26 Base</b> |             |     |        |       |       |       |



|             |                                                    |       |     |      |       |        |
|-------------|----------------------------------------------------|-------|-----|------|-------|--------|
| ACBPRMBD24K | ACCENTS MESH ROUND CAGE PILLAR BLACK DIMMABLE 24K  | 2400K | 120 | MESH | ROUND | BLACK  |
| ACBPRMSD24K | ACCENTS MESH ROUND CAGE PILLAR SILVER DIMMABLE 24K | 2400K | 180 | MESH | ROUND | SILVER |
| ACBPRMGD24K | ACCENTS MESH ROUND CAGE PILLAR GOLD DIMMABLE 24K   | 2400K | 160 | MESH | ROUND | GOLD   |
| ACBPRMBD30K | ACCENTS MESH ROUND CAGE PILLAR BLACK DIMMABLE 30K  | 3000K | 140 | MESH | ROUND | BLACK  |
| ACBPRMSD30K | ACCENTS MESH ROUND CAGE PILLAR SILVER DIMMABLE 30K | 3000K | 210 | MESH | ROUND | SILVER |
| ACBPRMGD30K | ACCENTS MESH ROUND CAGE PILLAR GOLD DIMMABLE 30K   | 3000K | 195 | MESH | ROUND | GOLD   |

| ITEM #                                                   | DESCRIPTION | CCT | LUMENS | STYLE | SHAPE | COLOR |
|----------------------------------------------------------|-------------|-----|--------|-------|-------|-------|
| <b>Mesh Cylinder Pendants – Pillar Models • E26 Base</b> |             |     |        |       |       |       |



|             |                                                       |       |     |      |          |        |
|-------------|-------------------------------------------------------|-------|-----|------|----------|--------|
| ACBPCMBD24K | ACCENTS MESH CYLINDER CAGE PILLAR BLACK DIMMABLE 24K  | 2400K | 120 | MESH | CYLINDER | BLACK  |
| ACBPCMSD24K | ACCENTS MESH CYLINDER CAGE PILLAR SILVER DIMMABLE 24K | 2400K | 180 | MESH | CYLINDER | SILVER |
| ACBPCMGD24K | ACCENTS MESH CYLINDER CAGE PILLAR GOLD DIMMABLE 24K   | 2400K | 160 | MESH | CYLINDER | GOLD   |
| ACBPCMBD30K | ACCENTS MESH CYLINDER CAGE PILLAR BLACK DIMMABLE 30K  | 3000K | 150 | MESH | CYLINDER | BLACK  |
| ACBPRCSD30K | ACCENTS RAIL ROUND CAGE PILLAR SILVER DIMMABLE 30K    | 3000K | 210 | MESH | CYLINDER | SILVER |
| ACBPRCGD30K | ACCENTS RAIL ROUND CAGE PILLAR GOLD DIMMABLE 30K      | 3000K | 195 | MESH | CYLINDER | GOLD   |

# Accents Pendant Lights

## Rail Round Pendants – Pillar Models • E26 Base



| ITEM #      | DESCRIPTION                                        | CCT   | LUMENS | STYLE | SHAPE | COLOR  |
|-------------|----------------------------------------------------|-------|--------|-------|-------|--------|
| ACBPRCBD24K | ACCENTS RAIL ROUND CAGE PILLAR BLACK DIMMABLE 24K  | 2400K | 120    | RAIL  | ROUND | BLACK  |
| ACBPRCSD24K | ACCENTS RAIL ROUND CAGE PILLAR SILVER DIMMABLE 24K | 2400K | 150    | RAIL  | ROUND | SILVER |
| ACBPRCGD24K | ACCENTS RAIL ROUND CAGE PILLAR GOLD DIMMABLE 24K   | 2400K | 150    | RAIL  | ROUND | GOLD   |
| ACBPRCBD30K | ACCENTS RAIL ROUND CAGE PILLAR BLACK DIMMABLE 30K  | 3000K | 140    | RAIL  | ROUND | BLACK  |
| ACBPRCSD30K | ACCENTS RAIL ROUND CAGE PILLAR SILVER DIMMABLE 30K | 3000K | 215    | RAIL  | ROUND | SILVER |
| ACBPRCGD30K | ACCENTS RAIL ROUND CAGE PILLAR GOLD DIMMABLE 30K   | 3000K | 195    | RAIL  | ROUND | GOLD   |

## Rail Cylinder Pendants – Pillar Models • E26 Base



|             |                                                       |       |     |      |          |        |
|-------------|-------------------------------------------------------|-------|-----|------|----------|--------|
| ACBPCCBD24K | ACCENTS RAIL CYLINDER CAGE PILLAR BLACK DIMMABLE 24K  | 2400K | 140 | RAIL | CYLINDER | BLACK  |
| ACBPCCSD24K | ACCENTS RAIL CYLINDER CAGE PILLAR SILVER DIMMABLE 24K | 2400K | 170 | RAIL | CYLINDER | SILVER |
| ACBPCCGD24K | ACCENTS RAIL CYLINDER CAGE PILLAR GOLD DIMMABLE 24K   | 2400K | 170 | RAIL | CYLINDER | GOLD   |
| ACBPCCBD30K | ACCENTS RAIL CYLINDER CAGE PILLAR BLACK DIMMABLE 30K  | 3000K | 160 | RAIL | CYLINDER | BLACK  |
| ACBPCCSD30K | ACCENTS RAIL CYLINDER CAGE PILLAR SILVER DIMMABLE 30K | 3000K | 210 | RAIL | CYLINDER | SILVER |
| ACBPCCGD30K | ACCENTS RAIL CYLINDER CAGE PILLAR GOLD DIMMABLE 30K   | 3000K | 210 | RAIL | CYLINDER | GOLD   |

## Spiral Round Pendants – Pillar Models • E26 Base



|             |                                                          |       |     |        |       |       |
|-------------|----------------------------------------------------------|-------|-----|--------|-------|-------|
| ACBPSRBD24K | ACCENTS RAIL SPIRAL ROUND CAGE PILLAR BLACK DIMMABLE 24K | 2400K | 120 | SPIRAL | ROUND | BLACK |
| ACBPSRBD30K | ACCENTS RAIL SPIRAL ROUND CAGE PILLAR BLACK DIMMABLE 30K | 3000K | 150 | SPIRAL | ROUND | BLACK |

## Replacement Pillars – E26 Base






| ITEM #      | DESCRIPTION                             | CCT   | LUMENS | COLOR  |
|-------------|-----------------------------------------|-------|--------|--------|
| ACBPBD24K   | ACCENTS CAGE BULB PILLAR BLACK DIM 24K  | 2400K | 180    | BLACK  |
| ACBPRCSD24K | ACCENTS CAGE BULB PILLAR SILVER DIM 24K | 2400K | 180    | SILVER |
| ACBPRCGD24K | ACCENTS CAGE BULB PILLAR GOLD DIM 24K   | 2400K | 180    | GOLD   |
| ACBPBD30K   | ACCENTS CAGE BULB PILLAR BLACK DIM 30K  | 3000K | 140    | BLACK  |
| ACBPRCSD30K | ACCENTS CAGE BULB PILLAR GOLD DIM 24K   | 3000K | 215    | SILVER |
| ACBPRCGD30K | ACCENTS CAGE BULB PILLAR GOLD DIM 30K   | 3000K | 195    | GOLD   |

# Commercial Downlights

TCP's Selectable Commercial Recessed Downlights provide choices for color temperatures and wattages, allowing each downlight to adapt to fit a variety of needs.

## In this section:

|                                                        |              |
|--------------------------------------------------------|--------------|
| LED CCT/Wattage Selectable Commercial Downlights ..... | <b>58-59</b> |
| Commercial Downlight Emergency Backup .....            | <b>60</b>    |

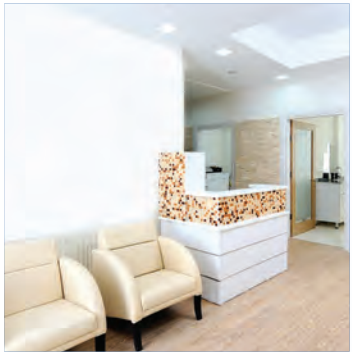

# LED CCT/Wattage Selectable Commercial Downlights


TCP's Selectable Commercial Recessed Downlights are designed with adaptability in mind to fulfill every lighting need. The Lens and Diffuser models feature wattage and CCT selectability to allow maximum flexibility. For situations that need more light, the High Lumen Output models are designed to maximize efficiency.



## Features & Benefits

- 3 Selectable Wattages
- Lens & Diffuser models offer 5 Selectable Colors (30K/35K/41K) (27K/50K)
- High Lumen Output models are fixed CCT
- Lens Version provides 10% more delivered lumens
- Flicker-free design for consistent lighting
- Mounts directly into the ceiling
- Available in Matte Silver and White (Diffuser models only)

## Diffuser vs. Lens Comparison

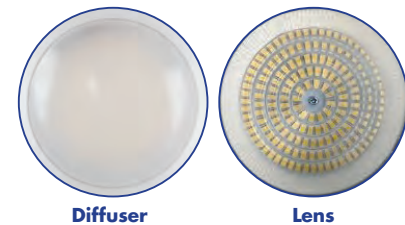

| 3000K/3500K/4100K MODELS                                                                                         |                                                      |          |           | LUMENS         |       |       |                |       |       |                 |       |       |                                                                      |     |
|------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|----------|-----------|----------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|----------------------------------------------------------------------|-----|
| ITEM #                                                                                                           | DESCRIPTION                                          | VOLTAGE  | LED WATTS | LOWEST WATTAGE |       |       | MIDDLE WATTAGE |       |       | HIGHEST WATTAGE |       |       | LPW                                                                  | CRI |
|                                                                                                                  |                                                      |          |           | 3000K          | 3500K | 4100K | 3000K          | 3500K | 4100K | 3000K           | 3500K | 4100K |                                                                      |     |
| <b>4" LED CCT/Wattage Selectable Commercial Downlight – Dimmable • 85° Beam Angle • 50,000 Hours Rated Life</b>  |                                                      |          |           |                |       |       |                |       |       |                 |       |       |                                                                      |     |
| DLC4SWUZLCCT                                                                                                     | 4" SELECTABLE COMMERCIAL DOWNLIGHT LENS VERSION      | 120-277V | 7/9/12    | 743            | 765   | 759   | 957            | 990   | 985   | 1265            | 1320  | 1309  | LW:106.1/109.2/108.4<br>MW:106.3/110/109.4<br>HW:105.4/110/109.1     | 80  |
| DLC4SWUZDCCT                                                                                                     | 4" SELECTABLE COMMERCIAL DOWNLIGHT DIFFUSER VERSION  | 120-277V | 7/9/12    | 675            | 695   | 690   | 870            | 900   | 895   | 1150            | 1200  | 1190  | LW:96.4/99.3/98.6<br>MW:96.7/100/99.4<br>HW:95.8/100/99              | 80  |
| <b>6" LED CCT/Wattage Selectable Commercial Downlight – Dimmable • 85° Beam Angle • 50,000 Hours Rated Life</b>  |                                                      |          |           |                |       |       |                |       |       |                 |       |       |                                                                      |     |
| DLC6SWUZLCCT                                                                                                     | 6" SELECTABLE COMMERCIAL DOWNLIGHT LENS VERSION      | 120-277V | 8/10/15   | 902            | 935   | 952   | 1133           | 1188  | 1205  | 1573            | 1683  | 1667  | LW:112.8/116.9/118.9<br>MW:113.3/118.8/120.5<br>HW:104.9/112.2/111.1 | 80  |
| DLC6SWUZDCCT                                                                                                     | 6" SELECTABLE COMMERCIAL DOWNLIGHT DIFFUSER VERSION  | 120-277V | 8/10/15   | 820            | 850   | 865   | 1030           | 1080  | 1095  | 1430            | 1530  | 1515  | LW:103/106/108<br>MW:103/108/110<br>HW:95/102/101                    | 80  |
| <b>8" LED CCT/Wattage Selectable Commercial Downlight – Dimmable • 85° Beam Angle • 50,000 Hours Rated Life</b>  |                                                      |          |           |                |       |       |                |       |       |                 |       |       |                                                                      |     |
| DLC8SWUZLCCT                                                                                                     | 8" SELECTABLE COMMERCIAL DOWNLIGHT LENS VERSION      | 120-277V | 11/15/19  | 1397           | 1430  | 1436  | 1892           | 1876  | 1953  | 2294            | 2365  | 2294  | LW:127/130/130.5<br>MW:126.1/125/130.2<br>HW:120.7/124.5/120.7       | 80  |
| DLC8SWUZDCCT                                                                                                     | 8" SELECTABLE COMMERCIAL DOWNLIGHT DIFFUSER VERSION  | 120-277V | 11/15/19  | 1270           | 1300  | 1305  | 1720           | 1705  | 1775  | 2085            | 2150  | 2085  | LW:115.5/118.2/119<br>MW:115/113.7/118.3<br>HW:110/113.2/110         | 80  |
| <b>10" LED CCT/Wattage Selectable Commercial Downlight – Dimmable • 85° Beam Angle • 50,000 Hours Rated Life</b> |                                                      |          |           |                |       |       |                |       |       |                 |       |       |                                                                      |     |
| DLC10SWUZLCCT                                                                                                    | 10" SELECTABLE COMMERCIAL DOWNLIGHT LENS VERSION     | 120-277V | 18/23/30  | 2310           | 2365  | 2365  | 2849           | 2926  | 2926  | 3526            | 3663  | 3636  | LW:128/131.4/131.4<br>MW:123.9/127.2/127.2<br>HW:117.5/122.1/121.2   | 80  |
| DLC10SWUZDCCT                                                                                                    | 10" SELECTABLE COMMERCIAL DOWNLIGHT DIFFUSER VERSION | 120-277V | 18/23/30  | 2100           | 2150  | 2150  | 2590           | 2660  | 2660  | 3205            | 3330  | 3305  | LW:116.7/119.4/119.4<br>MW:112.6/115.7/115.7<br>HW:106.8/111/110.2   | 80  |
| <b>12" LED CCT/Wattage Selectable Commercial Downlight – Dimmable • 70° Beam Angle • 50,000 Hours Rated Life</b> |                                                      |          |           |                |       |       |                |       |       |                 |       |       |                                                                      |     |
| DLC12SWUZLCCT                                                                                                    | 12" SELECTABLE COMMERCIAL DOWNLIGHT LENS VERSION     | 120-277V | 18/23/30  | 2321           | 2376  | 2398  | 2915           | 2959  | 2959  | 3586            | 3718  | 3696  | LW:128.9/132/133.2<br>HW:119.5/123.9/123.2<br>MW:126.7/128.7/128.7   | 80  |
| DLC12SWUZDCCT                                                                                                    | 12" SELECTABLE COMMERCIAL DOWNLIGHT DIFFUSER VERSION | 120-277V | 18/23/30  | 2110           | 2160  | 2180  | 2650           | 2690  | 2690  | 3260            | 3380  | 3360  | LW:117.2/120/121.1<br>MW:115.2/117/117<br>HW:108.7/112.7/112         | 80  |

# LED CCT/Wattage Selectable Commercial Downlights

| 2700K/5000K MODELS                                                                                               |                                                      |          |           | LUMENS         |       |                |       |                 |       | LPW                                                | CRI |
|------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|----------|-----------|----------------|-------|----------------|-------|-----------------|-------|----------------------------------------------------|-----|
| ITEM #                                                                                                           | DESCRIPTION                                          | VOLTAGE  | LED WATTS | LOWEST WATTAGE |       | MIDDLE WATTAGE |       | HIGHEST WATTAGE |       |                                                    |     |
|                                                                                                                  |                                                      |          |           | 2700K          | 5000K | 2700K          | 5000K | 2700K           | 5000K |                                                    |     |
| <b>4" LED CCT/Wattage Selectable Commercial Downlight – Dimmable • 85° Beam Angle • 50,000 Hours Rated Life</b>  |                                                      |          |           |                |       |                |       |                 |       |                                                    |     |
| DLC4SWUZDLCCT2                                                                                                   | 4" SELECTABLE COMMERCIAL DOWNLIGHT LENS VERSION      | 120-277V | 7/9/12    | 700            | 750   | 900            | 950   | 1250            | 1300  | LW:100/107.1<br>MW:100/105.6<br>HW:104.2/108.3     | 80  |
| DLC4SWUZDCCT2                                                                                                    | 4" SELECTABLE COMMERCIAL DOWNLIGHT DIFFUSER VERSION  | 120-277V | 7/9/12    | 700            | 750   | 900            | 1000  | 1200            | 1300  | LW:100/107.1<br>MW:100/111.1<br>HW:100/108.3       | 80  |
| <b>6" LED CCT/Wattage Selectable Commercial Downlight – Dimmable • 85° Beam Angle • 50,000 Hours Rated Life</b>  |                                                      |          |           |                |       |                |       |                 |       |                                                    |     |
| DLC6SWUZDLCCT2                                                                                                   | 6" SELECTABLE COMMERCIAL DOWNLIGHT LENS VERSION      | 120-277V | 8/10/15   | 900            | 950   | 1200           | 1300  | 1600            | 1650  | LW:112.5/118.8<br>MW:120/130<br>HW:106.7/110       | 80  |
| DLC6SWUZDCCT2                                                                                                    | 6" SELECTABLE COMMERCIAL DOWNLIGHT DIFFUSER VERSION  | 120-277V | 8/10/15   | 700            | 750   | 1000           | 1050  | 1540            | 1500  | LW:100/93.8<br>MW:100/105<br>HW:96.7/100           | 80  |
| <b>8" LED CCT/Wattage Selectable Commercial Downlight – Dimmable • 85° Beam Angle • 50,000 Hours Rated Life</b>  |                                                      |          |           |                |       |                |       |                 |       |                                                    |     |
| DLC8SWUZDLCCT2                                                                                                   | 8" SELECTABLE COMMERCIAL DOWNLIGHT LENS VERSION      | 120-277V | 11/15/19  | 1400           | 1500  | 1800           | 1900  | 2300            | 2400  | LW:127.3/136.4<br>MW:120/126.7<br>HW:121/126.3     | 80  |
| DLC8SWUZDCCT2                                                                                                    | 8" SELECTABLE COMMERCIAL DOWNLIGHT DIFFUSER VERSION  | 120-277V | 11/15/19  | 1200           | 1300  | 1600           | 1650  | 2000            | 2050  | LW:109.1/118.2<br>MW:106.7/110<br>HW:105.3/107.9   | 80  |
| <b>10" LED CCT/Wattage Selectable Commercial Downlight – Dimmable • 85° Beam Angle • 50,000 Hours Rated Life</b> |                                                      |          |           |                |       |                |       |                 |       |                                                    |     |
| DLC10SWUZDLCCT2                                                                                                  | 10" SELECTABLE COMMERCIAL DOWNLIGHT LENS VERSION     | 120-277V | 18/23/30  | 1950           | 2150  | 2500           | 2650  | 3250            | 3500  | LW:108.3/119.4<br>MW:108.7/115.2<br>HW:108.3/116.7 | 80  |
| DLC10SWUZDCCT2                                                                                                   | 10" SELECTABLE COMMERCIAL DOWNLIGHT DIFFUSER VERSION | 120-277V | 18/23/30  | 1800           | 1850  | 2250           | 2300  | 2850            | 2950  | LW:100/102.8<br>MW:97.8/100<br>HW:95/98.3          | 80  |
| <b>12" LED CCT/Wattage Selectable Commercial Downlight – Dimmable • 70° Beam Angle • 50,000 Hours Rated Life</b> |                                                      |          |           |                |       |                |       |                 |       |                                                    |     |
| DLC12SWUZDLCCT2                                                                                                  | 12" SELECTABLE COMMERCIAL DOWNLIGHT LENS VERSION     | 120-277V | 18/23/30  | 1950           | 2150  | 2500           | 2700  | 3250            | 3500  | LW:108.3/119.4<br>MW:108.7/117.4<br>HW:108.3/116.7 | 80  |
| DLC12SWUZDCCT2                                                                                                   | 12" SELECTABLE COMMERCIAL DOWNLIGHT DIFFUSER VERSION | 120-277V | 18/23/30  | 1800           | 1850  | 2250           | 2300  | 2850            | 2950  | LW:100/102.8<br>MW:97.8/100<br>HW:95/98.3          | 80  |

| HIGH LUMEN OUTPUT MODELS                                                                                     |                                                                                               |          |           | LUMENS |      |      | LPW   |       |     | CCT   | CRI |
|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----------|-----------|--------|------|------|-------|-------|-----|-------|-----|
| ITEM #                                                                                                       | DESCRIPTION                                                                                   | VOLTAGE  | LED WATTS | 30W    | 40W  | 50W  | 30W   | 40W   | 50W |       |     |
| <b>10" LED Wattage Selectable Commercial Downlight – Dimmable • 70° Beam Angle • 50,000 Hours Rated Life</b> |                                                                                               |          |           |        |      |      |       |       |     |       |     |
| DLC10SWHZDL41K                                                                                               | ROUND COMMERCIAL DOWNLIGHT, HIGH OUTPUT LENS VERSION, 120-347V, 30/40/50W, 0-10V DIMMING, 41K | 120-347V | 30/40/50  | 3800   | 4900 | 5900 | 126.7 | 122.5 | 118 | 4100K | 80  |
| DLC10SWHZDL50K                                                                                               | ROUND COMMERCIAL DOWNLIGHT, HIGH OUTPUT LENS VERSION, 120-347V, 30/40/50W, 0-10V DIMMING, 50K | 120-347V | 30/40/50  | 3800   | 4900 | 5900 | 126.7 | 122.5 | 118 | 5000K | 80  |
| <b>12" LED Wattage Selectable Commercial Downlight – Dimmable • 70° Beam Angle • 50,000 Hours Rated Life</b> |                                                                                               |          |           |        |      |      |       |       |     |       |     |
| DLC12SWHZDL41K                                                                                               | ROUND COMMERCIAL DOWNLIGHT, HIGH OUTPUT LENS VERSION, 120-347V, 30/40/50W, 0-10V DIMMING, 41K | 120-347V | 30/40/50  | 3800   | 4900 | 5900 | 126.7 | 122.5 | 118 | 4100K | 80  |
| DLC12SWHZDL50K                                                                                               | ROUND COMMERCIAL DOWNLIGHT, HIGH OUTPUT LENS VERSION, 120-347V, 30/40/50W, 0-10V DIMMING, 50K | 120-347V | 30/40/50  | 3800   | 4900 | 5900 | 126.7 | 122.5 | 118 | 5000K | 80  |

# Commercial Downlight Emergency Backup

TCP offers an emergency backup for the Commercial Downlights.





| ITEM NUMBER    | DESCRIPTION                                                          | DIMENSIONS            |
|----------------|----------------------------------------------------------------------|-----------------------|
| EMBACKUPCOMDL1 | EMERGENCY BACKUP FOR 4" AND 6" SELECTABLE COMMERCIAL DOWNLIGHT       | 9.45" X 1.77" X 1.18" |
| EMBACKUPCOMDL2 | EMERGENCY BACKUP FOR 8", 10" AND 12" SELECTABLE COMMERCIAL DOWNLIGHT | 12.9" X 2.6" X 2.2"   |

# Residential Downlights

TCP's LED Residential Downlights are the perfect choice for remodeling and new construction projects. They provide a high-quality, energy-efficient lighting solution, as all downlights are dimmable, IC Rated, and easy to install. TCP's LED Residential Downlights offer the fit and function your customers need.

## In this section:

|                                                |    |
|------------------------------------------------|----|
| LED Color Selectable Snap-In Downlights .....  | 62 |
| LED Color Selectable Retrofit Downlights ..... | 63 |
| Allusion LED 5"/6" Recessed Downlights.....    | 63 |
| LED Junction Box Downlights.....               | 64 |

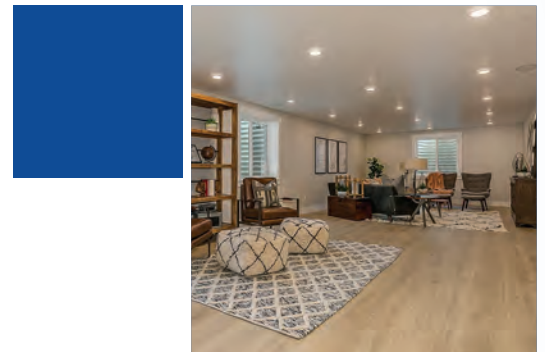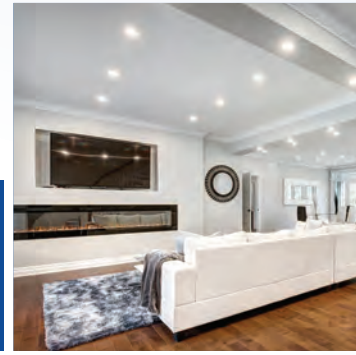


# LED Color Selectable Snap-In Downlights

TCP's LED Color Selectable Snap-In Downlights are the perfect choice for remodeling or new construction projects. The slim, energy-efficient design is easy to install and offers a rated lifetime of 50,000 hours.

## Features & Benefits

- Selectable CCT (27K/30K/35K) or (30K/40K/50K)
- Available in Edge-Lit and Backlit Models
- Direct wire - no recessed can required
- Slim design
- Highly efficient LEDs and driver
- UL approved for damp locations

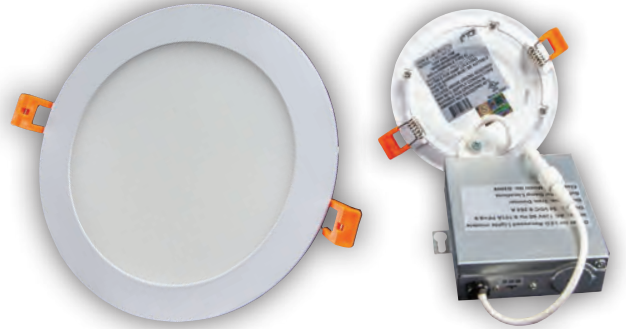

### EDGE-LIT MODELS

| ITEM #                                                                                         | DESCRIPTION                        | VOLTAGE | WATTS | LUMENS | LPW  | CCT               | BEAM ANGLE | CRI | CASE QTY |
|------------------------------------------------------------------------------------------------|------------------------------------|---------|-------|--------|------|-------------------|------------|-----|----------|
| <b>4" LED Color Selectable Edge-Lit Snap-In Downlight – Dimmable • 50,000 Hours Rated Life</b> |                                    |         |       |        |      |                   |            |     |          |
| L9EL4DCCT1                                                                                     | 4" EDGE-LIT SNAP-IN DOWNLIGHT CCT1 | 120V    | 10    | 850    | 85   | 2700K/3000K/3500K | 90         | 80  | 6        |
| L9EL4DCCT2                                                                                     | 4" EDGE-LIT SNAP-IN DOWNLIGHT CCT2 | 120V    | 10    | 850    | 85   | 3000K/4000K/5000K | 90         | 80  | 6        |
| <b>6" LED Color Selectable Edge-Lit Snap-In Downlight – Dimmable • 50,000 Hours Rated Life</b> |                                    |         |       |        |      |                   |            |     |          |
| L12EL6DCCT1                                                                                    | 6" EDGE-LIT SNAP-IN DOWNLIGHT CCT1 | 120V    | 14    | 1100   | 78.6 | 2700K/3000K/3500K | 100        | 80  | 6        |
| L12EL6DCCT2                                                                                    | 6" EDGE-LIT SNAP-IN DOWNLIGHT CCT2 | 120V    | 14    | 1100   | 78.6 | 3000K/4000K/5000K | 100        | 80  | 6        |

### BACKLIT MODELS


| ITEM #                                                                                              | DESCRIPTION                                  | VOLTAGE | WATTS | LUMENS | LPW  | CCT               | BEAM ANGLE | CRI | CASE QTY |
|-----------------------------------------------------------------------------------------------------|----------------------------------------------|---------|-------|--------|------|-------------------|------------|-----|----------|
| <b>4" LED Color Selectable Beveled Snap-In Downlight – Dimmable • 50,000 Hours Rated Life</b>       |                                              |         |       |        |      |                   |            |     |          |
| DR4BLVCCT1                                                                                          | 4" BEVELED FACE SNAP-IN DOWNLIGHT CCT1       | 120V    | 10    | 850    | 85   | 2700K/3000K/3500K | 90         | 80  | 6        |
| DR4BLVCCT2                                                                                          | 4" BEVELED FACE SNAP-IN DOWNLIGHT CCT2       | 120V    | 10    | 850    | 85   | 3000K/4000K/5000K | 90         | 80  | 6        |
| <b>6" LED Color Selectable Beveled Snap-In Downlight – Dimmable • 50,000 Hours Rated Life</b>       |                                              |         |       |        |      |                   |            |     |          |
| DR6BLVCCT1                                                                                          | 6" BEVELED FACE SNAP-IN DOWNLIGHT CCT1       | 120V    | 14    | 1100   | 78.6 | 2700K/3000K/3500K | 100        | 80  | 6        |
| DR6BLVCCT2                                                                                          | 6" BEVELED FACE SNAP-IN DOWNLIGHT CCT2       | 120V    | 14    | 1100   | 78.6 | 3000K/4000K/5000K | 100        | 80  | 6        |
| <b>4" LED Color Selectable Recessed Flat Snap-In Downlight – Dimmable • 50,000 Hours Rated Life</b> |                                              |         |       |        |      |                   |            |     |          |
| DR4BLCCT1                                                                                           | 4" RECESSED FLAT FACE SNAP-IN DOWNLIGHT CCT1 | 120V    | 10    | 850    | 85   | 2700K/3000K/3500K | 100        | 80  | 6        |
| DR4BLCCT2                                                                                           | 4" RECESSED FLAT FACE SNAP-IN DOWNLIGHT CCT2 | 120V    | 10    | 850    | 85   | 3000K/4000K/5000K | 100        | 80  | 6        |
| <b>6" LED Color Selectable Recessed Flat Snap-In Downlight – Dimmable • 50,000 Hours Rated Life</b> |                                              |         |       |        |      |                   |            |     |          |
| DR6BLCCT1                                                                                           | 6" RECESSED FLAT FACE SNAP-IN DOWNLIGHT CCT1 | 120V    | 14    | 1100   | 78.6 | 2700K/3000K/3500K | 110        | 80  | 6        |
| DR6BLCCT2                                                                                           | 6" RECESSED FLAT FACE SNAP-IN DOWNLIGHT CCT2 | 120V    | 14    | 1100   | 78.6 | 3000K/4000K/5000K | 110        | 80  | 6        |
| <b>8" LED Color Selectable Recessed Flat Snap-In Downlight – Dimmable • 50,000 Hours Rated Life</b> |                                              |         |       |        |      |                   |            |     |          |
| DR8BLCCT1                                                                                           | 8" RECESSED FLAT FACE SNAP-IN DOWNLIGHT CCT1 | 120V    | 18    | 1400   | 77.8 | 2700K/3000K/3500K | 110        | 80  | 6        |
| DR8BLCCT2                                                                                           | 8" RECESSED FLAT FACE SNAP-IN DOWNLIGHT CCT2 | 120V    | 18    | 1400   | 77.8 | 3000K/4000K/5000K | 110        | 80  | 6        |

# LED Color Selectable Retrofit Downlights

TCP's LED Color Selectable Retrofit Downlights are the perfect choice for remodeling or new construction projects.

## Features & Benefits

- Selectable CCT (27K/30K/35K) or (30K/40K/50K)
- Mounts directly to recessed can (4", 5", or 6") for easy installation with integrated trim, including pigtail and spring clips
- Slim design
- Available in damp and wet location rated models
- IC rated

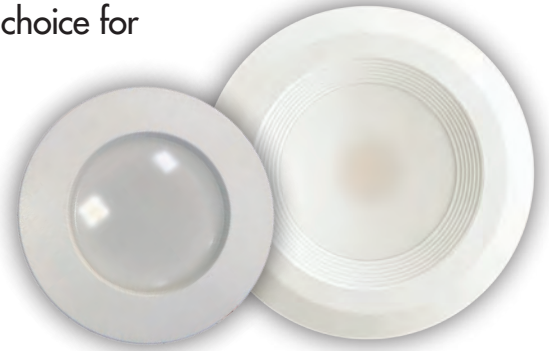

| ITEM #                                                                                                            | DESCRIPTION                                                              | VOLTAGE | WATTS | LUMENS | LPW  | CCT               | BEAM ANGLE | CRI | CASE QTY |
|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|---------|-------|--------|------|-------------------|------------|-----|----------|
| <b>4" LED Color Selectable Beveled Face Retrofit Downlight – Dimmable • 50,000 Hours Rated Life</b>               |                                                                          |         |       |        |      |                   |            |     |          |
| LEDDR4BVCCT1                                                                                                      | 4" BEVELED FACE RETROFIT DOWNLIGHT CCT1                                  | 120V    | 10.5  | 700    | 66.7 | 2700K/3000K/3500K | 100        | 80  | 6        |
| LEDDR4BVCCT2                                                                                                      | 4" BEVELED FACE RETROFIT DOWNLIGHT CCT2                                  | 120V    | 10.5  | 700    | 66.7 | 3000K/4000K/5000K | 100        | 80  | 6        |
| <b>5"/6" LED Color Selectable Beveled Face Retrofit Downlight – Dimmable • 50,000 Hours Rated Life</b>            |                                                                          |         |       |        |      |                   |            |     |          |
| LDR56BVCCT1                                                                                                       | 5"/6" BEVELED FACE RETROFIT DOWNLIGHT CCT1                               | 120V    | 16W   | 1400   | 87.5 | 2700K/3000K/3500K | 90         | 80  | 6        |
| LDR56BVCCT2                                                                                                       | 5"/6" BEVELED FACE RETROFIT DOWNLIGHT CCT2                               | 120V    | 16W   | 1400   | 87.5 | 3000K/4000K/5000K | 90         | 80  | 6        |
| <b>4" LED Color Selectable Recessed Flat Face Retrofit Downlight – Dimmable • 50,000 Hours Rated Life</b>         |                                                                          |         |       |        |      |                   |            |     |          |
| LEDDR4FLCCT1                                                                                                      | 4" RECESSED FLAT FACE RETROFIT DOWNLIGHT CCT1                            | 120V    | 11    | 850    | 74   | 2700K/3000K/3500K | 100        | 80  | 6        |
| LEDDR4FLCCT2                                                                                                      | 4" RECESSED FLAT FACE RETROFIT DOWNLIGHT CCT2                            | 120V    | 11    | 850    | 74   | 3000K/4000K/5000K | 100        | 80  | 6        |
| <b>5"/6" LED Color Selectable Recessed Flat Face Retrofit Downlight – Dimmable • 50,000 Hours Rated Life</b>      |                                                                          |         |       |        |      |                   |            |     |          |
| LDR56FLCCT1                                                                                                       | 5"/6" RECESSED FLAT FACE RETROFIT DOWNLIGHT CCT1                         | 120V    | 16W   | 1400   | 87.5 | 2700K/3000K/3500K | 100        | 80  | 6        |
| LDR56FLCCT2                                                                                                       | 5"/6" RECESSED FLAT FACE RETROFIT DOWNLIGHT CCT2                         | 120V    | 16W   | 1400   | 87.5 | 3000K/4000K/5000K | 100        | 80  | 6        |
| <b>5"/6" Deep Recessed Flat Face Retrofit Downlight – Dimmable • Wet Location Rated • 50,000 Hours Rated Life</b> |                                                                          |         |       |        |      |                   |            |     |          |
| LDR56WETCCT2                                                                                                      | 5"/6" DEEP RECESSED FLAT FACE RETROFIT DOWNLIGHT CCT2 WET LOCATION RATED | 120V    | 16W   | 1400   | 87.5 | 3000K/4000K/5000K | 90         | 80  | 6        |

# Allusion LED 5"/6" Recessed Downlights

TCP's Allusion LED Downlights provide a beautiful "incandescent-like" smooth, warm dimming ambiance. The LEDs are constructed with a unique dimming profile that replicates true incandescent/halogen dimming.

## Features & Benefits

- Energy efficient: Up to 85% more efficient than incandescent/halogen replacements
- Long life: 25,000 hours
- Similar look and feel as incandescent alternative
- Approved for damp locations



| ITEM #                                                                                        | DESCRIPTION                  | VOLTAGE | WATTS | LUMENS | LPW | CCT            | BEAM ANGLE | CRI | CASE QTY |
|-----------------------------------------------------------------------------------------------|------------------------------|---------|-------|--------|-----|----------------|------------|-----|----------|
| <b>ALLUSION LED 5"/6" Recessed Downlights – Smooth Warm Dimming • 25,000 Hours Rated Life</b> |                              |         |       |        |     |                |            |     |          |
| LED10DR56DA                                                                                   | LED 5"/6" RECESSED DOWNLIGHT | 120V    | 11    | 1100   | 100 | 3000K TO 2000K | 120        | 80  | 6        |

# LED Junction Box Downlights

TCP's LED Dimmable Downlights easily attach to a standard junction box, eliminating the need for a recessed can. Offering multiple color temperatures, triac dimming, and rated for wet locations, this downlight provides the perfect solution for a variety of surface-mount applications.



## Features & Benefits

- Available in single color and CCT Selectable
- Frosted cover
- Junction box mounting, retrofit or snap-in models available
- Available in 4" and 6" sizes
- Wide beam spread
- Triac dimming

## JUNCTION BOX MODELS

| ITEM #                                                                                          | DESCRIPTION                                         | VOLTAGE | WATTS | LUMENS | LPW  | CCT         | BEAM ANGLE | CRI | CASE QTY |
|-------------------------------------------------------------------------------------------------|-----------------------------------------------------|---------|-------|--------|------|-------------|------------|-----|----------|
| <b>4" Color Selectable Designer Junction Box Downlight – Dimmable • 50,000 Hours Rated Life</b> |                                                     |         |       |        |      |             |            |     |          |
| JDL41DCCT                                                                                       | 4" LED COLOR SELECT DESIGNER JUNCTION BOX DOWNLIGHT | 120V    | 10    | 700    | 70   | 30K/40K/50K | 110        | 90  | 6        |
| <b>6" Color Selectable Designer Junction Box Downlight – Dimmable • 50,000 Hours Rated Life</b> |                                                     |         |       |        |      |             |            |     |          |
| JDL61DCCT                                                                                       | 6" LED COLOR SELECT DESIGNER JUNCTION BOX DOWNLIGHT | 120V    | 13    | 900    | 69.2 | 30K/40K/50K | 110        | 90  | 6        |
| <b>4" Designer Junction Box Downlight – Dimmable • 50,000 Hours Rated Life</b>                  |                                                     |         |       |        |      |             |            |     |          |
| JDL41D30K                                                                                       | 4" LED DESIGNER JUNCTION BOX DOWNLIGHT              | 120V    | 10    | 700    | 70   | 3000K       | 110        | 90  | 6        |
| <b>6" Designer Junction Box Downlight – Dimmable • 50,000 Hours Rated Life</b>                  |                                                     |         |       |        |      |             |            |     |          |
| JDL61D30K                                                                                       | 6" LED DESIGNER JUNCTION BOX DOWNLIGHT              | 120V    | 13    | 900    | 69.2 | 3000K       | 110        | 90  | 6        |
| <b>6" Standard Junction Box Downlight – Dimmable • 50,000 Hours Rated Life</b>                  |                                                     |         |       |        |      |             |            |     |          |
| SDL61D27K                                                                                       | LED 6" DIMMABLE JUNCTION BOX DOWNLIGHT - 27K        | 120V    | 11    | 1100   | 100  | 2700K       | 110        | 80  | 6        |
| SDL61D30K                                                                                       | LED 6" DIMMABLE JUNCTION BOX DOWNLIGHT - 30K        | 120V    | 11    | 1100   | 100  | 3000K       | 110        | 80  | 6        |
| SDL61D41K                                                                                       | LED 6" DIMMABLE JUNCTION BOX DOWNLIGHT - 41K        | 120V    | 11    | 1100   | 100  | 4100K       | 110        | 80  | 6        |
| SDL61D50K                                                                                       | LED 6" DIMMABLE JUNCTION BOX DOWNLIGHT - 50K        | 120V    | 11    | 1100   | 100  | 5000K       | 110        | 80  | 6        |

## RETROFIT MODELS

| ITEM #                                                                                                   | DESCRIPTION                                                  | VOLTAGE | WATTS | LUMENS | LPW  | CCT               | BEAM ANGLE | CRI | CASE QTY |
|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|---------|-------|--------|------|-------------------|------------|-----|----------|
| <b>4" Color Selectable Designer Retrofit Junction Box Downlight – Dimmable • 50,000 Hours Rated Life</b> |                                                              |         |       |        |      |                   |            |     |          |
| JDL41DCCTRETRO                                                                                           | 4" LED COLOR SELECT DESIGNER RETROFIT JUNCTION BOX DOWNLIGHT | 120V    | 10    | 700    | 70   | 3000K/4000K/5000K | 110        | 90  | 6        |
| <b>6" Color Selectable Designer Retrofit Junction Box Downlight – Dimmable • 50,000 Hours Rated Life</b> |                                                              |         |       |        |      |                   |            |     |          |
| JDL61DCCTRETRO                                                                                           | 6" LED COLOR SELECT DESIGNER RETROFIT JUNCTION BOX DOWNLIGHT | 120V    | 13    | 900    | 69.2 | 3000K/4000K/5000K | 110        | 90  | 6        |

## SNAP-IN MODELS

| ITEM #                                                                                                  | DESCRIPTION                                                 | VOLTAGE | WATTS | LUMENS | LPW  | CCT               | BEAM ANGLE | CRI | CASE QTY |
|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------|-------|--------|------|-------------------|------------|-----|----------|
| <b>4" Color Selectable Designer Snap-In Junction Box Downlight – Dimmable • 50,000 Hours Rated Life</b> |                                                             |         |       |        |      |                   |            |     |          |
| JDL41DCCTSNP                                                                                            | 4" LED COLOR SELECT DESIGNER SNAP-IN JUNCTION BOX DOWNLIGHT | 120V    | 10    | 700    | 70   | 3000K/4000K/5000K | 110        | 90  | 6        |
| <b>6" Color Selectable Designer Snap-In Junction Box Downlight – Dimmable • 50,000 Hours Rated Life</b> |                                                             |         |       |        |      |                   |            |     |          |
| JDL61DCCTSNP                                                                                            | 6" LED COLOR SELECT DESIGNER SNAP-IN JUNCTION BOX DOWNLIGHT | 120V    | 13    | 900    | 69.2 | 3000K/4000K/5000K | 110        | 90  | 6        |




# LED T8 and T5 Tubes

TCP offers all types of LED T8 and T5 tubes as well as options for our Solistic, Pro Line and Smart technology. All are ideal for use in offices, restaurants, retail stores, lobbies, schools and hospitals. They are energy efficient and have a long life which minimizes the need for replacement and labor costs.

## In this section:

|                             |              |
|-----------------------------|--------------|
| LiberaT8 and T5 Tubes ..... | <b>66-68</b> |
| SelectT8 Tubes .....        | <b>69</b>    |
| DirectT8 and T5 Tubes.....  | <b>70-72</b> |
| Correlat8 Tubes .....       | <b>73</b>    |
| Pro Line Tubes .....        | <b>74</b>    |
| T8-Ready Fixtures .....     | <b>75-78</b> |
| Retrofit Kits .....         | <b>79</b>    |

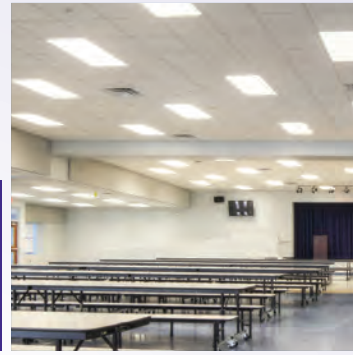

# LiberaT8 Tubes

TCP's LED T8 Type B tubes offer the perfect LED compatible replacement for linear fixtures that operate independently of ballasts.

## Features & Benefits

- Over 50% energy savings compared to fluorescent alternatives
- Single/Double Ended
- Shunted or non-shunted sockets
- UL rated for enclosed fixtures and damp locations
- No energy losses due to fluorescent ballast

## Specifications

Construction ..... Single/Double Ended  
 Safety ..... UL Classified and UL Component Listed  
 Listed ..... ETL Sanitation Listed to NSF Std. 2  
 Beam Angle ..... 190°  
 Field Angle ..... 300°  
 Environment ..... Damp/Dry Locations  
 Enclosed ..... Suitable for Enclosed Luminaires

| ITEM #                                                                                 | DESCRIPTION                              | LAMP WATTAGE | VOLTAGE  | FLUORESCENT EQUIV. | LUMENS | LPW   | BASE | CCT   | CRI | MASTER PACK |
|----------------------------------------------------------------------------------------|------------------------------------------|--------------|----------|--------------------|--------|-------|------|-------|-----|-------------|
| <b>13.5W T8 Ballast Bypass – 4 Foot All Glass Tubes • G13 Base</b>                     |                                          |              |          |                    |        |       |      |       |     |             |
| LT813B230K                                                                             | LED 13.5W BALLAST BYPASS - 30K           | 13.5         | 120-277V | 32                 | 1700   | 125.9 | G13  | 3000K | 80  | 25          |
| LT813B235K                                                                             | LED 13.5W BALLAST BYPASS - 35K           | 13.5         | 120-277V | 32                 | 1700   | 125.9 | G13  | 3500K | 80  | 25          |
| LT813B241K                                                                             | LED 13.5W BALLAST BYPASS - 41K           | 13.5         | 120-277V | 32                 | 1800   | 133.3 | G13  | 4100K | 80  | 25          |
| LT813B250K                                                                             | LED 13.5W BALLAST BYPASS - 50K           | 13.5         | 120-277V | 32                 | 1800   | 133.3 | G13  | 5000K | 80  | 25          |
| LT813B265K                                                                             | LED 13.5W BALLAST BYPASS - 65K           | 13.5         | 120-277V | 32                 | 1800   | 133.3 | G13  | 6500K | 80  | 25          |
| <b>10.5W T8 Ballast Bypass – 4 Foot All Glass Tubes • G13 Base</b>                     |                                          |              |          |                    |        |       |      |       |     |             |
| LT810B235K                                                                             | LED 10.5W BALLAST BYPASS - 35K           | 10.5         | 120-277V | 32                 | 1650   | 157.1 | G13  | 3500K | 80  | 25          |
| LT810B241K                                                                             | LED 10.5W BALLAST BYPASS - 41K           | 10.5         | 120-277V | 32                 | 1650   | 157.1 | G13  | 4100K | 80  | 25          |
| LT810B250K                                                                             | LED 10.5W BALLAST BYPASS - 50K           | 10.5         | 120-277V | 32                 | 1650   | 157.1 | G13  | 5000K | 80  | 25          |
| <b>5.5W T8 Ballast Bypass – 4 Foot All Glass Tubes • G13 Base</b>                      |                                          |              |          |                    |        |       |      |       |     |             |
| LT805B241K                                                                             | LED 5.5W BALLAST BYPASS - 41K            | 5.5          | 120-277V | 32                 | 900    | 163   | G13  | 4100K | 80  | 25          |
| LT805B250K                                                                             | LED 5.5W BALLAST BYPASS - 50K            | 5.5          | 120-277V | 32                 | 900    | 163   | G13  | 5000K | 80  | 25          |
| <b>13.5W T8 Ballast Bypass – 4 Foot Shatterproof PET Coated Glass Tubes • G13 Base</b> |                                          |              |          |                    |        |       |      |       |     |             |
| L13T8BY5030K                                                                           | LED 13.5W BALLAST BYPASS 4 FOOT T8 - 30K | 13.5         | 120-277V | 32                 | 1700   | 133.3 | G13  | 3000K | 80  | 25          |
| L13T8BY5035K                                                                           | LED 13.5W BALLAST BYPASS 4 FOOT T8 - 35K | 13.5         | 120-277V | 32                 | 1700   | 133.3 | G13  | 3500K | 80  | 25          |
| L13T8BY5041K                                                                           | LED 13.5W BALLAST BYPASS 4 FOOT T8 - 41K | 13.5         | 120-277V | 32                 | 1800   | 140.7 | G13  | 4100K | 80  | 25          |
| L13T8BY5050K                                                                           | LED 13.5W BALLAST BYPASS 4 FOOT T8 - 50K | 13.5         | 120-277V | 32                 | 1800   | 148.1 | G13  | 5000K | 80  | 25          |
| <b>12W T8 Ballast Bypass – 3 Foot Shatterproof PET Coated Glass Tubes • G13 Base</b>   |                                          |              |          |                    |        |       |      |       |     |             |
| L12T8BY5030K                                                                           | LED 12W BALLAST BYPASS 3 FOOT T8 - 30K   | 12           | 120-277V | 25                 | 1400   | 100   | G13  | 3000K | 80  | 25          |
| L12T8BY5035K                                                                           | LED 12W BALLAST BYPASS 3 FOOT T8 - 35K   | 12           | 120-277V | 25                 | 1400   | 100   | G13  | 3500K | 80  | 25          |
| L12T8BY5041K                                                                           | LED 12W BALLAST BYPASS 3 FOOT T8 - 41K   | 12           | 120-277V | 25                 | 1450   | 100   | G13  | 4100K | 80  | 25          |
| L12T8BY5050K                                                                           | LED 12W BALLAST BYPASS 3 FOOT T8 - 50K   | 12           | 120-277V | 25                 | 1450   | 100   | G13  | 5000K | 80  | 25          |
| <b>9W T8 Ballast Bypass – 2 Foot Shatterproof PET Coated Glass Tubes • G13 Base</b>    |                                          |              |          |                    |        |       |      |       |     |             |
| L9T8BY5030K                                                                            | LED 9W BALLAST BYPASS 2 FOOT T8 - 30K    | 9            | 120-277V | 17                 | 1100   | 125   | G13  | 3000K | 80  | 25          |
| L9T8BY5035K                                                                            | LED 9W BALLAST BYPASS 2 FOOT T8 - 35K    | 9            | 120-277V | 17                 | 1100   | 125   | G13  | 3500K | 80  | 25          |
| L9T8BY5041K                                                                            | LED 9W BALLAST BYPASS 2 FOOT T8 - 41K    | 9            | 120-277V | 17                 | 1150   | 133.3 | G13  | 4100K | 80  | 25          |
| L9T8BY5050K                                                                            | LED 9W BALLAST BYPASS 2 FOOT T8 - 50K    | 9            | 120-277V | 17                 | 1150   | 138.8 | G13  | 5000K | 80  | 25          |



# LiberaT8 Tubes

## 42W T8 Ballast Bypass – 8 Foot Glass Tubes • R17D Base



| ITEM #      | DESCRIPTION                             | LAMP WATTAGE | VOLTAGE  | FLUORESCENT EQUIV. | LUMENS | LPW   | BASE | CCT   | CRI | MASTER PACK |
|-------------|-----------------------------------------|--------------|----------|--------------------|--------|-------|------|-------|-----|-------------|
| IT8R43B230K | LED 42W BALLAST BYPASS, R17D BASE - 30K | 42           | 120-277V | 75                 | 5300   | 123.3 | R17D | 3000K | 80  | 10          |
| IT8R43B235K | LED 42W BALLAST BYPASS, R17D BASE - 35K | 42           | 120-277V | 75                 | 5300   | 123.3 | R17D | 3500K | 80  | 10          |
| IT8R43B240K | LED 42W BALLAST BYPASS, R17D BASE - 40K | 42           | 120-277V | 75                 | 5400   | 125.6 | R17D | 4000K | 80  | 10          |
| IT8R43B250K | LED 42W BALLAST BYPASS, R17D BASE - 50K | 42           | 120-277V | 75                 | 5500   | 127.9 | R17D | 5000K | 80  | 10          |
| IT8R43B265K | LED 42W BALLAST BYPASS, R17D BASE - 65K | 42           | 120-277V | 75                 | 5500   | 127.9 | R17D | 6500K | 80  | 10          |

## 42W T8 Ballast Bypass – 8 Foot Glass Tubes • FA8 Base



|             |                                        |    |          |    |      |       |     |       |    |    |
|-------------|----------------------------------------|----|----------|----|------|-------|-----|-------|----|----|
| IT8F43B230K | LED 42W BALLAST BYPASS, FA8 BASE - 30K | 42 | 120-277V | 75 | 5300 | 123.3 | FA8 | 3000K | 80 | 10 |
| IT8F43B235K | LED 42W BALLAST BYPASS, FA8 BASE - 35K | 42 | 120-277V | 75 | 5300 | 123.3 | FA8 | 3500K | 80 | 10 |
| IT8F43B240K | LED 42W BALLAST BYPASS, FA8 BASE - 40K | 42 | 120-277V | 75 | 5400 | 125.6 | FA8 | 4000K | 80 | 10 |
| IT8F43B250K | LED 42W BALLAST BYPASS, FA8 BASE - 50K | 42 | 120-277V | 75 | 5500 | 127.9 | FA8 | 5000K | 80 | 10 |
| IT8F43B265K | LED 42W BALLAST BYPASS, FA8 BASE - 65K | 42 | 120-277V | 75 | 5500 | 127.9 | FA8 | 6500K | 80 | 10 |

## 34W T8 Ballast Bypass – 8 Foot Glass Tubes • FA8 Base

|             |                                        |    |          |    |      |       |     |       |    |    |
|-------------|----------------------------------------|----|----------|----|------|-------|-----|-------|----|----|
| IT8F34B240K | LED 34W BALLAST BYPASS, FA8 BASE - 40K | 34 | 120-277V | 60 | 4400 | 129.4 | FA8 | 4000K | 80 | 10 |
| IT8F34B250K | LED 34W BALLAST BYPASS, FA8 BASE - 50K | 34 | 120-277V | 60 | 4400 | 129.4 | FA8 | 5000K | 80 | 10 |

## 15.5W T8 Ballast Bypass – 2 Foot Shatterproof U-Bend Plastic Tubes • G13 Base



|               |                                          |      |          |    |      |       |     |       |    |    |
|---------------|------------------------------------------|------|----------|----|------|-------|-----|-------|----|----|
| LPT8U615B230K | LED 15.5W BALLAST BYPASS U-BEND T8 - 30K | 15.5 | 120-277V | 32 | 2000 | 129   | G13 | 3000K | 80 | 25 |
| LPT8U615B235K | LED 15.5W BALLAST BYPASS U-BEND T8 - 35K | 15.5 | 120-277V | 32 | 2000 | 129   | G13 | 3500K | 80 | 25 |
| LPT8U615B241K | LED 15.5W BALLAST BYPASS U-BEND T8 - 41K | 15.5 | 120-277V | 32 | 2100 | 135.5 | G13 | 4100K | 80 | 25 |
| LPT8U615B250K | LED 15.5W BALLAST BYPASS U-BEND T8 - 50K | 15.5 | 120-277V | 32 | 2100 | 135.5 | G13 | 5000K | 80 | 25 |

## 24.5W T8 High Output Ballast Bypass – 4 Foot Shatterproof PET Coated Glass Tubes • G13 Base



|             |                                            |      |          |    |      |       |     |       |    |    |
|-------------|--------------------------------------------|------|----------|----|------|-------|-----|-------|----|----|
| LPT824B230K | LED 24.5W HIGH OUTPUT BALLAST BYPASS - 30K | 24.5 | 120-277V | 32 | 2850 | 116.3 | G13 | 3000K | 80 | 25 |
| LPT824B235K | LED 24.5W HIGH OUTPUT BALLAST BYPASS - 35K | 24.5 | 120-277V | 32 | 2850 | 116.3 | G13 | 3500K | 80 | 25 |
| LPT824B241K | LED 24.5W HIGH OUTPUT BALLAST BYPASS - 41K | 24.5 | 120-277V | 32 | 3000 | 122.4 | G13 | 4100K | 80 | 25 |
| LPT824B250K | LED 24.5W HIGH OUTPUT BALLAST BYPASS - 50K | 24.5 | 120-277V | 32 | 3000 | 122.4 | G13 | 5000K | 80 | 25 |

## 18.5W T8 High Output Ballast Bypass – 4 Foot Shatterproof PET Coated Glass Tubes • G13 Base

|             |                                          |      |          |    |      |       |     |       |    |    |
|-------------|------------------------------------------|------|----------|----|------|-------|-----|-------|----|----|
| LPT818B230K | LED 18.5W BALLAST BYPASS 4 FOOT T8 - 30K | 18.5 | 120-277V | 32 | 2450 | 132.4 | G13 | 3000K | 80 | 25 |
| LPT818B235K | LED 18.5W BALLAST BYPASS 4 FOOT T8 - 35K | 18.5 | 120-277V | 32 | 2450 | 132.4 | G13 | 3500K | 80 | 25 |
| LPT818B241K | LED 18.5W BALLAST BYPASS 4 FOOT T8 - 41K | 18.5 | 120-277V | 32 | 2600 | 140.5 | G13 | 4100K | 80 | 25 |
| LPT818B250K | LED 18.5W BALLAST BYPASS 4 FOOT T8 - 50K | 18.5 | 120-277V | 32 | 2600 | 140.5 | G13 | 5000K | 80 | 25 |

## 15W T8 High Output Ballast Bypass – 4 Foot Shatterproof PET Coated Glass Tubes • G13 Base

|             |                                          |    |          |    |      |       |     |       |    |    |
|-------------|------------------------------------------|----|----------|----|------|-------|-----|-------|----|----|
| LPT815B235K | LED 15W HIGH OUTPUT BALLAST BYPASS - 35K | 15 | 120-277V | 32 | 2100 | 140   | G13 | 3500K | 80 | 25 |
| LPT815B241K | LED 15W HIGH OUTPUT BALLAST BYPASS - 41K | 15 | 120-277V | 32 | 2200 | 146.7 | G13 | 4100K | 80 | 25 |
| LPT815B250K | LED 15W HIGH OUTPUT BALLAST BYPASS - 50K | 15 | 120-277V | 32 | 2200 | 146.7 | G13 | 5000K | 80 | 25 |

# LiberaT5 Tubes



| ITEM #                                                                                             | DESCRIPTION                              | LAMP WATTAGE | VOLTAGE  | FLUORESCENT EQUIV. | LUMENS | LPW   | BASE | CCT   | CRI | MASTER PACK |
|----------------------------------------------------------------------------------------------------|------------------------------------------|--------------|----------|--------------------|--------|-------|------|-------|-----|-------------|
| <b>12W T5 High Output Ballast Bypass – 2 Foot Shatterproof PET Coated Glass Tubes • G5 Base</b>    |                                          |              |          |                    |        |       |      |       |     |             |
| IT5HO12B130K                                                                                       | LED 12W HIGH OUTPUT BALLAST BYPASS - 30K | 12           | 120-277V | 24                 | 1450   | 120.8 | G5   | 3000K | 80  | 25          |
| IT5HO12B135K                                                                                       | LED 12W HIGH OUTPUT BALLAST BYPASS - 35K | 12           | 120-277V | 24                 | 1450   | 120.8 | G5   | 3500K | 80  | 25          |
| IT5HO12B141K                                                                                       | LED 12W HIGH OUTPUT BALLAST BYPASS - 41K | 12           | 120-277V | 24                 | 1450   | 120.8 | G5   | 4100K | 80  | 25          |
| IT5HO12B150K                                                                                       | LED 12W HIGH OUTPUT BALLAST BYPASS - 50K | 12           | 120-277V | 24                 | 1450   | 120.8 | G5   | 5000K | 80  | 25          |
| <b>16W T5 High Output Ballast Bypass – 3 Foot Shatterproof PET Coated Glass Tubes • G5 Base</b>    |                                          |              |          |                    |        |       |      |       |     |             |
| IT5HO16B130K                                                                                       | LED 16W HIGH OUTPUT BALLAST BYPASS - 30K | 16           | 120-277V | 39                 | 1850   | 115.6 | G5   | 3000K | 80  | 25          |
| IT5HO16B135K                                                                                       | LED 16W HIGH OUTPUT BALLAST BYPASS - 35K | 16           | 120-277V | 39                 | 1850   | 115.6 | G5   | 3500K | 80  | 25          |
| IT5HO16B141K                                                                                       | LED 16W HIGH OUTPUT BALLAST BYPASS - 41K | 16           | 120-277V | 39                 | 1850   | 115.6 | G5   | 4100K | 80  | 25          |
| IT5HO16B150K                                                                                       | LED 16W HIGH OUTPUT BALLAST BYPASS - 50K | 16           | 120-277V | 39                 | 1850   | 115.6 | G5   | 5000K | 80  | 25          |
| <b>25W T5 High Output Ballast Bypass – 4 Foot Shatterproof PET Coated Glass Tubes • G5 Base</b>    |                                          |              |          |                    |        |       |      |       |     |             |
| IT5HO25B130K                                                                                       | LED 25W HIGH OUTPUT BALLAST BYPASS - 30K | 25           | 120-277V | 54                 | 3200   | 128   | G5   | 3000K | 80  | 25          |
| IT5HO25B135K                                                                                       | LED 25W HIGH OUTPUT BALLAST BYPASS - 35K | 25           | 120-277V | 54                 | 3200   | 128   | G5   | 3500K | 80  | 25          |
| IT5HO25B141K                                                                                       | LED 25W HIGH OUTPUT BALLAST BYPASS - 41K | 25           | 120-277V | 54                 | 3200   | 128   | G5   | 4100K | 80  | 25          |
| IT5HO25B150K                                                                                       | LED 25W HIGH OUTPUT BALLAST BYPASS - 50K | 25           | 120-277V | 54                 | 3200   | 128   | G5   | 5000K | 80  | 25          |
| <b>9W T5 Ballast Bypass – 2 Foot Shatterproof PET Coated Glass Tubes • G5 Base</b>                 |                                          |              |          |                    |        |       |      |       |     |             |
| IT5HE09B130K                                                                                       | LED 9W BALLAST BYPASS 2 FOOT T5 - 30K    | 9            | 120-277V | 14                 | 1150   | 127.7 | G5   | 3000K | 80  | 25          |
| IT5HE09B135K                                                                                       | LED 9W BALLAST BYPASS 2 FOOT T5 - 35K    | 9            | 120-277V | 14                 | 1150   | 127.7 | G5   | 3500K | 80  | 25          |
| IT5HE09B141K                                                                                       | LED 9W BALLAST BYPASS 2 FOOT T5 - 41K    | 9            | 120-277V | 14                 | 1150   | 127.7 | G5   | 4100K | 80  | 25          |
| IT5HE09B150K                                                                                       | LED 9W BALLAST BYPASS 2 FOOT T5 - 50K    | 9            | 120-277V | 14                 | 1150   | 127.7 | G5   | 5000K | 80  | 25          |
| <b>12W T5 Ballast Bypass – 3 Foot Shatterproof PET Coated Glass Tubes • G5 Base</b>                |                                          |              |          |                    |        |       |      |       |     |             |
| IT5HE12B130K                                                                                       | LED 12W BALLAST BYPASS 3 FOOT T5 - 30K   | 12           | 120-277V | 21                 | 1350   | 112.5 | G5   | 3000K | 80  | 25          |
| IT5HE12B135K                                                                                       | LED 12W BALLAST BYPASS 3 FOOT T5 - 35K   | 12           | 120-277V | 21                 | 1350   | 112.5 | G5   | 3500K | 80  | 25          |
| IT5HE12B141K                                                                                       | LED 12W BALLAST BYPASS 3 FOOT T5 - 41K   | 12           | 120-277V | 21                 | 1350   | 112.5 | G5   | 4100K | 80  | 25          |
| IT5HE12B150K                                                                                       | LED 12W BALLAST BYPASS 3 FOOT T5 - 50K   | 12           | 120-277V | 21                 | 1350   | 112.5 | G5   | 5000K | 80  | 25          |
| <b>13W T5 Ballast Bypass – 4 Foot Shatterproof PET Coated Glass Tubes • G5 Base</b>                |                                          |              |          |                    |        |       |      |       |     |             |
| IT5HE13B130K                                                                                       | LED 13W BALLAST BYPASS 4 FOOT T5 - 30K   | 13           | 120-277V | 28                 | 1650   | 126.9 | G5   | 3000K | 80  | 25          |
| IT5HE13B135K                                                                                       | LED 13W BALLAST BYPASS 4 FOOT T5 - 35K   | 13           | 120-277V | 28                 | 1650   | 126.9 | G5   | 3500K | 80  | 25          |
| IT5HE13B141K                                                                                       | LED 13W BALLAST BYPASS 4 FOOT T5 - 41K   | 13           | 120-277V | 28                 | 1650   | 126.9 | G5   | 4100K | 80  | 25          |
| IT5HE13B150K                                                                                       | LED 13W BALLAST BYPASS 4 FOOT T5 - 50K   | 13           | 120-277V | 28                 | 1650   | 126.9 | G5   | 5000K | 80  | 25          |
| <b>25W T5 Ballast Bypass – 4 Foot Shatterproof PET Coated Glass Tubes • Double Ended • G5 Base</b> |                                          |              |          |                    |        |       |      |       |     |             |
| IT5HO25B241K                                                                                       | LED 25W BALLAST BYPASS 4 FOOT T5 - 41K   | 25           | 120-277V | 54                 | 3300   | 132   | G5   | 4100K | 80  | 25          |
| IT5HO25B250K                                                                                       | LED 25W BALLAST BYPASS 4 FOOT T5 - 50K   | 25           | 120-277V | 54                 | 3400   | 136   | G5   | 5000K | 80  | 25          |

# Select8 Tubes

TCP's Select8 range of color selectable tubes brings energy efficiency and cost savings together in one package. Save on inventory costs by only needing to stock one SKU to fit anywhere.

## Features & Benefits

- Over 50% energy savings compared to 32W fluorescent
- Color selectable for maximum flexibility and savings – use 1 SKU per job for multiple CCT requirements
- Rated for open or enclosed fixtures and damp locations
- Instant on/off, no startup time, non-flickering
- Long Life: 50,000 hours

## Specifications

Construction ..... Type A: Double Ended  
 Type B: Single/Double Ended  
 Type AB: A Mode - Double Ended  
 B Mode - Single/Double Ended

Safety ..... cETLus

Enclosed ..... Suitable for Enclosed Luminaires

Environment ..... Damp/Dry Locations

Ballast ..... Instant Start (Type A), Bypass (Type B)

| ITEM # | DESCRIPTION | LAMP WATTAGE | NBF SYSTEM WATTAGE | VOLTAGE | FLUORESCENT EQUIV. | LUMENS | LPW | BASE | CCT | MASTER CRI | PACK |
|--------|-------------|--------------|--------------------|---------|--------------------|--------|-----|------|-----|------------|------|
|--------|-------------|--------------|--------------------|---------|--------------------|--------|-----|------|-----|------------|------|

### 12W LED Select8 Type A – 4 Foot Glass Tubes

|             |                             |    |    |          |    |      |     |     |                   |    |    |
|-------------|-----------------------------|----|----|----------|----|------|-----|-----|-------------------|----|----|
| LT812A50CCT | LED 12W 4 FT T8, SELECT CCT | 12 | 15 | 120-277V | 32 | 1800 | 121 | G13 | 3500K/4000K/5000K | 80 | 25 |
|-------------|-----------------------------|----|----|----------|----|------|-----|-----|-------------------|----|----|

### 14W T8 Select8 Ballast Bypass – 4 Foot Glass Tubes • G13 Base

|            |                               |    |   |          |    |           |       |     |                               |    |    |
|------------|-------------------------------|----|---|----------|----|-----------|-------|-----|-------------------------------|----|----|
| LT814B2CCT | LED 14W 4 T8 2E BY SELECT CCT | 14 | – | 120-277V | 32 | 1800-1900 | 137.7 | G13 | 3000K/3500K/4000K/5000K/6500K | 80 | 25 |
|------------|-------------------------------|----|---|----------|----|-----------|-------|-----|-------------------------------|----|----|

### 15W T8 Select8 Type AB – 4 Foot Glass Tubes • G13 Base

|            |                                    |    |   |          |    |      |       |     |                   |    |    |
|------------|------------------------------------|----|---|----------|----|------|-------|-----|-------------------|----|----|
| LT815ABCCT | 4' GL LED T8 TYPE AB DE SELECT CCT | 15 | – | 120-277V | 32 | 1900 | 126.7 | G13 | 3500K/4000K/5000K | 80 | 25 |
|------------|------------------------------------|----|---|----------|----|------|-------|-----|-------------------|----|----|



# Direct8 Tubes

TCP's Direct8 tubes are the perfect replacement for old fluorescent lighting. Remove the existing T8 fluorescent and replace with Direct8 Type A plug and play tubes. These tubes feature multiple ballast compatibility including Instant Start, Programmed Start, Rapid Start, and Dimmable ballasts.

## Features & Benefits

- Over 50% energy savings compared to fluorescent alternatives
- Compatible with Instant Start ballasts
- No rewiring of fixture necessary
- Rated for open or enclosed fixtures and damp locations
- Instant on/off
- No mercury – great for all environments

## Specifications

Construction ..... Double Ended (Type A)  
 Single/Double Ended (Type AB)  
 Safety ..... cETLus  
 Enclosed ..... Suitable for Enclosed Luminaires  
 Environment ..... Damp/Dry Locations

| ITEM #                                                                       | DESCRIPTION                               | BARE LAMP VOLTAGE | EQUIV. WATTAGE | LBF SYSTEM WATTAGE | NBF SYSTEM WATTAGE | HBF SYSTEM WATTAGE | LBF LAMP LUMENS | NBF LAMP LUMENS | HBF LAMP LUMENS | BASE | CCT | CRI   |    |
|------------------------------------------------------------------------------|-------------------------------------------|-------------------|----------------|--------------------|--------------------|--------------------|-----------------|-----------------|-----------------|------|-----|-------|----|
| <b>12W LED T8 Instant Start – 4 Foot Glass Tubes</b>                         |                                           |                   |                |                    |                    |                    |                 |                 |                 |      |     |       |    |
| L12T8D5030K                                                                  | LED 12W IS/RS 4 FT T8 - 30K               | 120-277V          | 12             | 32                 | 13                 | 14.9               | 21.5            | 1260            | 1700            | 2280 | G13 | 3000K | 80 |
| L12T8D5035K                                                                  | LED 12W IS/RS 4 FT T8 - 35K               | 120-277V          | 12             | 32                 | 13                 | 14.9               | 21.5            | 1300            | 1750            | 2340 | G13 | 3500K | 80 |
| L12T8D5041K                                                                  | LED 12W IS/RS 4 FT T8 - 41K               | 120-277V          | 12             | 32                 | 13                 | 14.9               | 21.5            | 1340            | 1800            | 2400 | G13 | 4100K | 80 |
| L12T8D5050K                                                                  | LED 12W IS/RS 4 FT T8 - 50K               | 120-277V          | 12             | 32                 | 13                 | 14.9               | 21.5            | 1380            | 1850            | 2480 | G13 | 5000K | 80 |
| <b>12W LED T8 Instant Start – 4 Foot Shatterproof Plastic Tubes</b>          |                                           |                   |                |                    |                    |                    |                 |                 |                 |      |     |       |    |
| LPT815A41K                                                                   | LED 12W 4' T8 IS SC 41K                   | 120-277V          | 12             | 32                 | 13                 | 14.9               | 21.5            | 1650            | 2100            | 2450 | G13 | 4100K | 80 |
| <b>15W LED T8 Instant Start – 4 Foot Glass Tubes</b>                         |                                           |                   |                |                    |                    |                    |                 |                 |                 |      |     |       |    |
| LT818A30K                                                                    | LED 15W IS/RS 4 FT T8 - 30K               | 120-277V          | 15             | 32                 | 15.4               | 17.5               | 25.7            | 2000            | 2300            | 3380 | G13 | 3000K | 80 |
| LT818A35K                                                                    | LED 15W IS/RS 4 FT T8 - 35K               | 120-277V          | 15             | 32                 | 15.4               | 17.5               | 25.7            | 2050            | 2350            | 3450 | G13 | 3500K | 80 |
| LT818A41K                                                                    | LED 15W IS/RS 4 FT T8 - 41K               | 120-277V          | 15             | 32                 | 15.4               | 17.5               | 25.7            | 2050            | 2350            | 3450 | G13 | 4100K | 80 |
| LT818A50K                                                                    | LED 15W IS/RS 4 FT T8 - 50K               | 120-277V          | 15             | 32                 | 15.4               | 17.5               | 25.7            | 2100            | 2400            | 3525 | G13 | 5000K | 80 |
| <b>12W LED High CRI T8 Instant Start – 4 Foot Glass Tubes</b>                |                                           |                   |                |                    |                    |                    |                 |                 |                 |      |     |       |    |
| L12T8D5027K95                                                                | LED 12W IS/RS 4 FT T8 - 27K 95            | 120-277V          | 12             | 32                 | 13                 | 14.9               | 21.5            | 1300            | 1750            | 2340 | G13 | 2700K | 90 |
| L12T8D5030K95                                                                | LED 12W IS/RS 4 FT T8 - 30K 95            | 120-277V          | 12             | 32                 | 13                 | 14.9               | 21.5            | 1340            | 1800            | 2400 | G13 | 3000K | 90 |
| L12T8D5035K95                                                                | LED 12W IS/RS 4 FT T8 - 35K 95            | 120-277V          | 12             | 32                 | 13                 | 14.9               | 21.5            | 1340            | 1800            | 2400 | G13 | 3500K | 90 |
| L12T8D5041K95                                                                | LED 12W IS/RS 4 FT T8 - 41K 95            | 120-277V          | 12             | 32                 | 13                 | 14.9               | 21.5            | 1360            | 1825            | 2425 | G13 | 4100K | 90 |
| L12T8D5050K95                                                                | LED 12W IS/RS 4 FT T8 - 50K 95            | 120-277V          | 12             | 32                 | 13                 | 14.9               | 21.5            | 1380            | 1850            | 2480 | G13 | 5000K | 90 |
| <b>9.5W LED High Output T8 Instant Start – 4 Foot PET Coated Glass Tubes</b> |                                           |                   |                |                    |                    |                    |                 |                 |                 |      |     |       |    |
| LPT809HOA41K                                                                 | LED 9.5W IS/RS 4 FT T8 HO A - 41K SC      | 120-277V          | 9.5            | 32                 | 11.5               | 13                 | 19              | 1400            | 1900            | 2500 | G13 | 4100K | 80 |
| LPT809HOA50K                                                                 | LED 9.5W IS/RS 4 FT T8 HO A - 50K SC      | 120-277V          | 9.5            | 32                 | 11.5               | 13                 | 19              | 1450            | 2000            | 2600 | G13 | 5000K | 80 |
| <b>11W T8 High Efficacy Instant Start – 4 Foot Glass Tubes</b>               |                                           |                   |                |                    |                    |                    |                 |                 |                 |      |     |       |    |
| L11T8D5030K                                                                  | LED 11W HIGH EFFICACY IS/RS 4 FT T8 - 30K | 120-277V          | 11             | 32                 | 11.3               | 13.6               | 18.5            | 1340            | 1800            | 2410 | G13 | 3000K | 80 |
| L11T8D5035K                                                                  | LED 11W HIGH EFFICACY IS/RS 4 FT T8 - 35K | 120-277V          | 11             | 32                 | 11.3               | 13.6               | 18.5            | 1380            | 1850            | 2480 | G13 | 3500K | 80 |
| L11T8D5041K                                                                  | LED 11W HIGH EFFICACY IS/RS 4 FT T8 - 41K | 120-277V          | 11             | 32                 | 11.3               | 13.6               | 18.5            | 1410            | 1900            | 2540 | G13 | 4100K | 80 |
| L11T8D5050K                                                                  | LED 11W HIGH EFFICACY IS/RS 4 FT T8 - 50K | 120-277V          | 11             | 32                 | 11.3               | 13.6               | 18.5            | 1450            | 1950            | 2610 | G13 | 5000K | 80 |



**70**

For the most up-to-date specs and warranty information, please visit [www.tcpi.com](http://www.tcpi.com)



**5** YEAR WARRANTY

| ITEM #                                                                                           | DESCRIPTION                           | VOLTAGE  | BARE LAMP WATTAGE | EQUIV. WATTAGE | LBF SYSTEM WATTAGE | NBF SYSTEM WATTAGE | HBF SYSTEM WATTAGE | LBF LAMP LUMENS | NBF LAMP LUMENS | HBF LAMP LUMENS | BASE | CCT   | CRI |
|--------------------------------------------------------------------------------------------------|---------------------------------------|----------|-------------------|----------------|--------------------|--------------------|--------------------|-----------------|-----------------|-----------------|------|-------|-----|
| <b>10W T8 High Efficacy Instant Start – 4 Foot Glass Tubes Bulk Packs (DLC Search “T80430”)</b>  |                                       |          |                   |                |                    |                    |                    |                 |                 |                 |      |       |     |
| T8043040EBP                                                                                      | LED 10W IS/RS 4 FT T8 - 40K BULK PACK | 120-277V | 10                | 32             | 11.6               | 13.2               | 19.4               | 1625            | 1850            | 2700            | G13  | 4000K | 80  |
| <b>11W T8 Instant Start – 3 Foot Glass Tubes</b>                                                 |                                       |          |                   |                |                    |                    |                    |                 |                 |                 |      |       |     |
| L11T83D5030K                                                                                     | LED 11W IS/RS 3 FT T8 - 30K           | 120-277V | 11                | 25             | 11.6               | 13.5               | 19.2               | 1040            | 1400            | 1870            | G13  | 3000K | 80  |
| L11T83D5035K                                                                                     | LED 11W IS/RS 3 FT T8 - 35K           | 120-277V | 11                | 25             | 11.6               | 13.5               | 19.2               | 1080            | 1450            | 1940            | G13  | 3500K | 80  |
| L11T83D5041K                                                                                     | LED 11W IS/RS 3 FT T8 - 41K           | 120-277V | 11                | 25             | 11.6               | 13.5               | 19.2               | 1110            | 1500            | 2000            | G13  | 4100K | 80  |
| L11T83D5050K                                                                                     | LED 11W IS/RS 3 FT T8 - 50K           | 120-277V | 11                | 25             | 11.6               | 13.5               | 19.2               | 1150            | 1550            | 2070            | G13  | 5000K | 80  |
| <b>9W T8 Instant Start – 2 Foot Glass Tubes</b>                                                  |                                       |          |                   |                |                    |                    |                    |                 |                 |                 |      |       |     |
| L9T8D5030K                                                                                       | LED 9W IS/RS 2 FT T8 - 30K            | 120-277V | 9                 | 17             | 8.5                | 9.5                | 14.2               | 850             | 1150            | 1540            | G13  | 3000K | 80  |
| L9T8D5035K                                                                                       | LED 9W IS/RS 2 FT T8 - 35K            | 120-277V | 9                 | 17             | 8.5                | 9.5                | 14.2               | 870             | 1175            | 1575            | G13  | 3500K | 80  |
| L9T8D5041K                                                                                       | LED 9W IS/RS 2 FT T8 - 41K            | 120-277V | 9                 | 17             | 8.5                | 9.5                | 14.2               | 890             | 1200            | 1600            | G13  | 4100K | 80  |
| L9T8D5050K                                                                                       | LED 9W IS/RS 2 FT T8 - 50K            | 120-277V | 9                 | 17             | 8.5                | 9.5                | 14.2               | 910             | 1225            | 1640            | G13  | 5000K | 80  |
| <b>12W LED T8 Instant Start Ballast Compatible – 4 Foot Plastic Tubes, BAA Compliant</b>         |                                       |          |                   |                |                    |                    |                    |                 |                 |                 |      |       |     |
| LPT81541KUS                                                                                      | LED 12W IS/RS SC - 41K BAA COMPLIANT  | 120-277V | 12                | 32             | 15                 | 18                 | 21.5               | 1650            | 2100            | 2450            | G13  | 4100K | 80  |
| <b>15W LED T8 Instant Start/Rapid Start Ballast Compatible – 4 Foot Shatterproof Glass Tubes</b> |                                       |          |                   |                |                    |                    |                    |                 |                 |                 |      |       |     |
| L15T8D5030KSC                                                                                    | LED 15W IS/RS SC - 30K                | 120-277V | 15                | 32             | 14.5               | 18                 | 21.5               | 1600            | 2000            | 2350            | G13  | 3000K | 80  |
| L15T8D5035KSC                                                                                    | LED 15W IS/RS SC - 35K                | 120-277V | 15                | 32             | 14.5               | 18                 | 21.5               | 1600            | 2000            | 2350            | G13  | 3500K | 80  |
| L15T8D5041KSC                                                                                    | LED 15W IS/RS SC - 41K                | 120-277V | 15                | 32             | 14.5               | 18                 | 21.5               | 1650            | 2100            | 2450            | G13  | 4100K | 80  |
| L15T8D5050KSC                                                                                    | LED 15W IS/RS SC - 50K                | 120-277V | 15                | 32             | 14.5               | 18                 | 21.5               | 1700            | 2200            | 2500            | G13  | 5000K | 80  |
| <b>12W LED T8 Instant Start/Programmed Start Ballast Compatible – 4 Foot All Glass Tubes</b>     |                                       |          |                   |                |                    |                    |                    |                 |                 |                 |      |       |     |
| L12T8PS5030K                                                                                     | LED 12W IS/PS 4 FT T8 - 30K           | 120-277V | 12                | 32             | 13                 | 14.9               | 21.5               | 1260            | 1700            | 2280            | G13  | 3000K | 80  |
| L12T8PS5035K                                                                                     | LED 12W IS/PS 4 FT T8 - 35K           | 120-277V | 12                | 32             | 13                 | 14.9               | 21.5               | 1300            | 1750            | 2340            | G13  | 3500K | 80  |
| L12T8PS5041K                                                                                     | LED 12W IS/PS 4 FT T8 - 41K           | 120-277V | 12                | 32             | 13                 | 14.9               | 21.5               | 1340            | 1800            | 2400            | G13  | 4100K | 80  |
| L12T8PS5050K                                                                                     | LED 12W IS/PS 4 FT T8 - 50K           | 120-277V | 12                | 32             | 13                 | 14.9               | 21.5               | 1380            | 1850            | 2480            | G13  | 5000K | 80  |
| <b>13W LED U-Bend T8 Programmed Start/Rapid Start Ballast Compatible – 6 Inch Plastic</b>        |                                       |          |                   |                |                    |                    |                    |                 |                 |                 |      |       |     |
| L13T8UD5030K                                                                                     | LED 13W U6 IS/RS - 30K                | 120-277V | 13                | 32             | 13                 | 16                 | 22                 | 1400            | 1800            | 2500            | 2G13 | 3000K | 83  |
| L13T8UD5035K                                                                                     | LED 13W U6 IS/RS - 35K                | 120-277V | 13                | 32             | 13                 | 16                 | 22                 | 1400            | 1800            | 2500            | 2G13 | 3500K | 83  |
| L13T8UD5041K                                                                                     | LED 13W U6 IS/RS - 41K                | 120-277V | 13                | 32             | 13                 | 16                 | 22                 | 1450            | 1850            | 2550            | 2G13 | 4100K | 83  |
| L13T8UD5050K                                                                                     | LED 13W U6 IS/RS - 50K                | 120-277V | 13                | 32             | 13                 | 16                 | 22                 | 1500            | 1900            | 2600            | 2G13 | 5000K | 83  |



# DirectT5 Tubes



## 25.5W LED T5 Electronic Ballast Compatible – 4 Foot Shatterproof Glass Tubes

| ITEM #      | DESCRIPTION                   | VOLTAGE  | LAMP WATTAGE | FLUORESCENT EQUIV. | SYSTEM WATTAGE | LUMENS | LPW   | BASE | CCT   | CRI |
|-------------|-------------------------------|----------|--------------|--------------------|----------------|--------|-------|------|-------|-----|
| L25T5D5030K | LED 25.5W RS SC 4 FT T5 - 30K | 120-277V | 25.5         | 54                 | 28             | 3150   | 123.5 | G5   | 3000K | 83  |
| L25T5D5035K | LED 25.5W RS SC 4 FT T5 - 35K | 120-277V | 25.5         | 54                 | 28             | 3150   | 123.5 | G5   | 3500K | 83  |
| L25T5D5041K | LED 25.5W RS SC 4 FT T5 - 41K | 120-277V | 25.5         | 54                 | 28             | 3190   | 125.1 | G5   | 4100K | 83  |
| L25T5D5050K | LED 25.5W RS SC 4 FT T5 - 50K | 120-277V | 25.5         | 54                 | 28             | 3280   | 128.6 | G5   | 5000K | 83  |

## 13W T5 Electronic Ballast Compatible – 4 Foot Shatterproof Glass Tubes

|             |                             |          |    |    |    |      |       |    |       |    |
|-------------|-----------------------------|----------|----|----|----|------|-------|----|-------|----|
| L13T5D5030K | LED 13W RS SC 4 FT T5 - 30K | 120-277V | 13 | 28 | 16 | 1800 | 138.5 | G5 | 3000K | 83 |
| L13T5D5035K | LED 13W RS SC 4 FT T5 - 35K | 120-277V | 13 | 28 | 16 | 1800 | 138.5 | G5 | 3500K | 83 |
| L13T5D5041K | LED 13W RS SC 4 FT T5 - 41K | 120-277V | 13 | 28 | 16 | 1850 | 142.3 | G5 | 4100K | 83 |
| L13T5D5050K | LED 13W RS SC 4 FT T5 - 50K | 120-277V | 13 | 28 | 16 | 1900 | 146.2 | G5 | 5000K | 83 |

## 9W T5 Ballast Compatible – 2 Foot Shatterproof Glass Tubes

|            |                           |          |   |    |   |      |       |    |       |    |
|------------|---------------------------|----------|---|----|---|------|-------|----|-------|----|
| L9T5D5041K | LED 9W 2' T5 HO RS SC 41K | 120-277V | 9 | 24 | - | 1200 | 133.3 | G5 | 4100K | 80 |
| L9T5D5050K | LED 9W 2' T5 HO RS SC 50K | 120-277V | 9 | 24 | - | 1200 | 133.3 | G5 | 5000K | 80 |

## 6W T5 Ballast Compatible – 2 Foot Shatterproof Glass Tubes

|            |                           |          |   |    |   |      |       |    |       |    |
|------------|---------------------------|----------|---|----|---|------|-------|----|-------|----|
| L6T5D5041K | LED 6W 2' T5 HE RS SC 41K | 120-277V | 6 | 14 | - | 1000 | 166.7 | G5 | 4100K | 80 |
| L6T5D5050K | LED 6W 2' T5 HE RS SC 50K | 120-277V | 6 | 14 | - | 1000 | 166.7 | G5 | 5000K | 80 |



## 15W LED T8 – 4 Foot Shatterproof PET Coated Tubes

| ITEM #      | DESCRIPTION            | LINE VOLTAGE WATTAGE | LINE VOLTAGE LUMENS | LINE VOLTAGE LPW | NBF SYSTEM WATTAGE | NBF LAMP LUMENS | NBF SYSTEM LPW | CCT   | CRI |
|-------------|------------------------|----------------------|---------------------|------------------|--------------------|-----------------|----------------|-------|-----|
| LPT818AB35K | LED 15W 4FT T8 AB -35K | 15                   | 2100                | 140              | 18                 | 2200            | 116.7          | 3500K | >80 |
| LPT818AB41K | LED 15W 4FT T8 AB -41K | 15                   | 2200                | 146.7            | 18                 | 2200            | 122.2          | 4100K | >80 |
| LPT818AB50K | LED 15W 4FT T8 AB -50K | 15                   | 2200                | 146.7            | 18                 | 2200            | 122.2          | 5000K | >80 |

## 12W LED T8 – 4 Foot Glass Tubes

|            |                         |    |      |       |      |      |       |       |     |
|------------|-------------------------|----|------|-------|------|------|-------|-------|-----|
| LT815AB30K | LED 12W 4FT T8 AB - 30K | 12 | 1700 | 141.7 | 15.3 | 1700 | 111.5 | 3000K | >80 |
| LT815AB35K | LED 12W 4FT T8 AB - 35K | 12 | 1700 | 141.7 | 15.3 | 1700 | 111.5 | 3500K | >80 |
| LT815AB41K | LED 12W 4FT T8 AB - 41K | 12 | 1800 | 150   | 15.3 | 1800 | 118   | 4100K | >80 |
| LT815AB50K | LED 12W 4FT T8 AB - 50K | 12 | 1800 | 150   | 15.3 | 1800 | 118   | 5000K | >80 |

## 12W LED T8 – 4 Foot Shatterproof PET Coated Tubes

|             |                        |    |      |       |      |      |       |       |     |
|-------------|------------------------|----|------|-------|------|------|-------|-------|-----|
| LPT815AB30K | LED 12W 4FT T8 AB -30K | 12 | 1700 | 141.7 | 15.3 | 1700 | 111.5 | 3000K | >80 |
| LPT815AB35K | LED 12W 4FT T8 AB -35K | 12 | 1700 | 141.7 | 15.3 | 1700 | 111.5 | 3500K | >80 |
| LPT815AB41K | LED 12W 4FT T8 AB -41K | 12 | 1800 | 150   | 15.3 | 1800 | 118   | 4100K | >80 |
| LPT815AB50K | LED 12W 4FT T8 AB -50K | 12 | 1800 | 150   | 15.3 | 1800 | 118   | 5000K | >80 |

# Correlat8 Tubes

TCP now offers LED T8 and T5 Type C Tubes that work with remote LED drivers.

## Features & Benefits

- Excellent for retrofits and custom applications
- Remote driver powers LED Tubes
- Low voltage connection to tube sockets
- Dimmable with 0-10V dimmers
- Environmentally friendly - no mercury and minimal UV and IR

## Specifications

|                    |                                               |
|--------------------|-----------------------------------------------|
| Base Type .....    | G5 (T5), G13 (T8)                             |
| Construction ..... | Single/Double Ended (T5)<br>Single Ended (T8) |
| Safety .....       | UL (T5), ETL (T8)                             |
| Enclosed .....     | Suitable for Enclosed Luminaires              |
| Environment .....  | Damp/Dry Locations                            |

| ITEM #                                                                                                  | DESCRIPTION | LAMP WATTAGE | SYSTEM WATTAGE | VOLTAGE | FLUORESCENT EQUIV. | LUMENS | LPW | BASE | CCT | CRI | MASTER PACK |
|---------------------------------------------------------------------------------------------------------|-------------|--------------|----------------|---------|--------------------|--------|-----|------|-----|-----|-------------|
| <b>12W T8 Type C – 4 Foot Single End Wired PET Coated Glass Tubes, G13 Base DLC Look Up# T80457CXXK</b> |             |              |                |         |                    |        |     |      |     |     |             |



|           |                                |    |    |          |    |      |     |     |       |     |    |
|-----------|--------------------------------|----|----|----------|----|------|-----|-----|-------|-----|----|
| LT812C35K | LED 12W TYPE C 4 FOOT T8 - 35K | 12 | 12 | 120-277V | 32 | 1800 | 150 | G13 | 3500K | >80 | 25 |
| LT812C40K | LED 12W TYPE C 4 FOOT T8 - 40K | 12 | 12 | 120-277V | 32 | 1800 | 150 | G13 | 4000K | >80 | 25 |
| LT812C50K | LED 12W TYPE C 4 FOOT T8 - 50K | 12 | 12 | 120-277V | 32 | 1800 | 150 | G13 | 5000K | >80 | 25 |

### Driver Specifications, 0-10V Dimmable

|          |                                 |   |            |          |   |      |     |   |   |   |    |
|----------|---------------------------------|---|------------|----------|---|------|-----|---|---|---|----|
| LDT8212C | LED TYPE C T8 4FT 2 LAMP DRIVER | - | 30, 45, 60 | 120-277V | - | 3600 | 138 | - | - | - | 25 |
| LDT8312C | LED TYPE C T8 4FT 3 LAMP DRIVER | - | 30, 45, 60 | 120-277V | - | 5400 | 138 | - | - | - | 25 |
| LDT8412C | LED TYPE C T8 4FT 4 LAMP DRIVER | - | 30, 45, 60 | 120-277V | - | 7200 | 138 | - | - | - | 25 |

|                                                                                                                     |  |  |  |  |  |  |  |  |  |  |  |
|---------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
| <b>22W T5 Type C – 4 Foot Double or Single End Wired PET Coated Glass Tubes, G5 Base DLC Look Up# LT5H0100C4XXK</b> |  |  |  |  |  |  |  |  |  |  |  |
|---------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|



|             |                                |    |    |          |    |      |       |    |       |     |    |
|-------------|--------------------------------|----|----|----------|----|------|-------|----|-------|-----|----|
| LT5H025C35K | LED 22W TYPE C 4 FOOT T5 - 35K | 22 | 25 | 120-277V | 54 | 3200 | 145.5 | G5 | 3500K | >80 | 25 |
| LT5H025C40K | LED 22W TYPE C 4 FOOT T5 - 40K | 22 | 25 | 120-277V | 54 | 3300 | 150   | G5 | 4000K | >80 | 25 |
| LT5H025C50K | LED 22W TYPE C 4 FOOT T5 - 50K | 22 | 25 | 120-277V | 54 | 3400 | 154.5 | G5 | 5000K | >80 | 25 |

### Driver Specifications, 0-10V Dimmable

|            |                                    |   |     |          |   |                           |     |   |   |   |    |
|------------|------------------------------------|---|-----|----------|---|---------------------------|-----|---|---|---|----|
| LDT5H0225C | LED TYPE C T5 4FT 2 LAMP HO DRIVER | - | 50  | 120-277V | - | 6400,<br>6600,<br>6800    | 136 | - | - | - | 25 |
| LDT5H0425C | LED TYPE C T5 4FT 3 LAMP HO DRIVER | - | 100 | 120-277V | - | 12800,<br>13200,<br>13600 | 136 | - | - | - | 25 |

|                                                                                                                        |  |  |  |  |  |  |  |  |  |  |  |
|------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
| <b>12W T5 Type C – 4 Foot Single End Wired PET Coated Glass Tubes, G5 Base DLC Look Up# LT5HE26C2XXK/ LT5HE52C4XXK</b> |  |  |  |  |  |  |  |  |  |  |  |
|------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|



|             |                                   |    |    |          |    |      |       |    |       |     |    |
|-------------|-----------------------------------|----|----|----------|----|------|-------|----|-------|-----|----|
| LT5HE13C35K | LED 12W TYPE C HE 4 FOOT T5 - 35K | 12 | 13 | 120-277V | 26 | 1700 | 141.7 | G5 | 3500K | >80 | 25 |
| LT5HE13C40K | LED 12W TYPE C HE 4 FOOT T5 - 40K | 12 | 13 | 120-277V | 26 | 1750 | 145.8 | G5 | 4000K | >80 | 25 |
| LT5HE13C50K | LED 12W TYPE C HE 4 FOOT T5 - 50K | 12 | 13 | 120-277V | 26 | 1800 | 150   | G5 | 5000K | >80 | 25 |

### Driver Specifications, 0-10V Dimmable

|            |                                    |   |    |          |   |                        |     |   |   |   |    |
|------------|------------------------------------|---|----|----------|---|------------------------|-----|---|---|---|----|
| LDT5HE213C | LED TYPE C T5 4FT 2 LAMP HE DRIVER | - | 26 | 120-277V | - | 3400,<br>3500,<br>3600 | 138 | - | - | - | 25 |
| LDT5HE413C | LED TYPE C T5 4FT 3 LAMP HE DRIVER | - | 52 | 120-277V | - | 6800,<br>7000,<br>7200 | 138 | - | - | - | 25 |

# Pro Line Tubes

TCP's Pro Line T8 tubes provide a cost-efficient solution for your T8 lighting needs.

## Features & Benefits

- Provides over 50% energy savings compared to fluorescent alternatives
- Type A is compatible with Instant Start ballasts
- Type B can be wired directly to the line voltage, eliminating the need for ballasts
- Type B is double end (shunted or non-shunted sockets) or single end (non-shunted sockets only) wired
- Inexpensive alternative for cost-sensitive projects

## Specifications

Construction ..... Double Ended (Type A)  
 Single/Double Ended (Type B)  
 Single/Double Ended (Type AB)  
 Safety ..... cETLus  
 Enclosed ..... Suitable for Enclosed Luminaires  
 Environment ..... Damp/Dry Locations

| ITEM # | DESCRIPTION | LINE VOLTAGE WATTAGE | LINE VOLTAGE LUMENS | LINE VOLTAGE LPW | LAMP WATTAGE | EQUIV. WATTAGE | NBF SYSTEM WATTAGE | NBF SYSTEM LUMENS | NBF SYSTEM LPW | BASE | CCT | VOLTAGE | CRI |
|--------|-------------|----------------------|---------------------|------------------|--------------|----------------|--------------------|-------------------|----------------|------|-----|---------|-----|
|--------|-------------|----------------------|---------------------|------------------|--------------|----------------|--------------------|-------------------|----------------|------|-----|---------|-----|

### 15W T8 Pro Line Instant Start – 4 Foot Glass Tubes



|              |                                   |   |   |   |    |    |    |      |       |     |       |          |    |
|--------------|-----------------------------------|---|---|---|----|----|----|------|-------|-----|-------|----------|----|
| LS4T815IS41K | LED 15W PRO LINE IS 4 FT T8 - 41K | - | - | - | 15 | 32 | 17 | 1800 | 105.8 | G13 | 4100K | 120-277V | 80 |
| LS4T815IS50K | LED 15W PRO LINE IS 4 FT T8 - 50K | - | - | - | 15 | 32 | 17 | 1800 | 105.8 | G13 | 5000K | 120-277V | 80 |

### 15W T8 Pro Line Instant Start – 4 Foot U-Bend Plastic Tubes



|               |                                      |   |   |   |    |    |    |      |     |     |       |          |    |
|---------------|--------------------------------------|---|---|---|----|----|----|------|-----|-----|-------|----------|----|
| LSU6T815IS41K | LED 15W PRO LINE IS 4 FT U6 T8 - 41K | - | - | - | 15 | 32 | 17 | 1800 | 100 | G13 | 4100K | 120-277V | 80 |
| LSU6T815IS50K | LED 15W PRO LINE IS 4 FT U6 T8 - 50K | - | - | - | 15 | 32 | 17 | 1800 | 100 | G13 | 5000K | 120-277V | 80 |

### 14W T8 Pro Line 2E Bypass – 4 Foot Glass Tubes



|              |                                          |    |      |       |   |    |   |   |   |     |       |          |    |
|--------------|------------------------------------------|----|------|-------|---|----|---|---|---|-----|-------|----------|----|
| LS4T814B241K | LED 14W PRO LINE 2E BYPASS 4 FT T8 - 41K | 14 | 1800 | 128.6 | - | 32 | - | - | - | G13 | 4100K | 120-277V | 80 |
| LS4T814B250K | LED 14W PRO LINE 2E BYPASS 4 FT T8 - 50K | 14 | 1800 | 128.6 | - | 32 | - | - | - | G13 | 5000K | 120-277V | 80 |

# T8-Ready Elite High Bay

Industra  
by TCP



The TCP LED T8-Ready High Bay is ideal for replacing traditional metal halide and linear fluorescent high bay systems. Benefits include high efficiency, excellent color rendering, long life, instant on, and improved uniformity.

## Construction

- Housing: durable code-grade steel
- Finish: powder coated, post-painted white
- Large wiring compartment and multiple knock-outs to accommodate lighting controls
- Lightweight design

## Electrical

- cULus damp location rated
- Easy-to-access wiring compartment
- LPW rating based on LED tube installed

## Catalog Ordering Matrix

| FAMILY              | LAMP QUANTITY                             | LAMP TYPE*                   | SINGLE END/DOUBLE END                                        | Options   |
|---------------------|-------------------------------------------|------------------------------|--------------------------------------------------------------|-----------|
| EL4WA – 4' High Bay | 4 – 4 Lamps<br>6 – 6 Lamps<br>8 – 8 Lamps | LT5 – LED T5<br>LT8 – LED T8 | B1 – Single End LED T8-Ready<br>B2 – Double End LED T8-Ready | See Below |

### Factory Installed Options (add to end of catalog number)

LS1 – Leviton PIR Occupancy Sensor w/bracket and interchangeable lenses, 40' or less, 120V, 277V or 347V

10C – 10' Power Cord 277V SJTOOW No Plug

### Field Installed Accessories

EZHANGER – 15' adjustable aircraft cable hanging kit (ordered separately)

\*NOTE: LED T5 is Single End Only, B1 configuration

# LED T8-Ready High Bay - Single End

The TCP LED T8-Ready High Bay is ideal for replacing traditional metal halide and linear fluorescent high bay systems. Benefits include high efficiency, excellent color rendering, long life, instant on, and improved uniformity.

Industra  
by TCP



## Construction

- Housing: durable code-grade steel
- Finish: powder coated, post-painted white
- Large wiring compartment and multiple knock-outs to accommodate lighting controls
- Lightweight design

## Electrical

- cULus damp location rated
- Easy-to-access wiring compartment
- LPW rating based on LED T8 used

## Catalog Ordering Matrix

| FAMILY             | LAMP QUANTITY                             | LAMP TYPE*   | SINGLE END/DOUBLE END        | Options   |
|--------------------|-------------------------------------------|--------------|------------------------------|-----------|
| HBL4 - 4' High Bay | 4 - 4 Lamps<br>6 - 6 Lamps<br>8 - 8 Lamps | LT8 - LED T8 | B1 - Single End LED T8-Ready | See Below |

### Factory Installed Options (add to end of catalog number)

**10C** - 10' Power Cord 277V SJTOOW No Plug

**LS1** - Leviton PIR Occupancy Sensor w/bracket and interchangeable lenses, 40' or less, 120V, 277V or 347V

### Field Installed Accessories

**EZHANGER** - 15' adjustable aircraft cable hanging kit (ordered separately)

# Made-In-USA LED T8-Ready General Purpose Strip



The LED T8-Ready Luminaires feature the look of classic fluorescent luminaires while operating modern single- or double-ended LED T8 Type B lamps. The easy-to-install LED T8-Ready General Purpose Strips maintain that traditional look while operating one or two lamps. They are suitable for a wide range of indoor applications including workshops, hallways, laundry rooms and industrial task lighting.

## Construction

- Heavy gauge steel housing
- Durable white powder coat
- High-quality pre-wired lampholders
- Easy-to-install design

## Electrical

- cULus damp location rated
- Sockets are pre-wired for Type B LED lamps

## Catalog Ordering Matrix

| ITEM          | DESCRIPTION                     | LAMP TYPE            | LAMP LENGTH | # LAMPS (NOT INCLUDED) | LUMINAIRE LENGTH |
|---------------|---------------------------------|----------------------|-------------|------------------------|------------------|
| GPS4WA1LT8B1  | 4FT 1L SINGLE END T8 BYPASS RDY | SINGLE END TYPE B T8 | 4FT         | 1                      | 4FT              |
| GPS4WA1LT8B2  | 4FT 1L DOUBLE END T8 BYPASS RDY | DOUBLE END TYPE B T8 | 4FT         | 1                      | 4FT              |
| GPS4WA2LT8B1  | 4FT 2L SINGLE END T8 BYPASS RDY | SINGLE END TYPE B T8 | 4FT         | 2                      | 4FT              |
| GPS4WA2LT8B2  | 4FT 2L DOUBLE END T8 BYPASS RDY | DOUBLE END TYPE B T8 | 4FT         | 2                      | 4FT              |
| GPS8WA2LT8B1  | 8FT 2L SINGLE END T8 BYPASS RDY | SINGLE END TYPE B T8 | 4FT         | 2                      | 8FT              |
| GPS8WA2LT8B2  | 8FT 2L DOUBLE END T8 BYPASS RDY | DOUBLE END TYPE B T8 | 4FT         | 2                      | 8FT              |
| GPS8WA4LT8B1  | 8FT 4L SINGLE END T8 BYPASS RDY | SINGLE END TYPE B T8 | 4FT         | 4                      | 8FT              |
| GPS8WA4LT8B2  | 8FT 4L DOUBLE END T8 BYPASS RDY | DOUBLE END TYPE B T8 | 4FT         | 4                      | 8FT              |
| GPS8WA2L8T8B2 | 8FT 2L FA8 SOCKET DE BYPASS RDY | DOUBLE END TYPE B T8 | 8FT         | 2                      | 8FT              |

### Factory Installed Options (add to end of catalog number)

**LS1** – Leviton PIR Occupancy Sensor w/bracket and interchangeable lenses, 40' or less, 120V, 277V or 347V

### Field Installed Accessories

**GPWG** – Wire guard for T8 ready strip (4ft sections)

**YTG HANGER** – 15ft Y-Cable Toggle Hanging Kit

# Made-In-USA LED T8-Ready Surface Wrap

The LED T8-Ready luminaires feature the look of classic fluorescent luminaires while operating modern single- or double-ended LED T8 Type B lamps. The easy-to-install LED T8-Ready Surface Wrap maintains that classic look while operating one or two lamps.



## Construction

- 22 gauge steel housing
- Durable white powder coat
- High quality pre-wired lampholders
- Easy-to-install design

## Electrical

- cULus damp location rated
- Sockets are pre-wired for Type B LED lamps

## Catalog Ordering Matrix

| ITEM            | DESCRIPTION                                     | LAMP TYPE            | LAMP LENGTH | # LAMPS (NOT INCLUDED) | LUMINAIRE LENGTH |
|-----------------|-------------------------------------------------|----------------------|-------------|------------------------|------------------|
| WRP4WA2IT8B1    | 4FT 2L SINGLE END T8 BYPASS RDY                 | SINGLE END TYPE B T8 | 4FT         | 2                      | 4FT              |
| WRP4WA2IT8B1LS1 | 4FT 2L SINGLE END T8 BYPASS RDY W/MOTION SENSOR | SINGLE END TYPE B T8 | 4FT         | 2                      | 4FT              |
| WRP4WA2IT8B2    | 4FT 2L DOUBLE END T8 BYPASS RDY                 | DOUBLE END TYPE B T8 | 4FT         | 2                      | 4FT              |
| WRP4WA2IT8B2LS1 | 4FT 2L DOUBLE END T8 BYPASS RDY W/MOTION SENSOR | DOUBLE END TYPE B T8 | 4FT         | 2                      | 4FT              |


### Factory Installed Options (add to end of catalog number)

**LS1** – Leviton PIR Occupancy Sensor w/bracket and interchangeable lenses, 40' or less, 120V or 277V

### Field Installed Accessories

**YTGHANGER** – 15ft Y-Cable Toggle Hanging Kit

# LED Magnetic Retrofit Kits

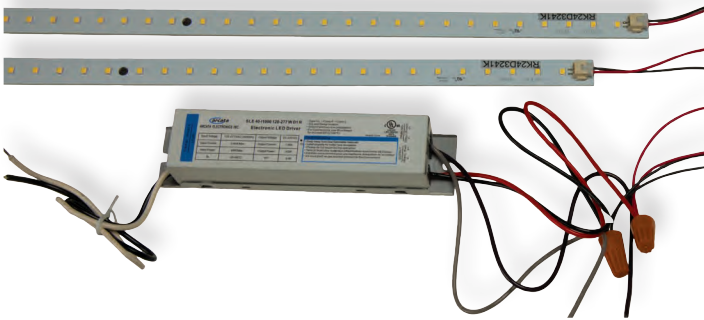

The LED Magnetic Kit by TCP is a versatile solution for endless applications. Ceiling fixtures, factories, general lighting, hospitals, office lighting, strip light fixtures and warehouses are just a few of the places the kits can be used. The kits are quick to install and will provide a long lasting durable light source for years to come.

## Features & Benefits


- High efficiency of 140+ LPW LED system
- Magnetic mount option provides for quick field installation
- Can be used in a variety of luminaires
- Above-the-ceiling access is not required for installation
- 100,000 hour rated life
- 0-10V dimmable driver
- Easily convert fluorescent troffer and strip luminaires to LED for instant energy savings
- 1 strip kit is 16W; 2 strip kit is 32W

## Catalog Ordering Matrix

| FAMILY                | NUMBER OF STRIPS                     | LENGTH                                       | CONTROLS          | WATTAGE <sup>2</sup> | COLOR TEMPERATURE          |
|-----------------------|--------------------------------------|----------------------------------------------|-------------------|----------------------|----------------------------|
| RK – LED Retrofit Kit | 1 – Strip(2250 lumens) <sup>1</sup>  | 2 – 21 inch strip(s)<br>4 – 43 inch strip(s) | D – 0-10V Dimming | 16 – 16W             | 41K – 4100K<br>50K – 5000K |
|                       | 2 – Strips(4500 lumens) <sup>1</sup> |                                              |                   | 32 – 32W             |                            |

<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>2</sup> Actual wattage may differ by +/- 10%.




# LED HID Lamps

TCP's LED HID Replacement Lamps come in a variety of styles, color temperatures, and wattages that will deliver maximum light output. Each lamp features an isolated driver for better heat dissipation as well as eliminates the need for a ballast, plus high voltage surge protection.

## In this section:

|                                       |              |
|---------------------------------------|--------------|
| LED High Lumen Filament Lamps .....   | <b>82-83</b> |
| LED T-Shape HID Lamps .....           | <b>84</b>    |
| LED High Bay Retrofit Lamps.....      | <b>85</b>    |
| LED HID Area Lamps.....               | <b>86</b>    |
| LED Corn Cob Lamps .....              | <b>87-89</b> |
| LED HID Replacement Accessories ..... | <b>90</b>    |



# LED High Lumen Filament Lamps

TCP's energy-efficient High Lumen LED Filament Lamps are exceptional replacements for HID metal halide lamps and a great alternative to Corn Cob replacement lamps. The classic HID shape fits perfectly into existing fixtures – from High Bay to Low Bay fixtures, as well as base down and horizontal applications such as bollards and wall packs. Bypass application means that no ballasts are needed.

## Features & Benefits

- Universal burn position
- Versatile – can be used in open or enclosed fixtures
- 360° beam angle
- Energy savings of more than 75% over traditional HID metal halide lamps
- Instant start

## Specifications

Color Temperatures ... 2200K, 2400K, 2700K, 2950K, 3500K, 4000K, 5000K

Input Line Voltage..... 120 VAC

Frequency ..... 50/60HZ

CRI..... 80

Base..... E26, E39

### 15W ED17 High Lumen Filament Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life



| ITEM #           | DESCRIPTION              | VOLTAGE  | WATTS | METAL HALIDE COMPARISON | LUMENS | LPW   | CCT   | CRI | CASE QTY. | LAMP SHAPE |
|------------------|--------------------------|----------|-------|-------------------------|--------|-------|-------|-----|-----------|------------|
| FED17N05022E26CL | ED17 50W 2200K E26 CLEAR | 120-277V | 15    | 50W                     | 1800   | 120.0 | 2200K | 80  | 12        | ED17       |
| FED17N05022E26FR | ED17 50W 2200K E26 FROST | 120-277V | 15    | 50W                     | 1800   | 120.0 | 2200K | 80  | 12        | ED17       |
| FED17N05024E26CL | ED17 50W 2400K E26 CLEAR | 120-277V | 15    | 50W                     | 1800   | 120.0 | 2400K | 80  | 12        | ED17       |
| FED17N05024E26FR | ED17 50W 2400K E26 FROST | 120-277V | 15    | 50W                     | 1800   | 120.0 | 2400K | 80  | 12        | ED17       |
| FED17N05027E26CL | ED17 50W 2700K E26 CLEAR | 120-277V | 15    | 50W                     | 2200   | 146.7 | 2700K | 80  | 12        | ED17       |
| FED17N05027E26FR | ED17 50W 2700K E26 FROST | 120-277V | 15    | 50W                     | 2200   | 146.7 | 2700K | 80  | 12        | ED17       |
| FED17N05029E26CL | ED17 50W 2950K E26 CLEAR | 120-277V | 15    | 50W                     | 2500   | 166.7 | 2950K | 80  | 12        | ED17       |
| FED17N05029E26FR | ED17 50W 2950K E26 FROST | 120-277V | 15    | 50W                     | 2500   | 166.7 | 2950K | 80  | 12        | ED17       |
| FED17N05035E26CL | ED17 50W 3500K E26 CLEAR | 120-277V | 15    | 50W                     | 2500   | 166.7 | 3500K | 80  | 12        | ED17       |
| FED17N05035E26FR | ED17 50W 3500K E26 FROST | 120-277V | 15    | 50W                     | 2500   | 166.7 | 3500K | 80  | 12        | ED17       |
| FED17N05040E26CL | ED17 50W 4000K E26 CLEAR | 120-277V | 15    | 50W                     | 2500   | 166.7 | 4000K | 80  | 12        | ED17       |
| FED17N05040E26FR | ED17 50W 4000K E26 FROST | 120-277V | 15    | 50W                     | 2500   | 166.7 | 4000K | 80  | 12        | ED17       |
| FED17N05050E26CL | ED17 50W 5000K E26 CLEAR | 120-277V | 15    | 50W                     | 2500   | 166.7 | 5000K | 80  | 12        | ED17       |
| FED17N05050E26FR | ED17 50W 5000K E26 FROST | 120-277V | 15    | 50W                     | 2500   | 166.7 | 5000K | 80  | 12        | ED17       |

### 26W ED23 High Lumen Filament Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life



|                  |                         |          |    |     |      |       |       |    |   |      |
|------------------|-------------------------|----------|----|-----|------|-------|-------|----|---|------|
| FED23N15022E26CL | ED23 150W 22K E26 CLEAR | 120-277V | 26 | 150 | 3600 | 143.8 | 2200K | 80 | 6 | ED23 |
| FED23N15040E26CL | ED23 150W 40K E26 CLEAR | 120-277V | 26 | 150 | 5000 | 187.5 | 4000K | 80 | 6 | ED23 |
| FED23N15040E26FR | ED23 150W 40K E26 FROST | 120-277V | 26 | 150 | 5000 | 192.3 | 4000K | 80 | 6 | ED23 |
| FED23N15050E26CL | ED23 150W 50K E26 CLEAR | 120-277V | 26 | 150 | 5000 | 187.5 | 5000K | 80 | 6 | ED23 |
| FED23N15050E26FR | ED23 150W 50K E26 FROST | 120-277V | 26 | 150 | 5000 | 192.3 | 5000K | 80 | 6 | ED23 |

# LED High Lumen Filament Lamps

## 26W ED23 High Lumen Filament Lamps – Non-Dimmable • E39 Base • 50,000 Rated Life



| ITEM #           | DESCRIPTION             | VOLTAGE  | WATTS | METAL HALIDE COMPARISON | LUMENS | LPW   | CCT   | CRI | CASE QTY. | LAMP SHAPE |
|------------------|-------------------------|----------|-------|-------------------------|--------|-------|-------|-----|-----------|------------|
| FED23N15040E39CL | ED23 150W 40K E39 CLEAR | 120-277V | 26    | 150                     | 5000   | 192.3 | 4000K | 80  | 6         | ED23       |
| FED23N15040E39FR | ED23 150W 40K E39 FROST | 120-277V | 26    | 150                     | 5000   | 192.3 | 4000K | 80  | 6         | ED23       |
| FED23N15050E39CL | ED23 150W 50K E39 CLEAR | 120-277V | 26    | 150                     | 5000   | 192.3 | 5000K | 80  | 6         | ED23       |
| FED23N15050E39FR | ED23 150W 50K E39 FROST | 120-277V | 26    | 150                     | 5000   | 192.3 | 5000K | 80  | 6         | ED23       |

## 30W ED28 High Lumen Filament Lamps – Non-Dimmable • E39 Base • 50,000 Rated Life



|                  |                         |          |    |     |      |       |       |    |   |      |
|------------------|-------------------------|----------|----|-----|------|-------|-------|----|---|------|
| FED28N15022E39CL | ED28 150W 22K E39 CLEAR | 120-277V | 30 | 150 | 4600 | 143.8 | 2200K | 80 | 6 | ED28 |
| FED28N15040E39CL | ED28 150W 40K E39 CLEAR | 120-277V | 30 | 150 | 6000 | 187.5 | 4000K | 80 | 6 | ED28 |
| FED28N15040E39FR | ED28 150W 40K E39 FROST | 120-277V | 30 | 150 | 6000 | 200.0 | 4000K | 80 | 6 | ED28 |
| FED28N15050E39CL | ED28 150W 50K E39 CLEAR | 120-277V | 30 | 150 | 6000 | 187.5 | 5000K | 80 | 6 | ED28 |
| FED28N15050E39FR | ED28 150W 50K E39 FROST | 120-277V | 30 | 150 | 6000 | 200.0 | 5000K | 80 | 6 | ED28 |

## 40W ED28 High Lumen Filament Lamps – Non-Dimmable • E39 Base • 50,000 Rated Life



|                  |                         |          |    |     |      |       |       |    |   |      |
|------------------|-------------------------|----------|----|-----|------|-------|-------|----|---|------|
| FED28N25040E39CL | ED28 250W 40K E39 CLEAR | 120-277V | 40 | 250 | 8000 | 200.0 | 4000K | 80 | 6 | ED28 |
| FED28N25040E39FR | ED28 250W 40K E39 FROST | 120-277V | 40 | 250 | 8000 | 200.0 | 4000K | 80 | 6 | ED28 |
| FED28N25050E39CL | ED28 250W 50K E39 CLEAR | 120-277V | 40 | 250 | 8000 | 200.0 | 5000K | 80 | 6 | ED28 |
| FED28N25050E39FR | ED28 250W 50K E39 FROST | 120-277V | 40 | 250 | 8000 | 200.0 | 5000K | 80 | 6 | ED28 |

## 60W ED28 High Lumen Filament Lamps – Non-Dimmable • E39 Base • 50,000 Rated Life



|                  |                         |          |    |     |        |       |       |    |   |      |
|------------------|-------------------------|----------|----|-----|--------|-------|-------|----|---|------|
| FED28N32040E39CL | ED28 320W 40K E39 CLEAR | 120-277V | 60 | 320 | 10,000 | 166.7 | 4000K | 80 | 6 | ED28 |
| FED28N32050E39CL | ED28 320W 50K E39 CLEAR | 120-277V | 60 | 320 | 10,000 | 166.7 | 5000K | 80 | 6 | ED28 |

## 60W ED37 High Lumen Filament Lamps – Non-Dimmable • E39 Base • 50,000 Rated Life



|                  |                         |          |    |     |        |       |       |    |   |      |
|------------------|-------------------------|----------|----|-----|--------|-------|-------|----|---|------|
| FED37N40022E39CL | ED37 400W 22K E39 CLEAR | 120-277V | 60 | 400 | 8700   | 145   | 2200K | 80 | 6 | ED37 |
| FED37N40040E39CL | ED37 400W 40K E39 CLEAR | 120-277V | 60 | 400 | 11,000 | 183.3 | 4000K | 80 | 6 | ED37 |
| FED37N40050E39CL | ED37 400W 50K E39 CLEAR | 120-277V | 60 | 400 | 11,000 | 183.3 | 5000K | 80 | 6 | ED37 |

# LED T-Shape HID Lamps

TCP's LED T-shape HID replacements are changing the LED game. Unlike traditional HID and LED "Corn Cob" solutions, the TCP LED T-shapes are directional and deliver maximum lumens on the floor. The plastic lens helps to minimize glare and increase overall lamp performance.

## Features & Benefits

- Operates on less energy than traditional metal halide products for instant energy savings
- T-Lights' directional 180° beam angle delivers maximum lumen distribution on the floor
- Shatter resistance lowers the risk of injury and breakage
- T-Lights are wet location rated – when exposed to water use only with device base up

## Specifications

|                          |              |
|--------------------------|--------------|
| Color Temperatures ..... | 4000K, 5000K |
| Input Line Voltage.....  | 120 VAC      |
| Frequency .....          | 50/60HZ      |
| CRI.....                 | 80           |
| Base.....                | E26, EX39    |

### 20W T-Shape Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life



| ITEM #    | DESCRIPTION                               | VOLTAGE  | WATTS | METAL HALIDE COMPARISON | LUMENS | LPW | CCT   | CRI | CASE QTY. |
|-----------|-------------------------------------------|----------|-------|-------------------------|--------|-----|-------|-----|-----------|
| LHID07040 | LED 20W 40K HID REPLACEMENT LAMP E26 BASE | 120-277V | 20    | 100                     | 3000   | 150 | 4000K | 80  | 6         |
| LHID07050 | LED 20W 50K HID REPLACEMENT LAMP E26 BASE | 120-277V | 20    | 100                     | 3000   | 150 | 5000K | 80  | 6         |

### 25W T-Shape Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life



|           |                                            |          |    |     |      |     |       |    |   |
|-----------|--------------------------------------------|----------|----|-----|------|-----|-------|----|---|
| LHID10040 | LED 25W 40K HID REPLACEMENT LAMP, E26 BASE | 120-277V | 25 | 150 | 3750 | 150 | 4000K | 80 | 6 |
| LHID10050 | LED 25W 50K HID REPLACEMENT LAMP, E26 BASE | 120-277V | 25 | 150 | 3750 | 150 | 5000K | 80 | 6 |

### 40W T-Shape Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life



|           |                                            |          |    |     |      |       |       |    |   |
|-----------|--------------------------------------------|----------|----|-----|------|-------|-------|----|---|
| LHID15040 | LED 40W 40K HID REPLACEMENT LAMP, E26 BASE | 120-277V | 40 | 175 | 5850 | 146.3 | 4000K | 80 | 6 |
| LHID15050 | LED 40W 50K HID REPLACEMENT LAMP, E26 BASE | 120-277V | 40 | 175 | 5850 | 146.3 | 5000K | 80 | 6 |

### 65W T-Shape Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life



|           |                                             |          |    |     |      |       |       |    |   |
|-----------|---------------------------------------------|----------|----|-----|------|-------|-------|----|---|
| LHID17540 | LED 65W 40K HID REPLACEMENT LAMP, EX39 BASE | 120-277V | 65 | 250 | 9900 | 152.3 | 4000K | 80 | 6 |
| LHID17550 | LED 65W 50K HID REPLACEMENT LAMP, EX39 BASE | 120-277V | 65 | 250 | 9900 | 152.3 | 5000K | 80 | 6 |

### 90W T-Shape Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life



|           |                                             |          |    |     |       |       |       |    |   |
|-----------|---------------------------------------------|----------|----|-----|-------|-------|-------|----|---|
| LHID25040 | LED 90W 40K HID REPLACEMENT LAMP, EX39 BASE | 120-277V | 90 | 400 | 13600 | 151.1 | 4000K | 80 | 6 |
| LHID25050 | LED 90W 50K HID REPLACEMENT LAMP, EX39 BASE | 120-277V | 90 | 400 | 13600 | 151.1 | 5000K | 80 | 6 |

# LED High Bay Retrofit Lamps

TCP's LED High Bay Retrofit Lamps are changing the LED game. With 110° beam angles, High Bay Retrofit lamps provide excellent directional lighting. The plastic lens helps to minimize glare.

## Features & Benefits

- Operates on less energy than traditional metal halide products for instant energy savings
- High Bay Retrofits' 110° beam angle is good for tighter directional lighting
- Shatter resistance lowers the risk of injury and breakage
- T-Lights are wet location rated – when exposed to water use only with device base up

## Specifications

|                          |                |
|--------------------------|----------------|
| Color Temperatures ..... | 4000K, 5000K   |
| Input Line Voltage.....  | 120 VAC        |
| Frequency .....          | 50/60HZ        |
| CRI.....                 | 80             |
| Base.....                | E26, E39, EX39 |

| ITEM #                                                                                    | DESCRIPTION | VOLTAGE | WATTS | METAL HALIDE COMPARISON | LUMENS | LPW | CCT | CRI | CASE QTY. |
|-------------------------------------------------------------------------------------------|-------------|---------|-------|-------------------------|--------|-----|-----|-----|-----------|
| <b>72W High Bay Vertical Retrofit Lamps – Non-Dimmable • E39 Base • 50,000 Rated Life</b> |             |         |       |                         |        |     |     |     |           |



|            |                            |          |    |     |        |       |       |    |   |
|------------|----------------------------|----------|----|-----|--------|-------|-------|----|---|
| LHIDV07050 | LED 72W MH250 VERT E39 50K | 100-277V | 72 | 250 | 11,000 | 152.7 | 5000K | 80 | 6 |
|------------|----------------------------|----------|----|-----|--------|-------|-------|----|---|

|                                                                                            |  |  |  |  |  |  |  |  |  |
|--------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
| <b>105W High Bay Vertical Retrofit Lamps – Non-Dimmable • E39 Base • 50,000 Rated Life</b> |  |  |  |  |  |  |  |  |  |
|--------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|



|            |                             |          |     |     |        |       |       |    |   |
|------------|-----------------------------|----------|-----|-----|--------|-------|-------|----|---|
| LHIDV10550 | LED 105W MH400 VERT E39 50K | 100-277V | 105 | 400 | 15,500 | 147.6 | 5000K | 80 | 6 |
|------------|-----------------------------|----------|-----|-----|--------|-------|-------|----|---|

|                                                                                            |  |  |  |  |  |  |  |  |  |
|--------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
| <b>152W High Bay Vertical Retrofit Lamps – Non-Dimmable • E39 Base • 50,000 Rated Life</b> |  |  |  |  |  |  |  |  |  |
|--------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|



|            |                             |          |     |     |        |     |       |    |   |
|------------|-----------------------------|----------|-----|-----|--------|-----|-------|----|---|
| LHIDV15050 | LED 152W MH600 VERT E39 50K | 100-277V | 152 | 600 | 25,000 | 135 | 5000K | 80 | 6 |
|------------|-----------------------------|----------|-----|-----|--------|-----|-------|----|---|

|                                                                                  |  |  |  |  |  |  |  |  |  |
|----------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
| <b>60W High Bay Retrofit Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life</b> |  |  |  |  |  |  |  |  |  |
|----------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|



|               |                                            |          |    |     |      |     |       |    |   |
|---------------|--------------------------------------------|----------|----|-----|------|-----|-------|----|---|
| L60HBE265040K | LED 60W 40K HID REPLACEMENT LAMP, E26 BASE | 100-277V | 60 | 200 | 8100 | 135 | 4000K | 80 | 6 |
|---------------|--------------------------------------------|----------|----|-----|------|-----|-------|----|---|

|               |                                            |          |    |     |      |     |       |    |   |
|---------------|--------------------------------------------|----------|----|-----|------|-----|-------|----|---|
| L60HBE265050K | LED 60W 50K HID REPLACEMENT LAMP, E26 BASE | 100-277V | 60 | 200 | 8100 | 135 | 5000K | 80 | 6 |
|---------------|--------------------------------------------|----------|----|-----|------|-----|-------|----|---|

|                                                                                   |  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
| <b>80W High Bay Retrofit Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life</b> |  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|



|                |                                             |          |    |     |        |     |       |    |   |
|----------------|---------------------------------------------|----------|----|-----|--------|-----|-------|----|---|
| L80HBEX395040K | LED 80W 40K HID REPLACEMENT LAMP, EX39 BASE | 100-277V | 80 | 250 | 10,800 | 135 | 4000K | 80 | 6 |
|----------------|---------------------------------------------|----------|----|-----|--------|-----|-------|----|---|

|                |                                             |          |    |     |        |     |       |    |   |
|----------------|---------------------------------------------|----------|----|-----|--------|-----|-------|----|---|
| L80HBEX395050K | LED 80W 50K HID REPLACEMENT LAMP, EX39 BASE | 100-277V | 80 | 250 | 10,800 | 135 | 5000K | 80 | 6 |
|----------------|---------------------------------------------|----------|----|-----|--------|-----|-------|----|---|

|                                                                                    |  |  |  |  |  |  |  |  |  |
|------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
| <b>115W High Bay Retrofit Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life</b> |  |  |  |  |  |  |  |  |  |
|------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|



|                 |                                              |          |     |     |       |     |       |    |   |
|-----------------|----------------------------------------------|----------|-----|-----|-------|-----|-------|----|---|
| L115HBEX395040K | LED 115W 40K HID REPLACEMENT LAMP, EX39 BASE | 100-277V | 115 | 400 | 15525 | 135 | 4000K | 80 | 6 |
|-----------------|----------------------------------------------|----------|-----|-----|-------|-----|-------|----|---|

|                 |                                              |          |     |     |       |     |       |    |   |
|-----------------|----------------------------------------------|----------|-----|-----|-------|-----|-------|----|---|
| L115HBEX395050K | LED 115W 50K HID REPLACEMENT LAMP, EX39 BASE | 100-277V | 115 | 400 | 15525 | 135 | 5000K | 80 | 6 |
|-----------------|----------------------------------------------|----------|-----|-----|-------|-----|-------|----|---|

# LED HID Area Lamps

TCP's energy-efficient LED HID Replacement Area Lamps are an excellent choice for replacing traditional high-intensity discharge lamps. These are damp location rated and designed for indoor/outdoor use where low maintenance and high lumen output is required.

## Features & Benefits

- Uses less energy than high-intensity discharge products
- 180° beam angle directs the light where it needs to go
- Isolated driver for better heat dissipation and eliminating the need for a ballast
- 20W, 40W, 60W Lamps have Stepless Dimming which allows for the light output to be adjusted from 20% to 100%

## Specifications

|                          |              |
|--------------------------|--------------|
| Color Temperatures ..... | 4000K, 5000K |
| Input Line Voltage.....  | 120 VAC      |
| Frequency .....          | 50/60HZ      |
| CRI.....                 | ≥ 85         |
| Base.....                | E26, EX39    |

### 20W Area Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life



| ITEM #        | DESCRIPTION                                   | VOLTAGE  | WATTS | METAL HALIDE COMPARISON | LUMENS | LPW | CCT   | CRI | CASE QTY. |
|---------------|-----------------------------------------------|----------|-------|-------------------------|--------|-----|-------|-----|-----------|
| L20ARLE26U40K | LED 20W 40K HID100 REPLACEMENT LAMP, E26 BASE | 100-277V | 20    | 150                     | 3000   | 150 | 4000K | 85  | 6         |
| L20ARLE26U50K | LED 20W 50K HID100 REPLACEMENT LAMP, E26 BASE | 100-277V | 20    | 150                     | 3000   | 150 | 5000K | 85  | 6         |

### 40W Area Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life



|                |                                                |          |    |     |      |     |       |    |   |
|----------------|------------------------------------------------|----------|----|-----|------|-----|-------|----|---|
| L40ARLEX39U40K | LED 40W 40K HID200 REPLACEMENT LAMP, EX39 BASE | 100-277V | 40 | 200 | 6000 | 150 | 4000K | 85 | 6 |
| L40ARLEX39U50K | LED 40W 50K HID200 REPLACEMENT LAMP, EX39 BASE | 100-277V | 40 | 200 | 6000 | 150 | 5000K | 85 | 6 |

### 60W Area Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life



|                |                                                |          |    |     |      |     |       |    |   |
|----------------|------------------------------------------------|----------|----|-----|------|-----|-------|----|---|
| L60ARLEX39U40K | LED 60W 40K HID250 REPLACEMENT LAMP, EX39 BASE | 100-277V | 60 | 250 | 9000 | 150 | 4000K | 85 | 6 |
| L60ARLEX39U50K | LED 60W 50K HID250 REPLACEMENT LAMP, EX39 BASE | 100-277V | 60 | 250 | 9000 | 150 | 5000K | 85 | 6 |

### 80W Area Lamps – 3-1 Dimming/Sensor Compatible • EX39 Base • 50,000 Rated Life



|               |                                                |          |    |     |       |     |       |    |   |
|---------------|------------------------------------------------|----------|----|-----|-------|-----|-------|----|---|
| L80AREX39U40K | LED 80W 40K HID320 REPLACEMENT LAMP, EX39 BASE | 100-277V | 80 | 320 | 11200 | 150 | 4000K | 85 | 6 |
| L80AREX39U50K | LED 80W 50K HID320 REPLACEMENT LAMP, EX39 BASE | 100-277V | 80 | 320 | 11200 | 150 | 5000K | 85 | 6 |

### 110W Area Lamps – 3-1 Dimming/Sensor Compatible • EX39 Base • 50,000 Rated Life



|                |                                                 |          |     |     |       |     |       |    |   |
|----------------|-------------------------------------------------|----------|-----|-----|-------|-----|-------|----|---|
| L110AREX39U40K | LED 110W 40K HID100 REPLACEMENT LAMP, EX39 BASE | 100-277V | 110 | 400 | 15400 | 150 | 4000K | 85 | 6 |
| L110AREX39U50K | LED 110W 50K HID100 REPLACEMENT LAMP, EX39 BASE | 100-277V | 110 | 400 | 15400 | 150 | 5000K | 85 | 6 |

# LED Corn Cob Lamps

TCP's energy-efficient LED HID Replacement Corn Cob lamps are an excellent choice for replacing traditional high-intensity discharge lamps. They are damp location rated and designed for indoor/outdoor use where low maintenance and high lumen output is required.

## Features & Benefits

- Uses 85% less energy than high-intensity discharge products
- UL approved for damp locations and rated for enclosed fixtures
- 360° beam angle for full light distribution
- Isolated driver for better heat dissipation and eliminating the need for a ballast

## Specifications

|                          |                                            |
|--------------------------|--------------------------------------------|
| Color Temperatures ..... | 4000K, 5000K, 3000K/4000K/5000K Selectable |
| Input Line Voltage.....  | 120 VAC                                    |
| Frequency .....          | 50/60HZ                                    |
| CRI.....                 | 85                                         |
| Base.....                | E26, E39, EX39                             |

| ITEM #                                                                                  | DESCRIPTION | VOLTAGE | WATTS | METAL HALIDE COMPARISON | LUMENS | LPW | CCT | CRI | CASE QTY. | HID ACCS. |  |
|-----------------------------------------------------------------------------------------|-------------|---------|-------|-------------------------|--------|-----|-----|-----|-----------|-----------|--|
| <b>12W HID Replacement Corn Cob Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life</b> |             |         |       |                         |        |     |     |     |           |           |  |



|              |                                     |          |    |    |      |     |       |    |   |    |
|--------------|-------------------------------------|----------|----|----|------|-----|-------|----|---|----|
| L12CCE26U40K | LED 12W 40K CORN COB LAMP, E26 BASE | 100-277V | 12 | 50 | 1800 | 150 | 4000K | 85 | 6 | NO |
| L12CCE26U50K | LED 12W 50K CORN COB LAMP, E26 BASE | 100-277V | 12 | 50 | 1800 | 150 | 5000K | 85 | 6 | NO |

|                                                                                         |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
| <b>18W HID Replacement Corn Cob Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life</b> |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|



|              |                                     |          |    |    |      |     |       |    |   |    |
|--------------|-------------------------------------|----------|----|----|------|-----|-------|----|---|----|
| L18CCE26U40K | LED 18W 40K CORN COB LAMP, E26 BASE | 100-277V | 18 | 75 | 2700 | 150 | 4000K | 85 | 6 | NO |
| L18CCE26U50K | LED 18W 50K CORN COB LAMP, E26 BASE | 100-277V | 18 | 75 | 2700 | 150 | 5000K | 85 | 6 | NO |

|                                                                                         |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
| <b>27W HID Replacement Corn Cob Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life</b> |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|



|              |                                     |          |    |     |      |     |       |    |   |    |
|--------------|-------------------------------------|----------|----|-----|------|-----|-------|----|---|----|
| L27CCE26U40K | LED 27W 40K CORN COB LAMP, E26 BASE | 100-277V | 27 | 100 | 4050 | 150 | 4000K | 85 | 6 | NO |
| L27CCE26U50K | LED 27W 50K CORN COB LAMP, E26 BASE | 100-277V | 27 | 100 | 4050 | 150 | 5000K | 85 | 6 | NO |

|                                                                                         |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
| <b>36W HID Replacement Corn Cob Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life</b> |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|



|              |                                           |          |    |     |      |     |       |    |   |     |
|--------------|-------------------------------------------|----------|----|-----|------|-----|-------|----|---|-----|
| L36CCE26U40K | LED 36W 40K CORN COB LAMP, E26 BASE       | 100-277V | 36 | 175 | 5400 | 150 | 4000K | 85 | 6 | YES |
| L36CCE26U50K | LED 36W 50K CORN COB LAMP, E26 BASE       | 100-277V | 36 | 175 | 5400 | 150 | 5000K | 85 | 6 | YES |
| L36CCE26H40K | LED 36W 40K CORN COB LAMP, E26 BASE, 480V | 277-480V | 36 | 175 | 5400 | 150 | 4000K | 85 | 6 | NO  |
| L36CCE26H50K | LED 36W 50K CORN COB LAMP, E26 BASE, 480V | 277-480V | 36 | 175 | 5400 | 150 | 5000K | 85 | 6 | NO  |

# LED Corn Cob Lamps

## 45W HID Replacement Corn Cob Lamps – Non-Dimmable • E26 Base • 50,000 Rated Life



| ITEM #       | DESCRIPTION                        | VOLTAGE  | WATTS | METAL HALIDE COMPARISON | LUMENS | LPW | CCT   | CRI | CASE QTY. | HID ACCS. |
|--------------|------------------------------------|----------|-------|-------------------------|--------|-----|-------|-----|-----------|-----------|
| L45CCE26U40K | LED 45W 40K CORN COB LAMP E26 BASE | 100-277V | 45    | 200                     | 6750   | 150 | 4000K | 85  | 6         | YES       |
| L45CCE26U50K | LED 45W 50K CORN COB LAMP E26 BASE | 100-277V | 45    | 200                     | 6750   | 150 | 5000K | 85  | 6         | YES       |

## 45W HID Replacement Corn Cob Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life



|               |                                      |          |    |     |      |     |       |    |   |     |
|---------------|--------------------------------------|----------|----|-----|------|-----|-------|----|---|-----|
| L45CCEX39U40K | LED 45W 40K CORN COB LAMP, EX39 BASE | 100-277V | 45 | 200 | 6750 | 150 | 4000K | 85 | 6 | YES |
| L45CCEX39U50K | LED 45W 50K CORN COB LAMP, EX39 BASE | 100-277V | 45 | 200 | 6750 | 150 | 5000K | 85 | 6 | YES |

## 54W HID Replacement Corn Cob Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life



|               |                                                                   |          |    |     |      |       |                           |    |   |     |
|---------------|-------------------------------------------------------------------|----------|----|-----|------|-------|---------------------------|----|---|-----|
| L54CCEX39U40K | LED 54W 40K CORN COB LAMP, EX39 BASE                              | 100-277V | 54 | 250 | 8100 | 150   | 4000K                     | 85 | 6 | YES |
| L54CCEX39U50K | LED 54W 50K CORN COB LAMP, EX39 BASE                              | 100-277V | 54 | 250 | 8100 | 150   | 5000K                     | 85 | 6 | YES |
| L54HX39DS50K  | LED 54W 50K CORN COB LAMP, DARK SKY RATED, EX39 BASE              | 100-277V | 54 | 175 | 5900 | 109.3 | 5000K                     | 80 | 6 | —   |
| L54CCEX39UCCT | LED 54W CCT CORN COB LAMP, EX39 BASE 3000K/4000K/5000K SELECTABLE | 100-277V | 54 | 250 | 7560 | 140.0 | 3000K/<br>4000K/<br>5000K | 80 | 6 | —   |
| L54CCEX39H40K | LED 54W 40K CORN COB LAMP, EX39 BASE, 480V                        | 277-480V | 54 | 250 | 8100 | 150   | 4000K                     | 85 | 6 | NO  |
| L54CCEX39H50K | LED 54W 50K CORN COB LAMP, EX39 BASE, 480V                        | 277-480V | 54 | 250 | 8100 | 150   | 5000K                     | 85 | 6 | NO  |

## 63W HID Replacement Corn Cob Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life



|               |                                      |          |    |     |      |     |       |    |   |     |
|---------------|--------------------------------------|----------|----|-----|------|-----|-------|----|---|-----|
| L63CCEX39U40K | LED 63W 40K CORN COB LAMP, EX39 BASE | 100-277V | 63 | 300 | 9450 | 150 | 4000K | 85 | 6 | YES |
| L63CCEX39U50K | LED 63W 50K CORN COB LAMP, EX39 BASE | 100-277V | 63 | 300 | 9450 | 150 | 5000K | 85 | 6 | YES |

# LED Corn Cob Lamps

## 80W HID Replacement Corn Cob Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life



| ITEM #        | DESCRIPTION                          | VOLTAGE  | WATTS | METAL HALIDE COMPARISON | LUMENS | LPW | CCT   | CRI | CASE QTY. | HID ACCS. |
|---------------|--------------------------------------|----------|-------|-------------------------|--------|-----|-------|-----|-----------|-----------|
| L80CCEX39U40K | LED 80W 40K CORN COB LAMP, EX39 BASE | 100-277V | 80    | 320                     | 12000  | 150 | 4000K | 85  | 6         | YES       |
| L80CCEX39U50K | LED 80W 50K CORN COB LAMP, EX39 BASE | 100-277V | 80    | 320                     | 12000  | 150 | 5000K | 85  | 6         | YES       |

## 100W HID Replacement Corn Cob Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life



|                |                                             |          |     |     |       |     |       |    |   |     |
|----------------|---------------------------------------------|----------|-----|-----|-------|-----|-------|----|---|-----|
| L100CCEX39U40K | LED 100W 40K CORN COB LAMP, EX39 BASE       | 100-277V | 100 | 400 | 15000 | 150 | 4000K | 85 | 6 | YES |
| L100CCEX39U50K | LED 100W 50K CORN COB LAMP, EX39 BASE       | 100-277V | 100 | 400 | 15000 | 150 | 5000K | 85 | 6 | YES |
| L100CCEX39H40K | LED 100W 40K CORN COB LAMP, X39 BASE, 480V  | 277-480V | 100 | 400 | 15000 | 150 | 4000K | 85 | 6 | NO  |
| L100CCEX39H50K | LED 100W 50K CORN COB LAMP, EX39 BASE, 480V | 277-480V | 100 | 400 | 15000 | 150 | 5000K | 85 | 6 | NO  |

## 120W HID Replacement Corn Cob Lamps – Non-Dimmable • EX39 Base • 50,000 Rated Life



|                |                                              |          |     |     |       |     |       |    |   |     |
|----------------|----------------------------------------------|----------|-----|-----|-------|-----|-------|----|---|-----|
| L120CCEX39U40K | LED 120W 40K HID REPLACEMENT LAMP, EX39 BASE | 100-277V | 120 | 500 | 18000 | 150 | 4000K | 85 | 6 | YES |
| L120CCEX39U50K | LED 120W 50K HID REPLACEMENT LAMP, EX39 BASE | 100-277V | 120 | 500 | 18000 | 150 | 5000K | 85 | 6 | YES |

# LED HID Replacement Accessories

## HID HB PIR Occupancy Sensor



LHSIR001

When connected to the TCP HID Replacement Lamp, the sensor delivers motion detection. When motion is detected, the lamp's brightness will be switched to 100% for a preset Hold Time. When no motion is detected, the lamp's brightness will be switched to a preset Dim Level from 0 – 60%. If natural light is present, the lamp will turn off. The PIR Motion Sensor works with the TCP HID Corn Cobs, Area, and High Bay Lamps.

### Features:

- Normal Motion Detecting
- Daylight Threshold
- Step Dimming

### Specifications:

|                           |                             |                             |                             |
|---------------------------|-----------------------------|-----------------------------|-----------------------------|
| Voltage .....             | 15V DC ± 2V                 | Illuminance .....           | Around 3000LUX              |
| Output Voltage .....      | 0-10V                       | Operating Temperature ..... | -20°C – 35°C (-4°F – 95°F)  |
| Current .....             | 20mA                        | Storage Temperature .....   | -20°C – 40°C (-4°F – 104°F) |
| Sensing Angle .....       | 120° (Installed Vertically) | Hold Time Options .....     | 30S/90S/5Min/10Min          |
| Detecting Range .....     | Approx 10m dia              | IP Rating .....             | IP20                        |
| Standby Power Range ..... | 0%/20%/40%/60%              | Warranty .....              | 5 Years                     |

## HID HB Daylight Sensor



LHSDL001

When connected to the TCP HID Replacement Lamp, the sensor provides natural light detection. When the natural light level is above the Lux setting, the lamp will turn off. When the natural light level is below the Lux setting, the lamp will turn on for the preset Hold Time. The Daylight Sensor works with the TCP HID Corn Cobs, Area, and High Bay Lamps.

### Features:

- Only Identify Natural Light
- Daylight Threshold

### Specifications:

|                      |                   |                             |                             |
|----------------------|-------------------|-----------------------------|-----------------------------|
| Voltage .....        | 15V DC ± 2V       | Hold Time .....             | 4 Hrs, 6 Hrs, 10 Hrs, ∞     |
| Output Voltage ..... | 0-10V             | Operating Temperature ..... | -20°C – 60°C (-4°F – 140°F) |
| Current .....        | 20mA              | IP Rating .....             | IP20                        |
| LUX Range .....      | 50, 200, 500, 800 | Warranty .....              | 5 Years                     |

## HID HB Microwave Motion Sensor



LHSMW001

When connected to the TCP HID Replacement Lamp, the sensor delivers motion detection through objects and walls. When motion is detected, the lamp brightness will be switched to 100% for a preset Hold Time. When no motion is detected, the lamp brightness will be switched to a preset Dim Level from 0 – 60%. The Microwave Motion Sensor works with the TCP HID Corn Cobs, Area, and High Bay Lamps.


### Features:

- Normal Motion Detecting
- Step Dimming

### Specifications:

|                      |                             |                             |                             |
|----------------------|-----------------------------|-----------------------------|-----------------------------|
| Frequency .....      | 5.8 GHz ± 75MHz             | Detecting Range .....       | Approx 10m dia              |
| Voltage .....        | 15V DC ± 2V                 | Operating Temperature ..... | -20°C – 35°C (-4°F – 95°F)  |
| Output Voltage ..... | 0-10V                       | Storage Temperature .....   | -20°C – 40°C (-4°F – 104°F) |
| Current .....        | 20mA                        | IP Rating .....             | IP20                        |
| Transmit Power ..... | 1mW                         | Warranty .....              | 5 Years                     |
| Sensing Angle .....  | 120° (Installed Vertically) |                             |                             |

## 3-in-1 Dimming Wire



LHDW001

The 3-in-1 Dimming Wire connects the TCP HID Replacement Lamps to an external dimming system. The TCP HID Replacement Lamps can use three types of external dimming systems to control the lamps: Resistance Dimming, 0-10V Dimming, or Pulse Width Modulation (PWM). The 3-in-1 Dimming Wire works with the TCP HID Corn Cobs, Area, and High Bay Lamps.

### Features:

- Connect lamps to an external dimming system

### Wiring:

- 0-10V Dimming Wiring – Dim+ (GRY) and Dim- (BLK)
- PWM Dimming Wiring – Dim+ (GRY) and Dim- (BLK)
- Resistance Dimming Wiring – Dim+ (GRY), Dim- (BLK) and Vaux (RED)

# LED Filament Lamps

Combining advanced technology with the elegance of an exposed filament aesthetic, TCP's LED filament lamps provide the beauty and style of traditional lamps with the advantage of superior energy savings.

## In this section:

|                                        |                |
|----------------------------------------|----------------|
| High CRI Lamps.....                    | <b>92-97</b>   |
| Good Life Warm Dimming Lamps .....     | <b>98-99</b>   |
| AmberGlow Filament Lamps.....          | <b>100-101</b> |
| Antique Classic Lamps.....             | <b>102-103</b> |
| Shape Filaments .....                  | <b>104</b>     |
| California Quality Filament Lamps..... | <b>105</b>     |



# High CRI Filament Lamps



TCP's LED Filament High CRI Standard Lamps combine the beauty and style of traditional lamps with visual aesthetics of exposed filaments and superior LED energy savings. Exclusive technology provides unmatched longevity and perfect dimming down to 5%. High CRI output provides outstanding color consistency and beautiful, natural color rendering.

## Features & Benefits

- High CRI value provides excellent color rendering results and color consistency while maintaining uniformity
- Uses up to 85% less energy than halogen and incandescent lamps
- UL approved for damp and enclosed fixtures
- Smooth, uniform dimming down to 5%
- All-glass construction

## Specifications

Color Temperatures ..... 2700K, 3000K, 4000K, 5000K  
 Input Line Voltage..... 120 VAC  
 Frequency ..... 50/60HZ  
 Lamp Life (Rated)..... 15,000 hours  
 Minimum Starting Temp ..... -22°F (-30°C)  
 Maximum Operating Temp..... 104°F (40°C)  
 CRI..... 95  
 Base..... E12, E26

| ITEM # | DESCRIPTION | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | BASE | CCT | CRI | FINISH | CASE QTY. |
|--------|-------------|---------|-------|-------------|--------|-----|------|-----|-----|--------|-----------|
|--------|-------------|---------|-------|-------------|--------|-----|------|-----|-----|--------|-----------|

### 4.5W Filament A19 – Dimmable • E26 Base • 15,000 Rated Life



|                   |                               |      |     |    |     |     |     |       |    |       |    |
|-------------------|-------------------------------|------|-----|----|-----|-----|-----|-------|----|-------|----|
| FA19D4027E26SCL95 | LED 4.5W A19 CLEAR 95 CRI 27K | 120V | 4.5 | 40 | 450 | 100 | E26 | 2700K | 95 | CLEAR | 12 |
| FA19D4027E26SFR95 | LED 4.5W A19 FROST 95 CRI 27K | 120V | 4.5 | 40 | 450 | 100 | E26 | 2700K | 95 | FROST | 12 |
| FA19D4030E26SCL95 | LED 4.5W A19 CLEAR 95 CRI 30K | 120V | 4.5 | 40 | 450 | 100 | E26 | 3000K | 95 | CLEAR | 12 |
| FA19D4030E26SFR95 | LED 4.5W A19 FROST 95 CRI 30K | 120V | 4.5 | 40 | 450 | 100 | E26 | 3000K | 95 | FROST | 12 |
| FA19D4040E26SCL95 | LED 4.5W A19 CLEAR 95 CRI 40K | 120V | 4.5 | 40 | 450 | 100 | E26 | 4000K | 95 | CLEAR | 12 |
| FA19D4040E26SFR95 | LED 4.5W A19 FROST 95 CRI 40K | 120V | 4.5 | 40 | 450 | 100 | E26 | 4000K | 95 | FROST | 12 |
| FA19D4050E26SCL95 | LED 4.5W A19 CLEAR 95 CRI 50K | 120V | 4.5 | 40 | 450 | 100 | E26 | 5000K | 95 | CLEAR | 12 |
| FA19D4050E26SFR95 | LED 4.5W A19 FROST 95 CRI 50K | 120V | 4.5 | 40 | 450 | 100 | E26 | 5000K | 95 | FROST | 12 |

### 8W Filament A19 – Dimmable • E26 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |     |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|-----|-----|-------|----|-------|----|
| FA19D6027E26SCL95 | LED 8W A19 CLEAR 95 CRI 27K | 120V | 8 | 60 | 800 | 100 | E26 | 2700K | 95 | CLEAR | 12 |
| FA19D6027E26SFR95 | LED 8W A19 FROST 95 CRI 27K | 120V | 8 | 60 | 800 | 100 | E26 | 2700K | 95 | FROST | 12 |
| FA19D6030E26SCL95 | LED 8W A19 CLEAR 95 CRI 30K | 120V | 8 | 60 | 800 | 100 | E26 | 3000K | 95 | CLEAR | 12 |
| FA19D6030E26SFR95 | LED 8W A19 FROST 95 CRI 30K | 120V | 8 | 60 | 800 | 100 | E26 | 3000K | 95 | FROST | 12 |
| FA19D6040E26SCL95 | LED 8W A19 CLEAR 95 CRI 40K | 120V | 8 | 60 | 800 | 100 | E26 | 4000K | 95 | CLEAR | 12 |
| FA19D6040E26SFR95 | LED 8W A19 FROST 95 CRI 40K | 120V | 8 | 60 | 800 | 100 | E26 | 4000K | 95 | FROST | 12 |
| FA19D6050E26SCL95 | LED 8W A19 CLEAR 95 CRI 50K | 120V | 8 | 60 | 800 | 100 | E26 | 5000K | 95 | CLEAR | 12 |
| FA19D6050E26SFR95 | LED 8W A19 FROST 95 CRI 50K | 120V | 8 | 60 | 800 | 100 | E26 | 5000K | 95 | FROST | 12 |

# High CRI Filament Lamps

## 3W Filament B11 – Dimmable • E12 Base • 15,000 Rated Life



| ITEM #            | DESCRIPTION                 | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | BASE | CCT   | CRI | FINISH | CASE QTY. |
|-------------------|-----------------------------|---------|-------|-------------|--------|------|------|-------|-----|--------|-----------|
| FB11D2527E12SCL95 | LED 3W B11 CLEAR 95 CRI 27K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 2700K | 95  | CLEAR  | 12        |
| FB11D2527E12SFR95 | LED 3W B11 FROST 95 CRI 27K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 2700K | 95  | FROST  | 12        |
| FB11D2530E12SCL95 | LED 3W B11 CLEAR 95 CRI 30K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 3000K | 95  | CLEAR  | 12        |
| FB11D2530E12SFR95 | LED 3W B11 FROST 95 CRI 30K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 3000K | 95  | FROST  | 12        |
| FB11D2540E12SCL95 | LED 3W B11 CLEAR 95 CRI 40K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 4000K | 95  | CLEAR  | 12        |
| FB11D2540E12SFR95 | LED 3W B11 FROST 95 CRI 40K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 4000K | 95  | FROST  | 12        |
| FB11D2550E12SCL95 | LED 3W B11 CLEAR 95 CRI 50K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 5000K | 95  | CLEAR  | 12        |
| FB11D2550E12SFR95 | LED 3W B11 FROST 95 CRI 50K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 5000K | 95  | FROST  | 12        |

## 3W Filament B11 – Dimmable • E26 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |      |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FB11D2527E26SCL95 | LED 3W B11 CLEAR 95 CRI 27K | 120V | 3 | 25 | 250 | 83.3 | E26 | 2700K | 95 | CLEAR | 12 |
| FB11D2527E26SFR95 | LED 3W B11 FROST 95 CRI 27K | 120V | 3 | 25 | 250 | 83.3 | E26 | 2700K | 95 | FROST | 12 |
| FB11D2530E26SCL95 | LED 3W B11 CLEAR 95 CRI 30K | 120V | 3 | 25 | 250 | 83.3 | E26 | 3000K | 95 | CLEAR | 12 |
| FB11D2530E26SFR95 | LED 3W B11 FROST 95 CRI 30K | 120V | 3 | 25 | 250 | 83.3 | E26 | 3000K | 95 | FROST | 12 |
| FB11D2540E26SCL95 | LED 3W B11 CLEAR 95 CRI 40K | 120V | 3 | 25 | 250 | 83.3 | E26 | 4000K | 95 | CLEAR | 12 |
| FB11D2540E26SFR95 | LED 3W B11 FROST 95 CRI 40K | 120V | 3 | 25 | 250 | 83.3 | E26 | 4000K | 95 | FROST | 12 |
| FB11D2550E26SCL95 | LED 3W B11 CLEAR 95 CRI 50K | 120V | 3 | 25 | 250 | 83.3 | E26 | 5000K | 95 | CLEAR | 12 |
| FB11D2550E26SFR95 | LED 3W B11 FROST 95 CRI 50K | 120V | 3 | 25 | 250 | 83.3 | E26 | 5000K | 95 | FROST | 12 |

## 4W Filament B11 – Dimmable • E12 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |    |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|----|-----|-------|----|-------|----|
| FB11D4027E12SCL95 | LED 4W B11 CLEAR 95 CRI 27K | 120V | 4 | 40 | 300 | 75 | E12 | 2700K | 95 | CLEAR | 12 |
| FB11D4027E12SFR95 | LED 4W B11 FROST 95 CRI 27K | 120V | 4 | 40 | 300 | 75 | E12 | 2700K | 95 | FROST | 12 |
| FB11D4030E12SCL95 | LED 4W B11 CLEAR 95 CRI 30K | 120V | 4 | 40 | 300 | 75 | E12 | 3000K | 95 | CLEAR | 12 |
| FB11D4030E12SFR95 | LED 4W B11 FROST 95 CRI 30K | 120V | 4 | 40 | 300 | 75 | E12 | 3000K | 95 | FROST | 12 |
| FB11D4040E12SCL95 | LED 4W B11 CLEAR 95 CRI 40K | 120V | 4 | 40 | 300 | 75 | E12 | 4000K | 95 | CLEAR | 12 |
| FB11D4040E12SFR95 | LED 4W B11 FROST 95 CRI 40K | 120V | 4 | 40 | 300 | 75 | E12 | 4000K | 95 | FROST | 12 |
| FB11D4050E12SCL95 | LED 4W B11 CLEAR 95 CRI 50K | 120V | 4 | 40 | 300 | 75 | E12 | 5000K | 95 | CLEAR | 12 |
| FB11D4050E12SFR95 | LED 4W B11 FROST 95 CRI 50K | 120V | 4 | 40 | 300 | 75 | E12 | 5000K | 95 | FROST | 12 |

## 4W Filament B11 – Dimmable • E26 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |    |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|----|-----|-------|----|-------|----|
| FB11D4027E26SCL95 | LED 4W B11 CLEAR 95 CRI 27K | 120V | 4 | 40 | 300 | 75 | E26 | 2700K | 95 | CLEAR | 12 |
| FB11D4027E26SFR95 | LED 4W B11 FROST 95 CRI 27K | 120V | 4 | 40 | 300 | 75 | E26 | 2700K | 95 | FROST | 12 |
| FB11D4030E26SCL95 | LED 4W B11 CLEAR 95 CRI 30K | 120V | 4 | 40 | 300 | 75 | E26 | 3000K | 95 | CLEAR | 12 |
| FB11D4030E26SFR95 | LED 4W B11 FROST 95 CRI 30K | 120V | 4 | 40 | 300 | 75 | E26 | 3000K | 95 | FROST | 12 |
| FB11D4040E26SCL95 | LED 4W B11 CLEAR 95 CRI 40K | 120V | 4 | 40 | 300 | 75 | E26 | 4000K | 95 | CLEAR | 12 |
| FB11D4040E26SFR95 | LED 4W B11 FROST 95 CRI 40K | 120V | 4 | 40 | 300 | 75 | E26 | 4000K | 95 | FROST | 12 |
| FB11D4050E26SCL95 | LED 4W B11 CLEAR 95 CRI 50K | 120V | 4 | 40 | 300 | 75 | E26 | 5000K | 95 | CLEAR | 12 |
| FB11D4050E26SFR95 | LED 4W B11 FROST 95 CRI 50K | 120V | 4 | 40 | 300 | 75 | E26 | 5000K | 95 | FROST | 12 |

# High CRI Filament Lamps

## 5W Filament B11 – Dimmable • E12 Base • 15,000 Rated Life



| ITEM #            | DESCRIPTION                 | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | BASE | CCT   | CRI | FINISH | CASE QTY. |
|-------------------|-----------------------------|---------|-------|-------------|--------|-----|------|-------|-----|--------|-----------|
| FB11D6027E12SCL95 | LED 5W B11 CLEAR 95 CRI 27K | 120V    | 5     | 60          | 500    | 100 | E12  | 2700K | 95  | CLEAR  | 12        |
| FB11D6027E12SFR95 | LED 5W B11 FROST 95 CRI 27K | 120V    | 5     | 60          | 500    | 100 | E12  | 2700K | 95  | FROST  | 12        |
| FB11D6030E12SCL95 | LED 5W B11 CLEAR 95 CRI 30K | 120V    | 5     | 60          | 500    | 100 | E12  | 3000K | 95  | CLEAR  | 12        |
| FB11D6030E12SFR95 | LED 5W B11 FROST 95 CRI 30K | 120V    | 5     | 60          | 500    | 100 | E12  | 3000K | 95  | FROST  | 12        |
| FB11D6040E12SCL95 | LED 5W B11 CLEAR 95 CRI 40K | 120V    | 5     | 60          | 500    | 100 | E12  | 4000K | 95  | CLEAR  | 12        |
| FB11D6040E12SFR95 | LED 5W B11 FROST 95 CRI 40K | 120V    | 5     | 60          | 500    | 100 | E12  | 4000K | 95  | FROST  | 12        |
| FB11D6050E12SCL95 | LED 5W B11 CLEAR 95 CRI 50K | 120V    | 5     | 60          | 500    | 100 | E12  | 5000K | 95  | CLEAR  | 12        |
| FB11D6050E12SFR95 | LED 5W B11 FROST 95 CRI 50K | 120V    | 5     | 60          | 500    | 100 | E12  | 5000K | 95  | FROST  | 12        |

## 5W Filament B11 – Dimmable • E26 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |     |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|-----|-----|-------|----|-------|----|
| FB11D6027E26SCL95 | LED 5W B11 CLEAR 95 CRI 27K | 120V | 5 | 60 | 500 | 100 | E26 | 2700K | 95 | CLEAR | 12 |
| FB11D6027E26SFR95 | LED 5W B11 FROST 95 CRI 27K | 120V | 5 | 60 | 500 | 100 | E26 | 2700K | 95 | FROST | 12 |
| FB11D6030E26SCL95 | LED 5W B11 CLEAR 95 CRI 30K | 120V | 5 | 60 | 500 | 100 | E26 | 3000K | 95 | CLEAR | 12 |
| FB11D6030E26SFR95 | LED 5W B11 FROST 95 CRI 30K | 120V | 5 | 60 | 500 | 100 | E26 | 3000K | 95 | FROST | 12 |
| FB11D6040E26SCL95 | LED 5W B11 CLEAR 95 CRI 40K | 120V | 5 | 60 | 500 | 100 | E26 | 4000K | 95 | CLEAR | 12 |
| FB11D6040E26SFR95 | LED 5W B11 FROST 95 CRI 40K | 120V | 5 | 60 | 500 | 100 | E26 | 4000K | 95 | FROST | 12 |
| FB11D6050E26SCL95 | LED 5W B11 CLEAR 95 CRI 50K | 120V | 5 | 60 | 500 | 100 | E26 | 5000K | 95 | CLEAR | 12 |
| FB11D6050E26SFR95 | LED 5W B11 FROST 95 CRI 50K | 120V | 5 | 60 | 500 | 100 | E26 | 5000K | 95 | FROST | 12 |

## 3W Filament F11 – Dimmable • E12 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |      |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FF11D2527E12SCL95 | LED 3W F11 CLEAR 95 CRI 27K | 120V | 3 | 25 | 250 | 83.3 | E12 | 2700K | 95 | CLEAR | 12 |
| FF11D2527E12SFR95 | LED 3W F11 FROST 95 CRI 27K | 120V | 3 | 25 | 300 | 100  | E12 | 2700K | 95 | FROST | 12 |
| FF11D2530E12SCL95 | LED 3W F11 CLEAR 95 CRI 30K | 120V | 3 | 25 | 250 | 83.3 | E12 | 3000K | 95 | CLEAR | 12 |
| FF11D2530E12SFR95 | LED 3W F11 FROST 95 CRI 30K | 120V | 3 | 25 | 300 | 100  | E12 | 3000K | 95 | FROST | 12 |
| FF11D2540E12SCL95 | LED 3W F11 CLEAR 95 CRI 40K | 120V | 3 | 25 | 250 | 83.3 | E12 | 4000K | 95 | CLEAR | 12 |
| FF11D2540E12SFR95 | LED 3W F11 FROST 95 CRI 40K | 120V | 3 | 25 | 300 | 100  | E12 | 4000K | 95 | FROST | 12 |
| FF11D2550E12SCL95 | LED 3W F11 CLEAR 95 CRI 50K | 120V | 3 | 25 | 250 | 83.3 | E12 | 5000K | 95 | CLEAR | 12 |
| FF11D2550E12SFR95 | LED 3W F11 FROST 95 CRI 50K | 120V | 3 | 25 | 300 | 100  | E12 | 5000K | 95 | FROST | 12 |

## 3W Filament F11 – Dimmable • E26 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |      |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FF11D2527E26SCL95 | LED 3W F11 CLEAR 95 CRI 27K | 120V | 3 | 25 | 250 | 83.3 | E26 | 2700K | 95 | CLEAR | 12 |
| FF11D2527E26SFR95 | LED 3W F11 FROST 95 CRI 27K | 120V | 3 | 25 | 300 | 100  | E26 | 2700K | 95 | FROST | 12 |
| FF11D2530E26SCL95 | LED 3W F11 CLEAR 95 CRI 30K | 120V | 3 | 25 | 250 | 83.3 | E26 | 3000K | 95 | CLEAR | 12 |
| FF11D2530E26SFR95 | LED 3W F11 FROST 95 CRI 30K | 120V | 3 | 25 | 300 | 100  | E26 | 3000K | 95 | FROST | 12 |
| FF11D2540E26SCL95 | LED 3W F11 CLEAR 95 CRI 40K | 120V | 3 | 25 | 250 | 83.3 | E26 | 4000K | 95 | CLEAR | 12 |
| FF11D2540E26SFR95 | LED 3W F11 FROST 95 CRI 40K | 120V | 3 | 25 | 300 | 100  | E26 | 4000K | 95 | FROST | 12 |
| FF11D2550E26SCL95 | LED 3W F11 CLEAR 95 CRI 50K | 120V | 3 | 25 | 250 | 83.3 | E26 | 5000K | 95 | CLEAR | 12 |
| FF11D2550E26SFR95 | LED 3W F11 FROST 95 CRI 50K | 120V | 3 | 25 | 300 | 100  | E26 | 5000K | 95 | FROST | 12 |

# High CRI Filament Lamps

## 4W Filament F11 – Dimmable • E12 Base • 15,000 Rated Life



| ITEM #            | DESCRIPTION                 | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | BASE | CCT   | CRI | FINISH | CASE QTY. |
|-------------------|-----------------------------|---------|-------|-------------|--------|-----|------|-------|-----|--------|-----------|
| FF11D4027E12SCL95 | LED 4W F11 CLEAR 95 CRI 27K | 120V    | 4     | 40          | 300    | 75  | E12  | 2700K | 95  | CLEAR  | 12        |
| FF11D4027E12SFR95 | LED 4W F11 FROST 95 CRI 27K | 120V    | 4     | 40          | 300    | 75  | E12  | 2700K | 95  | FROST  | 12        |
| FF11D4030E12SCL95 | LED 4W F11 CLEAR 95 CRI 30K | 120V    | 4     | 40          | 300    | 75  | E12  | 3000K | 95  | CLEAR  | 12        |
| FF11D4030E12SFR95 | LED 4W F11 FROST 95 CRI 30K | 120V    | 4     | 40          | 300    | 75  | E12  | 3000K | 95  | FROST  | 12        |
| FF11D4040E12SCL95 | LED 4W F11 CLEAR 95 CRI 40K | 120V    | 4     | 40          | 300    | 75  | E12  | 4000K | 95  | CLEAR  | 12        |
| FF11D4040E12SFR95 | LED 4W F11 FROST 95 CRI 40K | 120V    | 4     | 40          | 300    | 75  | E12  | 4000K | 95  | FROST  | 12        |
| FF11D4050E12SCL95 | LED 4W F11 CLEAR 95 CRI 50K | 120V    | 4     | 40          | 300    | 75  | E12  | 5000K | 95  | CLEAR  | 12        |
| FF11D4050E12SFR95 | LED 4W F11 FROST 95 CRI 50K | 120V    | 4     | 40          | 300    | 75  | E12  | 5000K | 95  | FROST  | 12        |

## 4W Filament F11 – Dimmable • E26 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |    |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|----|-----|-------|----|-------|----|
| FF11D4027E26SCL95 | LED 4W F11 CLEAR 95 CRI 27K | 120V | 4 | 40 | 300 | 75 | E26 | 2700K | 95 | CLEAR | 12 |
| FF11D4027E26SFR95 | LED 4W F11 FROST 95 CRI 27K | 120V | 4 | 40 | 300 | 75 | E26 | 2700K | 95 | FROST | 12 |
| FF11D4030E26SCL95 | LED 4W F11 CLEAR 95 CRI 30K | 120V | 4 | 40 | 300 | 75 | E26 | 3000K | 95 | CLEAR | 12 |
| FF11D4030E26SFR95 | LED 4W F11 FROST 95 CRI 30K | 120V | 4 | 40 | 300 | 75 | E26 | 3000K | 95 | FROST | 12 |
| FF11D4040E26SCL95 | LED 4W F11 CLEAR 95 CRI 40K | 120V | 4 | 40 | 300 | 75 | E26 | 4000K | 95 | CLEAR | 12 |
| FF11D4040E26SFR95 | LED 4W F11 FROST 95 CRI 40K | 120V | 4 | 40 | 300 | 75 | E26 | 4000K | 95 | FROST | 12 |
| FF11D4050E26SCL95 | LED 4W F11 CLEAR 95 CRI 50K | 120V | 4 | 40 | 300 | 75 | E26 | 5000K | 95 | CLEAR | 12 |
| FF11D4050E26SFR95 | LED 4W F11 FROST 95 CRI 50K | 120V | 4 | 40 | 300 | 75 | E26 | 5000K | 95 | FROST | 12 |

## 5W Filament F11 – Dimmable • E12 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |     |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|-----|-----|-------|----|-------|----|
| FF11D4027E12SCL95 | LED 5W F11 CLEAR 95 CRI 27K | 120V | 5 | 60 | 500 | 100 | E12 | 2700K | 95 | CLEAR | 12 |
| FF11D4027E12SFR95 | LED 5W F11 FROST 95 CRI 27K | 120V | 5 | 60 | 500 | 100 | E12 | 2700K | 95 | FROST | 12 |
| FF11D4030E12SCL95 | LED 5W F11 CLEAR 95 CRI 30K | 120V | 5 | 60 | 500 | 100 | E12 | 3000K | 95 | CLEAR | 12 |
| FF11D4030E12SFR95 | LED 5W F11 FROST 95 CRI 30K | 120V | 5 | 60 | 500 | 100 | E12 | 3000K | 95 | FROST | 12 |
| FF11D4040E12SCL95 | LED 5W F11 CLEAR 95 CRI 40K | 120V | 5 | 60 | 500 | 100 | E12 | 4000K | 95 | CLEAR | 12 |
| FF11D4040E12SFR95 | LED 5W F11 FROST 95 CRI 40K | 120V | 5 | 60 | 500 | 100 | E12 | 4000K | 95 | FROST | 12 |
| FF11D4050E12SCL95 | LED 5W F11 CLEAR 95 CRI 50K | 120V | 5 | 60 | 500 | 100 | E12 | 5000K | 95 | CLEAR | 12 |
| FF11D4050E12SFR95 | LED 5W F11 FROST 95 CRI 50K | 120V | 5 | 60 | 500 | 100 | E12 | 5000K | 95 | FROST | 12 |

## 5W Filament F11 – Dimmable • E26 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |     |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|-----|-----|-------|----|-------|----|
| FF11D4027E26SCL95 | LED 5W F11 CLEAR 95 CRI 27K | 120V | 5 | 60 | 500 | 100 | E26 | 2700K | 95 | CLEAR | 12 |
| FF11D4027E26SFR95 | LED 5W F11 FROST 95 CRI 27K | 120V | 5 | 60 | 500 | 100 | E26 | 2700K | 95 | FROST | 12 |
| FF11D4030E26SCL95 | LED 5W F11 CLEAR 95 CRI 30K | 120V | 5 | 60 | 500 | 100 | E26 | 3000K | 95 | CLEAR | 12 |
| FF11D4030E26SFR95 | LED 5W F11 FROST 95 CRI 30K | 120V | 5 | 60 | 500 | 100 | E26 | 3000K | 95 | FROST | 12 |
| FF11D4040E26SCL95 | LED 5W F11 CLEAR 95 CRI 40K | 120V | 5 | 60 | 500 | 100 | E26 | 4000K | 95 | CLEAR | 12 |
| FF11D4040E26SFR95 | LED 5W F11 FROST 95 CRI 40K | 120V | 5 | 60 | 500 | 100 | E26 | 4000K | 95 | FROST | 12 |
| FF11D4050E26SCL95 | LED 5W F11 CLEAR 95 CRI 50K | 120V | 5 | 60 | 500 | 100 | E26 | 5000K | 95 | CLEAR | 12 |
| FF11D4050E26SFR95 | LED 5W F11 FROST 95 CRI 50K | 120V | 5 | 60 | 500 | 100 | E26 | 5000K | 95 | FROST | 12 |

# High CRI Filament Lamps

## 3W Filament G16 – Dimmable • E12 Base • 15,000 Rated Life



| ITEM #            | DESCRIPTION                 | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | BASE | CCT   | CRI | FINISH | CASE QTY. |
|-------------------|-----------------------------|---------|-------|-------------|--------|------|------|-------|-----|--------|-----------|
| FG16D2527E12SCL95 | LED 3W G16 CLEAR 95 CRI 27K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 2700K | 95  | CLEAR  | 12        |
| FG16D2527E12SFR95 | LED 3W G16 FROST 95 CRI 27K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 2700K | 95  | FROST  | 12        |
| FG16D2530E12SCL95 | LED 3W G16 CLEAR 95 CRI 30K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 3000K | 95  | CLEAR  | 12        |
| FG16D2530E12SFR95 | LED 3W G16 FROST 95 CRI 30K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 3000K | 95  | FROST  | 12        |
| FG16D2540E12SCL95 | LED 3W G16 CLEAR 95 CRI 40K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 4000K | 95  | CLEAR  | 12        |
| FG16D2540E12SFR95 | LED 3W G16 FROST 95 CRI 40K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 4000K | 95  | FROST  | 12        |
| FG16D2550E12SCL95 | LED 3W G16 CLEAR 95 CRI 50K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 5000K | 95  | CLEAR  | 12        |
| FG16D2550E12SFR95 | LED 3W G16 FROST 95 CRI 50K | 120V    | 3     | 25          | 250    | 83.3 | E12  | 5000K | 95  | FROST  | 12        |

## 3W Filament G16 – Dimmable • E26 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |      |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FG16D2527E26SCL95 | LED 3W G16 CLEAR 95 CRI 27K | 120V | 3 | 25 | 250 | 83.3 | E26 | 2700K | 95 | CLEAR | 12 |
| FG16D2527E26SFR95 | LED 3W G16 FROST 95 CRI 27K | 120V | 3 | 25 | 250 | 83.3 | E26 | 2700K | 95 | FROST | 12 |
| FG16D2530E26SCL95 | LED 3W G16 CLEAR 95 CRI 30K | 120V | 3 | 25 | 250 | 83.3 | E26 | 3000K | 95 | CLEAR | 12 |
| FG16D2530E26SFR95 | LED 3W G16 FROST 95 CRI 30K | 120V | 3 | 25 | 250 | 83.3 | E26 | 3000K | 95 | FROST | 12 |
| FG16D2540E26SCL95 | LED 3W G16 CLEAR 95 CRI 40K | 120V | 3 | 25 | 250 | 83.3 | E26 | 4000K | 95 | CLEAR | 12 |
| FG16D2540E26SFR95 | LED 3W G16 FROST 95 CRI 40K | 120V | 3 | 25 | 250 | 83.3 | E26 | 4000K | 95 | FROST | 12 |
| FG16D2550E26SCL95 | LED 3W G16 CLEAR 95 CRI 50K | 120V | 3 | 25 | 250 | 83.3 | E26 | 5000K | 95 | CLEAR | 12 |
| FG16D2550E26SFR95 | LED 3W G16 FROST 95 CRI 50K | 120V | 3 | 25 | 250 | 83.3 | E26 | 5000K | 95 | FROST | 12 |

## 4W Filament G16 – Dimmable • E12 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |      |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FG16D4027E12SCL95 | LED 4W G16 CLEAR 95 CRI 27K | 120V | 4 | 25 | 250 | 83.3 | E12 | 2700K | 95 | CLEAR | 12 |
| FG16D4027E12SFR95 | LED 4W G16 FROST 95 CRI 27K | 120V | 4 | 25 | 250 | 83.3 | E12 | 2700K | 95 | FROST | 12 |
| FG16D4030E12SCL95 | LED 4W G16 CLEAR 95 CRI 30K | 120V | 4 | 25 | 250 | 83.3 | E12 | 3000K | 95 | CLEAR | 12 |
| FG16D4030E12SFR95 | LED 4W G16 FROST 95 CRI 30K | 120V | 4 | 25 | 250 | 83.3 | E12 | 3000K | 95 | FROST | 12 |
| FG16D4040E12SCL95 | LED 4W G16 CLEAR 95 CRI 40K | 120V | 4 | 25 | 250 | 83.3 | E12 | 4000K | 95 | CLEAR | 12 |
| FG16D4040E12SFR95 | LED 4W G16 FROST 95 CRI 40K | 120V | 4 | 25 | 250 | 83.3 | E12 | 4000K | 95 | FROST | 12 |
| FG16D4050E12SCL95 | LED 4W G16 CLEAR 95 CRI 50K | 120V | 4 | 25 | 250 | 83.3 | E12 | 5000K | 95 | CLEAR | 12 |
| FG16D4050E12SFR95 | LED 4W G16 FROST 95 CRI 50K | 120V | 4 | 25 | 250 | 83.3 | E12 | 5000K | 95 | FROST | 12 |

## 4W Filament G16 – Dimmable • E26 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |      |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FG16D4027E26SCL95 | LED 4W G16 CLEAR 95 CRI 27K | 120V | 4 | 25 | 250 | 83.3 | E26 | 2700K | 95 | CLEAR | 12 |
| FG16D4027E26SFR95 | LED 4W G16 FROST 95 CRI 27K | 120V | 4 | 25 | 250 | 83.3 | E26 | 2700K | 95 | FROST | 12 |
| FG16D4030E26SCL95 | LED 4W G16 CLEAR 95 CRI 30K | 120V | 4 | 25 | 250 | 83.3 | E26 | 3000K | 95 | CLEAR | 12 |
| FG16D4030E26SFR95 | LED 4W G16 FROST 95 CRI 30K | 120V | 4 | 25 | 250 | 83.3 | E26 | 3000K | 95 | FROST | 12 |
| FG16D4040E26SCL95 | LED 4W G16 CLEAR 95 CRI 40K | 120V | 4 | 25 | 250 | 83.3 | E26 | 4000K | 95 | CLEAR | 12 |
| FG16D4040E26SFR95 | LED 4W G16 FROST 95 CRI 40K | 120V | 4 | 25 | 250 | 83.3 | E26 | 4000K | 95 | FROST | 12 |
| FG16D4050E26SCL95 | LED 4W G16 CLEAR 95 CRI 50K | 120V | 4 | 25 | 250 | 83.3 | E26 | 5000K | 95 | CLEAR | 12 |
| FG16D4050E26SFR95 | LED 4W G16 FROST 95 CRI 50K | 120V | 4 | 25 | 250 | 83.3 | E26 | 5000K | 95 | FROST | 12 |

# High CRI Filament Lamps

## 4W Filament G25 – Dimmable • E26 Base • 15,000 Rated Life



| ITEM #            | DESCRIPTION                 | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | BASE | CCT   | CRI | FINISH | CASE QTY. |
|-------------------|-----------------------------|---------|-------|-------------|--------|------|------|-------|-----|--------|-----------|
| FG25D4027E26SCL95 | LED 4W G25 CLEAR 95 CRI 27K | 120V    | 4     | 40          | 350    | 87.5 | E26  | 2700K | 95  | CLEAR  | 12        |
| FG25D4027E26SFR95 | LED 4W G25 FROST 95 CRI 27K | 120V    | 4     | 40          | 350    | 87.5 | E26  | 2700K | 95  | FROST  | 12        |
| FG25D4030E26SCL95 | LED 4W G25 CLEAR 95 CRI 30K | 120V    | 4     | 40          | 350    | 87.5 | E26  | 3000K | 95  | CLEAR  | 12        |
| FG25D4030E26SFR95 | LED 4W G25 FROST 95 CRI 30K | 120V    | 4     | 40          | 350    | 87.5 | E26  | 3000K | 95  | FROST  | 12        |
| FG25D4040E26SCL95 | LED 4W G25 CLEAR 95 CRI 40K | 120V    | 4     | 40          | 350    | 87.5 | E26  | 4000K | 95  | CLEAR  | 12        |
| FG25D4040E26SFR95 | LED 4W G25 FROST 95 CRI 40K | 120V    | 4     | 40          | 350    | 87.5 | E26  | 4000K | 95  | FROST  | 12        |
| FG25D4050E26SCL95 | LED 4W G25 CLEAR 95 CRI 50K | 120V    | 4     | 40          | 350    | 87.5 | E26  | 5000K | 95  | CLEAR  | 12        |
| FG25D4050E26SFR95 | LED 4W G25 FROST 95 CRI 50K | 120V    | 4     | 40          | 350    | 87.5 | E26  | 5000K | 95  | FROST  | 12        |

## 4.5W Filament G40 – Dimmable • E26 Base • 15,000 Rated Life



|                   |                               |      |     |    |     |     |     |       |    |       |    |
|-------------------|-------------------------------|------|-----|----|-----|-----|-----|-------|----|-------|----|
| FG40D4027E26SCL95 | LED 4.5W G40 CLEAR 95 CRI 27K | 120V | 4.5 | 40 | 450 | 100 | E26 | 2700K | 95 | CLEAR | 12 |
| FG40D4027E26SFR95 | LED 4.5W G40 FROST 95 CRI 27K | 120V | 4.5 | 40 | 450 | 100 | E26 | 2700K | 95 | FROST | 12 |
| FG40D4030E26SCL95 | LED 4.5W G40 CLEAR 95 CRI 30K | 120V | 4.5 | 40 | 450 | 100 | E26 | 3000K | 95 | CLEAR | 12 |
| FG40D4030E26SFR95 | LED 4.5W G40 FROST 95 CRI 30K | 120V | 4.5 | 40 | 450 | 100 | E26 | 3000K | 95 | FROST | 12 |
| FG40D4040E26SCL95 | LED 4.5W G40 CLEAR 95 CRI 40K | 120V | 4.5 | 40 | 450 | 100 | E26 | 4000K | 95 | CLEAR | 12 |
| FG40D4040E26SFR95 | LED 4.5W G40 FROST 95 CRI 40K | 120V | 4.5 | 40 | 450 | 100 | E26 | 4000K | 95 | FROST | 12 |
| FG40D4050E26SCL95 | LED 4.5W G40 CLEAR 95 CRI 50K | 120V | 4.5 | 40 | 450 | 100 | E26 | 5000K | 95 | CLEAR | 12 |
| FG40D4050E26SFR95 | LED 4.5W G40 FROST 95 CRI 50K | 120V | 4.5 | 40 | 450 | 100 | E26 | 5000K | 95 | FROST | 12 |

## 5W Filament ST19 – Dimmable • E26 Base • 15,000 Rated Life



|                    |                              |      |   |    |     |    |     |       |    |       |    |
|--------------------|------------------------------|------|---|----|-----|----|-----|-------|----|-------|----|
| FST19D4027E26SCL95 | LED 5W ST19 CLEAR 95 CRI 27K | 120V | 5 | 40 | 450 | 90 | E26 | 2700K | 95 | CLEAR | 12 |
| FST19D4027E26SFR95 | LED 5W ST19 FROST 95 CRI 27K | 120V | 5 | 40 | 450 | 90 | E26 | 2700K | 95 | FROST | 12 |
| FST19D4030E26SCL95 | LED 5W ST19 CLEAR 95 CRI 30K | 120V | 5 | 40 | 450 | 90 | E26 | 3000K | 95 | CLEAR | 12 |
| FST19D4030E26SFR95 | LED 5W ST19 FROST 95 CRI 30K | 120V | 5 | 40 | 450 | 90 | E26 | 3000K | 95 | FROST | 12 |
| FST19D4040E26SCL95 | LED 5W ST19 CLEAR 95 CRI 40K | 120V | 5 | 40 | 450 | 90 | E26 | 4000K | 95 | CLEAR | 12 |
| FST19D4040E26SFR95 | LED 5W ST19 FROST 95 CRI 40K | 120V | 5 | 40 | 450 | 90 | E26 | 4000K | 95 | FROST | 12 |
| FST19D4050E26SCL95 | LED 5W ST19 CLEAR 95 CRI 50K | 120V | 5 | 40 | 450 | 90 | E26 | 5000K | 95 | CLEAR | 12 |
| FST19D4050E26SFR95 | LED 5W ST19 FROST 95 CRI 50K | 120V | 5 | 40 | 450 | 90 | E26 | 5000K | 95 | FROST | 12 |

## 3W Filament T6 – Dimmable • E12 Base • 15,000 Rated Life



|                     |                            |      |   |    |     |      |     |       |    |       |    |
|---------------------|----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FT0603D2527EE12CL95 | LED 3W T6 CLEAR 95 CRI 27K | 120V | 3 | 25 | 200 | 66.7 | E12 | 2700K | 95 | CLEAR | 12 |
| FT0603D2527EE12FR95 | LED 3W T6 FROST 95 CRI 27K | 120V | 3 | 25 | 200 | 66.7 | E12 | 2700K | 95 | FROST | 12 |

## 3W Filament T10 – Dimmable • E26 Base • 15,000 Rated Life



|                     |                             |      |   |    |     |      |     |       |    |       |    |
|---------------------|-----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FT1005D2530E26SCL95 | LED 3W T10 95 CRI 30K CLEAR | 120V | 3 | 25 | 250 | 83.3 | E26 | 3000K | 95 | CLEAR | 12 |
| FT1005D2530E26SFR95 | LED 3W T10 95 CRI 30K FROST | 120V | 3 | 25 | 250 | 83.3 | E26 | 3000K | 95 | FROST | 12 |
| FT1005D2550E26SCL95 | LED 3W T10 95 CRI 50K CLEAR | 120V | 3 | 25 | 250 | 83.3 | E26 | 5000K | 95 | CLEAR | 12 |
| FT1005D2550E26SFR95 | LED 3W T10 95 CRI 50K FROST | 120V | 3 | 25 | 250 | 83.3 | E26 | 5000K | 95 | FROST | 12 |

# Good Life Warm Dimming Filament Lamps



TCP Good Life Filament Lamps provide a superior warm dimming experience when compared to other dimmable LED lamps. As the lamps dim, the color temperature transitions from a soft white light color to a warm amber glow, mimicking the dimming effect of incandescent and halogen bulbs.

## Features & Benefits

- Lamps come in a variety of shapes, wattages, and in two different light spectrums: 2700K to 1800K and 3200K to 1800K
- Uses up to 85% less energy than halogen and incandescent lamps
- UL approved for damp and enclosed fixtures
- Smooth, uniform dimming down to 5%
- All-glass construction

## Specifications

|                        |                               |
|------------------------|-------------------------------|
| Color Temperatures     | .....2700K–1800K, 3200K–1800K |
| Input Line Voltage     | ..... 120 VAC                 |
| Frequency              | .....50/60HZ                  |
| Lamp Life (Rated)      | ..... 15,000 hours            |
| Minimum Starting Temp  | ..... -4°F (-30°C)            |
| Maximum Operating Temp | ..... 104°F (40°C)            |
| CRI                    | .....≥80                      |
| Base                   | ..... E12, E26                |

### 3.5W A15 Filament Lamp – Dimmable • E26 Base • 15,000 Rated Life



| ITEM #      | DESCRIPTION                   | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | BASE | CCT         | CRI | CASE QTY. |
|-------------|-------------------------------|---------|-------|-------------|--------|------|------|-------------|-----|-----------|
| FA15D25GL27 | LED 3.5W FIL A15, 2700K-1800K | 120V    | 3.5   | 25          | 300    | 85.7 | E26  | 2700K-1800K | >80 | 12        |

### 8W A19 Filament Lamp – Dimmable • E26 Base • 15,000 Rated Life



|             |                             |      |   |    |     |     |     |             |    |    |
|-------------|-----------------------------|------|---|----|-----|-----|-----|-------------|----|----|
| FA19D60GL27 | LED 8W FIL A19, 2700K-1800K | 120V | 8 | 60 | 800 | 100 | E26 | 2700K-1800K | 80 | 12 |
| FA19D60GL1  | LED 8W FIL A19, 3200K-1800K | 120V | 8 | 60 | 800 | 100 | E26 | 3200K-1800K | 80 | 12 |

### 5W R20 Filament Lamp – Dimmable • E26 Base • 15,000 Rated Life



|             |                             |      |   |    |     |    |     |             |     |    |
|-------------|-----------------------------|------|---|----|-----|----|-----|-------------|-----|----|
| FR20D50GL27 | LED 5W FIL R20, 2700K-1800K | 120V | 5 | 50 | 450 | 90 | E26 | 2700K-1800K | >80 | 12 |
|-------------|-----------------------------|------|---|----|-----|----|-----|-------------|-----|----|

### 8W BR30 Filament Lamp – Dimmable • E26 Base • 15,000 Rated Life



|              |                              |      |   |    |     |      |     |             |    |    |
|--------------|------------------------------|------|---|----|-----|------|-----|-------------|----|----|
| FBR30D65GL27 | LED 8W FIL BR30, 2700K-1800K | 120V | 8 | 65 | 650 | 81.3 | E26 | 2700K-1800K | 90 | 12 |
| FBR30D65GL1  | LED 8W FIL BR30, 3200K-1800K | 120V | 8 | 65 | 650 | 81.3 | E26 | 3200K-1800K | 90 | 12 |

# Good Life Warm Dimming Filament Lamps

## Candelabra Filament Lamps – Dimmable • E12 Base • 15,000 Rated Life



| ITEM #         | DESCRIPTION                 | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | BASE | CCT         | CRI | CASE QTY. |
|----------------|-----------------------------|---------|-------|-------------|--------|------|------|-------------|-----|-----------|
| FB11D60FRGL1   | LED 5W FIL B11, 3200K-1800K | 120V    | 5     | 60          | 500    | 100  | E12  | 3200K-1800K | 80  | 12        |
| FF11D60FRGL1   | LED 5W FIL F11, 3200K-1800K | 120V    | 5     | 60          | 500    | 100  | E12  | 3200K-1800K | 80  | 12        |
| FB11D60FRGL27  | LED 5W FIL B11, 2700K-1800K | 120V    | 5     | 60          | 500    | 100  | E12  | 2700K-1800K | 80  | 12        |
| FB11D40FRGL127 | LED 4W FIL B11, 2700K-1800K | 120V    | 4     | 40          | 250    | 62.5 | E12  | 2700K-1800K | 80  | 12        |

## G25 Filament Lamps – Dimmable • E26 Base • 15,000 Rated Life



|             |                             |      |   |    |     |      |     |             |    |    |
|-------------|-----------------------------|------|---|----|-----|------|-----|-------------|----|----|
| FG25D60GL27 | LED 5W FIL G25, 2700K-1800K | 120V | 5 | 40 | 500 | 100  | E26 | 2700K-1800K | 80 | 12 |
| FG25D25GL27 | LED 3W FIL G25, 2700K-1800K | 120V | 3 | 25 | 250 | 83.3 | E26 | 2700K-1800K | 80 | 12 |
| FG25D60GL1  | LED 5W FIL G25, 3200K-1800K | 120V | 5 | 40 | 500 | 100  | E26 | 3200K-1800K | 80 | 12 |

## 8W G40 Filament Lamps – Dimmable • E26 Base • 15,000 Rated Life



|            |                             |      |   |    |     |     |     |             |    |    |
|------------|-----------------------------|------|---|----|-----|-----|-----|-------------|----|----|
| FG40D60GL1 | LED 8W FIL G40, 3200K-1800K | 120V | 8 | 60 | 800 | 100 | E26 | 3200K-1800K | 80 | 12 |
|------------|-----------------------------|------|---|----|-----|-----|-----|-------------|----|----|

## 8W ST19 Filament Lamps – Dimmable • E26 Base • 15,000 Rated Life



|              |                              |      |   |    |     |      |     |             |    |    |
|--------------|------------------------------|------|---|----|-----|------|-----|-------------|----|----|
| FST19D60GL27 | LED 8W FIL ST19, 2700K-1800K | 120V | 8 | 60 | 500 | 62.5 | E26 | 2700K-1800K | 80 | 12 |
| FST19D60GL1  | LED 8W FIL ST19, 3200K-1800K | 120V | 8 | 60 | 500 | 62.5 | E26 | 3200K-1800K | 80 | 12 |

# AmberGlow Filament Lamps

## AmberGlow

TCP's AmberGlow Filament Lamps provide a warm light that most closely resembles traditional incandescent lighting. Exclusive technology provides unmatched longevity and perfect 5 to 100% dimming. High CRI output provides outstanding color consistency and rendering combined with filament elegance and uniform light output.

### Features & Benefits

- Color temperature of 2400K is the closest match to traditional incandescent lighting
- Uses up to 80% less energy than halogen and incandescent lamps
- Unique filament LED configuration provides uniform color output
- Smooth, uniform dimming down to 5%
- All-glass construction

### Specifications

|                             |               |
|-----------------------------|---------------|
| Color Temperatures .....    | 2400K         |
| Input Line Voltage.....     | 120 VAC       |
| Frequency .....             | 50/60HZ       |
| Lamp Life (Rated).....      | 15,000 hours  |
| Minimum Starting Temp ..... | -22°F (-30°C) |
| Maximum Operating Temp..... | 104°F (40°C)  |
| CRI.....                    | ≥92           |
| Base.....                   | E12, E26      |

| ITEM # | DESCRIPTION | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | BASE | CCT | CRI | FINISH | CASE QTY. |
|--------|-------------|---------|-------|-------------|--------|-----|------|-----|-----|--------|-----------|
|--------|-------------|---------|-------|-------------|--------|-----|------|-----|-----|--------|-----------|

#### A19 Filaments – Dimmable • E26 Base • 15,000 Rated Life



|                   |                              |      |     |    |     |     |     |       |    |       |    |
|-------------------|------------------------------|------|-----|----|-----|-----|-----|-------|----|-------|----|
| FA19D4024E26SCL92 | LED 4.5W A19 24K CLEAR 92CRI | 120V | 4.5 | 40 | 450 | 100 | E26 | 2400K | 92 | CLEAR | 12 |
| FA19D4024E26SFR92 | LED 4.5W A19 24K FROST 92CRI | 120V | 4.5 | 40 | 450 | 100 | E26 | 2400K | 92 | FROST | 12 |
| FA19D6024E26SCL92 | LED 8W A19 24K CLEAR 92CRI   | 120V | 8   | 60 | 800 | 100 | E26 | 2400K | 92 | CLEAR | 12 |
| FA19D6024E26SFR92 | LED 8W A19 24K FROST 92CRI   | 120V | 8   | 60 | 800 | 100 | E26 | 2400K | 92 | FROST | 12 |

#### ST19 Filaments – Dimmable • E26 Base • 15,000 Rated Life



|                    |                             |      |   |    |     |    |     |       |    |       |    |
|--------------------|-----------------------------|------|---|----|-----|----|-----|-------|----|-------|----|
| FST19D4024E26SCL92 | LED 5W ST19 24K CLEAR 92CRI | 120V | 5 | 40 | 450 | 90 | E26 | 2400K | 92 | CLEAR | 12 |
| FST19D4024E26SFR92 | LED 5W ST19 24K FROST 92CRI | 120V | 5 | 40 | 450 | 90 | E26 | 2400K | 92 | FROST | 12 |

#### G40 Filaments – Dimmable • E26 Base • 15,000 Rated Life



|                   |                              |      |     |    |     |     |     |       |    |       |    |
|-------------------|------------------------------|------|-----|----|-----|-----|-----|-------|----|-------|----|
| FG40D4024E26SCL92 | LED 4.5W G40 24K CLEAR 92CRI | 120V | 4.5 | 40 | 450 | 100 | E26 | 2400K | 92 | CLEAR | 12 |
| FG40D4024E26SFR92 | LED 4.5W G40 24K FROST 92CRI | 120V | 4.5 | 40 | 450 | 100 | E26 | 2400K | 92 | FROST | 12 |

#### G25 Filaments – Dimmable • E26 Base • 15,000 Rated Life



|                   |                              |      |     |    |     |     |     |       |    |       |    |
|-------------------|------------------------------|------|-----|----|-----|-----|-----|-------|----|-------|----|
| FG25D4024E26SCL92 | LED 4.5W G25 24K CLEAR 92CRI | 120V | 4.5 | 40 | 450 | 100 | E26 | 2400K | 92 | CLEAR | 12 |
| FG25D4024E26SFR92 | LED 4.5W G25 24K FROST 92CRI | 120V | 4.5 | 40 | 450 | 100 | E26 | 2400K | 92 | FROST | 12 |

#### G16 Filaments – Dimmable • E26 Base • 15,000 Rated Life



|                   |                            |      |   |    |     |      |     |       |    |       |    |
|-------------------|----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FG16D2524E26SCL92 | LED 3W G16 24K CLEAR 92CRI | 120V | 3 | 25 | 250 | 83.3 | E26 | 2400K | 92 | CLEAR | 12 |
| FG16D2524E26SFR92 | LED 3W G16 24K FROST 92CRI | 120V | 3 | 25 | 250 | 83.3 | E26 | 2400K | 92 | FROST | 12 |
| FG16D4024E26SCL92 | LED 4W G16 24K CLEAR 92CRI | 120V | 4 | 40 | 350 | 87.5 | E26 | 2400K | 92 | CLEAR | 12 |
| FG16D4024E26SFR92 | LED 4W G16 24K FROST 92CRI | 120V | 4 | 40 | 350 | 87.5 | E26 | 2400K | 92 | FROST | 12 |

100

For the most up-to-date specs and warranty information, please visit [www.tcp.com](http://www.tcp.com)



RoHS COMPLIANT

3 YEAR WARRANTY  
\*Based on 12 hours use per day

# AmberGlow Filament Lamps

## G16 Filaments – Dimmable • E12 Base • 15,000 Rated Life



| ITEM #            | DESCRIPTION                | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | BASE | CCT   | CRI | FINISH | CASE QTY. |
|-------------------|----------------------------|---------|-------|-------------|--------|------|------|-------|-----|--------|-----------|
| FG16D2524E12SCL92 | LED 3W G16 24K CLEAR 92CRI | 120V    | 3     | 25          | 250    | 83.3 | E12  | 2400K | 92  | CLEAR  | 12        |
| FG16D2524E12SFR92 | LED 3W G16 24K FROST 92CRI | 120V    | 3     | 25          | 250    | 83.3 | E12  | 2400K | 92  | FROST  | 12        |
| FG16D4024E12SCL92 | LED 4W G16 24K CLEAR 92CRI | 120V    | 4     | 40          | 350    | 87.5 | E12  | 2400K | 92  | CLEAR  | 12        |
| FG16D4024E12SFR92 | LED 4W G16 24K FROST 92CRI | 120V    | 4     | 40          | 350    | 87.5 | E12  | 2400K | 92  | FROST  | 12        |

## B11 Filaments – Dimmable • E12 Base • 15,000 Rated Life



|                   |                            |      |   |    |     |      |     |       |    |       |    |
|-------------------|----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FB11D2524E12SCL92 | LED 3W B11 24K CLEAR 92CRI | 120V | 3 | 25 | 250 | 83.3 | E12 | 2400K | 92 | CLEAR | 12 |
| FB11D2524E12SFR92 | LED 3W B11 24K FROST 92CRI | 120V | 3 | 25 | 250 | 83.3 | E12 | 2400K | 92 | FROST | 12 |
| FB11D4024E12SCL92 | LED 4W B11 24K CLEAR 92CRI | 120V | 4 | 40 | 300 | 75   | E12 | 2400K | 92 | CLEAR | 12 |
| FB11D4024E12SFR92 | LED 4W B11 24K FROST 92CRI | 120V | 4 | 40 | 300 | 75   | E12 | 2400K | 92 | FROST | 12 |
| FB11D6024E12SCL92 | LED 5W B11 24K CLEAR 92CRI | 120V | 5 | 60 | 500 | 100  | E12 | 2400K | 92 | CLEAR | 12 |
| FB11D6024E12SFR92 | LED 5W B11 24K FROST 92CRI | 120V | 5 | 60 | 500 | 100  | E12 | 2400K | 92 | FROST | 12 |

## B11 Filaments – Dimmable • E26 Base • 15,000 Rated Life



|                   |                            |      |   |    |     |      |     |       |    |       |    |
|-------------------|----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FB11D2524E26SCL92 | LED 3W B11 24K CLEAR 92CRI | 120V | 3 | 25 | 250 | 83.3 | E26 | 2400K | 92 | CLEAR | 12 |
| FB11D2524E26SFR92 | LED 3W B11 24K FROST 92CRI | 120V | 3 | 25 | 250 | 83.3 | E26 | 2400K | 92 | FROST | 12 |
| FB11D4024E26SCL92 | LED 4W B11 24K CLEAR 92CRI | 120V | 4 | 40 | 300 | 75   | E26 | 2400K | 92 | CLEAR | 12 |
| FB11D4024E26SFR92 | LED 4W B11 24K FROST 92CRI | 120V | 4 | 40 | 300 | 75   | E26 | 2400K | 92 | FROST | 12 |
| FB11D6024E26SCL92 | LED 5W B11 24K CLEAR 92CRI | 120V | 5 | 60 | 500 | 100  | E26 | 2400K | 92 | CLEAR | 12 |
| FB11D6024E26SFR92 | LED 5W B11 24K FROST 92CRI | 120V | 5 | 60 | 500 | 100  | E26 | 2400K | 92 | FROST | 12 |

## F11 Filaments – Dimmable • E12 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |      |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FF11D2524E12SCL92 | LED 3W F11 24K CLEAR 92CRI  | 120V | 3 | 25 | 250 | 83.3 | E12 | 2400K | 92 | CLEAR | 12 |
| FF11D2524E12SFR92 | LED 3W F11 24K FROST 92CRI  | 120V | 3 | 25 | 250 | 83.3 | E12 | 2400K | 92 | FROST | 12 |
| FF11D4024E12SCL92 | LED 4W F11 24K CLEAR 92CRI  | 120V | 4 | 40 | 300 | 75   | E12 | 2400K | 92 | CLEAR | 12 |
| FF11D4024E12SFR92 | LED 4W F11 24K FROST, 92CRI | 120V | 4 | 40 | 300 | 75   | E12 | 2400K | 92 | FROST | 12 |
| FF11D6024E12SCL92 | LED 5W F11 24K CLEAR 92CRI  | 120V | 5 | 60 | 500 | 100  | E12 | 2400K | 92 | CLEAR | 12 |
| FF11D6024E12SFR92 | LED 5W F11 24K FROST 92CRI  | 120V | 5 | 60 | 500 | 100  | E12 | 2400K | 92 | FROST | 12 |

## F11 Filaments – Dimmable • E26 Base • 15,000 Rated Life



|                   |                             |      |   |    |     |      |     |       |    |       |    |
|-------------------|-----------------------------|------|---|----|-----|------|-----|-------|----|-------|----|
| FF11D2524E26SCL92 | LED 3W F11 24K CLEAR 92CRI  | 120V | 3 | 25 | 250 | 83.3 | E26 | 2400K | 92 | CLEAR | 12 |
| FF11D2524E26SFR92 | LED 3W F11 24K FROST 92CRI  | 120V | 3 | 25 | 250 | 83.3 | E26 | 2400K | 92 | FROST | 12 |
| FF11D4024E26SCL92 | LED 4W F11 24K CLEAR 92CRI  | 120V | 4 | 40 | 300 | 75   | E26 | 2400K | 92 | CLEAR | 12 |
| FF11D4024E26SFR92 | LED 4W F11 24K FROST, 92CRI | 120V | 4 | 40 | 300 | 75   | E26 | 2400K | 92 | FROST | 12 |
| FF11D6024E26SCL92 | LED 5W F11 24K CLEAR 92CRI  | 120V | 5 | 60 | 500 | 100  | E26 | 2400K | 92 | CLEAR | 12 |
| FF11D6024E26SFR92 | LED 5W F11 24K FROST 92CRI  | 120V | 5 | 60 | 500 | 100  | E26 | 2400K | 92 | FROST | 12 |

# Antique Filament Lamps



TCP Antique Filament Lamps bring a touch of vintage style to any atmosphere. These lamps, which replicate the look of an incandescent lamp, come in a clear glass finish with either filament strips or a spiral filament, producing an extra soft antique glow.

## Features & Benefits

- Available in a variety of bulb shapes with either filament strips or spirals and 1800K color temperature
- Uses up to 85% less energy than halogen and incandescent lamps
- UL approved for damp and enclosed fixtures
- All-glass construction

## Specifications

|                             |               |
|-----------------------------|---------------|
| Color Temperatures .....    | 1800K         |
| Input Line Voltage.....     | 120 VAC       |
| Frequency .....             | 50/60HZ       |
| Lamp Life (Rated).....      | 15,000 hours  |
| Minimum Starting Temp ..... | -22°F (-30°C) |
| Maximum Operating Temp..... | 104°F (40°C)  |
| CRI.....                    | >80           |
| Base.....                   | E12, E26      |

### 4.5W A19 Soft Antique Classic Filament – Dimmable • E26 Base • 15,000 Rated Life



| ITEM #      | DESCRIPTION              | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | BASE | CCT   | CRI | FINISH | CASE QTY. |
|-------------|--------------------------|---------|-------|-------------|--------|------|------|-------|-----|--------|-----------|
| FA19D4018EC | LED 4.5W A19 1800K CLEAR | 120V    | 4.5   | 40          | 325    | 72.2 | E26  | 1800K | >80 | CLEAR  | 12        |

### 4W B11 Soft Antique Classic Filament – Dimmable • E12 Base • 15,000 Rated Life



|               |                        |      |   |    |     |      |     |       |     |       |    |
|---------------|------------------------|------|---|----|-----|------|-----|-------|-----|-------|----|
| FB11D4018E12C | LED 4W B11 1800K CLEAR | 120V | 4 | 40 | 210 | 52.5 | E12 | 1800K | >80 | CLEAR | 12 |
|---------------|------------------------|------|---|----|-----|------|-----|-------|-----|-------|----|

### 4W F11 Soft Antique Classic Filament – Dimmable • E12 Base • 15,000 Rated Life



|               |                        |      |   |    |     |      |     |       |     |       |    |
|---------------|------------------------|------|---|----|-----|------|-----|-------|-----|-------|----|
| FF11D4018E12C | LED 4W F11 1800K CLEAR | 120V | 4 | 40 | 210 | 52.5 | E12 | 1800K | >80 | CLEAR | 12 |
|---------------|------------------------|------|---|----|-----|------|-----|-------|-----|-------|----|

### 4W G25 Soft Antique Classic Filament – Dimmable • E26 Base • 15,000 Rated Life



|             |                        |      |   |    |     |      |     |       |     |       |    |
|-------------|------------------------|------|---|----|-----|------|-----|-------|-----|-------|----|
| FG25D4018EC | LED 4W G25 1800K CLEAR | 120V | 4 | 40 | 210 | 52.5 | E26 | 1800K | >80 | CLEAR | 12 |
|-------------|------------------------|------|---|----|-----|------|-----|-------|-----|-------|----|

### 5W ST19 Soft Antique Classic Filament – Dimmable • E26 Base • 15,000 Rated Life



|              |                         |      |   |    |     |    |     |       |     |       |    |
|--------------|-------------------------|------|---|----|-----|----|-----|-------|-----|-------|----|
| FST19D4018EC | LED 5W ST19 1800K CLEAR | 120V | 5 | 40 | 325 | 65 | E26 | 1800K | >80 | CLEAR | 12 |
|--------------|-------------------------|------|---|----|-----|----|-----|-------|-----|-------|----|

# Antique Filament Lamps

| ITEM #                                                                                | DESCRIPTION     | VOLTAGE                        | WATTS | WATT EQUIV. | LUMENS | LPW | BASE | CCT | CRI   | FINISH | CASE QTY. |    |
|---------------------------------------------------------------------------------------|-----------------|--------------------------------|-------|-------------|--------|-----|------|-----|-------|--------|-----------|----|
| <b>5W T10 Soft Antique Classic Filament – Dimmable • E26 Base • 15,000 Rated Life</b> |                 |                                |       |             |        |     |      |     |       |        |           |    |
|      | FT1005D4018EC   | T10 5W 1800K CLEAR             | 120V  | 5           | 40     | 315 | 63   | E26 | 1800K | >80    | CLEAR     | 12 |
| <b>3W T6 Soft Antique Classic Filament – Dimmable • E12 Base • 15,000 Rated Life</b>  |                 |                                |       |             |        |     |      |     |       |        |           |    |
|      | FT0603D2518E12C | LED 3W T6 1800K CLEAR          | 120V  | 3           | 25     | 150 | 50   | E12 | 1800K | >80    | CLEAR     | 12 |
| <b>5W A19 Soft Antique Spiral Filament – Dimmable • E26 Base • 15,000 Rated Life</b>  |                 |                                |       |             |        |     |      |     |       |        |           |    |
|      | FA19D2518VC     | LED 5W A19 SPIRAL 1800K CLEAR  | 120V  | 5           | 25     | 220 | 45   | E26 | 1800K | >80    | CLEAR     | 12 |
| <b>3W B10 Soft Antique Spiral Filament – Dimmable • E26 Base • 15,000 Rated Life</b>  |                 |                                |       |             |        |     |      |     |       |        |           |    |
|     | FB10D2518VC     | LED 3W B10 SPIRAL 1800K CLEAR  | 120V  | 3           | 25     | 90  | 30   | E26 | 1800K | >80    | CLEAR     | 12 |
| <b>5W G30 Soft Antique Spiral Filament – Dimmable • E26 Base • 15,000 Rated Life</b>  |                 |                                |       |             |        |     |      |     |       |        |           |    |
|    | FG30D2518VC     | LED 5W G30 SPIRAL 1800K CLEAR  | 120V  | 5           | 25     | 240 | 48   | E26 | 1800K | >80    | CLEAR     | 12 |
| <b>5W G40 Soft Antique Spiral Filament – Dimmable • E26 Base • 15,000 Rated Life</b>  |                 |                                |       |             |        |     |      |     |       |        |           |    |
|    | FG40D2518VC     | LED 5W G40 SPIRAL 1800K CLEAR  | 120V  | 5           | 25     | 240 | 48   | E26 | 1800K | >80    | CLEAR     | 12 |
| <b>5W ST19 Soft Antique Spiral Filament – Dimmable • E26 Base • 15,000 Rated Life</b> |                 |                                |       |             |        |     |      |     |       |        |           |    |
|    | FST19D2518VC    | LED 5W ST19 SPIRAL 1800K CLEAR | 120V  | 5           | 25     | 240 | 48   | E26 | 1800K | >80    | CLEAR     | 12 |
| <b>5W T9 Soft Antique Spiral Filament – Dimmable • E26 Base • 15,000 Rated Life</b>   |                 |                                |       |             |        |     |      |     |       |        |           |    |
|    | FT09D2518VC     | LED 5W T9 SPIRAL 1800K CLEAR   | 120V  | 5           | 25     | 240 | 48   | E26 | 1800K | >80    | CLEAR     | 12 |

# Shape Filament Lamps

## SHAPE FILAMENT



**TCP Shape Filament Lamps are the perfect way to light up your business!**

Work with our team to design a custom bulb (A19 or G40) with your company logo or name. With base up or base down options along with your choice of filament colors, the possibilities for customization are endless.



Sample filament designs for inspiration.

### Features & Benefits

- Available in two lamp shapes, A19 or G40
- LED filaments come in a variety of different colors, images, phrases, and shapes
- Uses up to 85% less energy than halogen and incandescent lamps
- UL approved for damp locations when protected from the elements
- All-glass construction

### Specifications

|                             |               |
|-----------------------------|---------------|
| Input Line Voltage.....     | 120 VAC       |
| Frequency .....             | 60HZ          |
| Lamp Life (Rated).....      | 15,000 hours  |
| Minimum Starting Temp ..... | -22°F (-30°C) |
| Maximum Operating Temp..... | 104°F (40°C)  |
| CRI.....                    | ≥80           |
| Base.....                   | E26           |

**Contact your sales rep to work with our development team to create your custom light bulb.**

# California Quality Filament Lamps

TCP's California Quality High CRI LED line offers exceptional color consistency and rendering while meeting all requirements for Title 24 JA8-2019-E.

## Features & Benefits

- Uses up to 80% less energy than halogen and incandescent lamps
- UL approved for damp and enclosed fixtures
- Smooth, uniform dimming down to 5%
- All-glass construction
- Meets California Title 24 JA8-2019-E

## Specifications

|                             |                |
|-----------------------------|----------------|
| Color Temperatures .....    | 2700K, 3000K   |
| Input Line Voltage.....     | 120 VAC        |
| Frequency .....             | 50/60HZ        |
| Lamp Life (Rated).....      | 15,000 hours   |
| Minimum Starting Temp ..... | -7.6°F (-22°C) |
| Maximum Operating Temp..... | 113°F (45°C)   |
| CRI.....                    | 90             |
| Base.....                   | E12, E26       |

### 9W Filament A19 – Dimmable • E26 Base • 15,000 Rated Life



| ITEM #           | DESCRIPTION             | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | BASE | CCT   | CRI | FINISH | CASE QTY. |
|------------------|-------------------------|---------|-------|-------------|--------|------|------|-------|-----|--------|-----------|
| LFF60A19D1527KCQ | CQ LED 9W A19 FROST 27K | 120V    | 9     | 60          | 810    | 90   | E26  | 2700K | 90  | FROST  | 12        |
| LFF60A19D1530KCQ | CQ LED 9W A19 FROST 30K | 120V    | 9     | 60          | 850    | 94.4 | E26  | 3000K | 90  | FROST  | 12        |

### 4.5W Filament B11 – Dimmable • E12 Base • 15,000 Rated Life



|               |                           |      |     |    |     |      |     |       |    |       |    |
|---------------|---------------------------|------|-----|----|-----|------|-----|-------|----|-------|----|
| FB11D4027ECCQ | CQ LED 4.5W B11 CLEAR 27K | 120V | 4.5 | 40 | 300 | 66.7 | E12 | 2700K | 90 | CLEAR | 12 |
|---------------|---------------------------|------|-----|----|-----|------|-----|-------|----|-------|----|

### 4.5W Filament G16 – Dimmable • E12 Base • 15,000 Rated Life



|               |                           |      |     |    |     |    |     |       |    |       |    |
|---------------|---------------------------|------|-----|----|-----|----|-----|-------|----|-------|----|
| FG16D4027EFCQ | CQ LED 4.5W G16 FROST 27K | 120V | 4.5 | 40 | 360 | 80 | E12 | 2700K | 90 | FROST | 12 |
| FG16D4027ECCQ | CQ LED 4.5W G16 CLEAR 27K | 120V | 4.5 | 40 | 360 | 80 | E12 | 2700K | 90 | CLEAR | 12 |

### 4.5W Filament G25 – Dimmable • E26 Base • 15,000 Rated Life



|              |                           |      |     |    |     |      |     |       |    |       |    |
|--------------|---------------------------|------|-----|----|-----|------|-----|-------|----|-------|----|
| FG25D4027FCQ | CQ LED 4.5W G25 FROST 27K | 120V | 4.5 | 40 | 350 | 77.8 | E26 | 2700K | 90 | FROST | 12 |
| FG25D4027CCQ | CQ LED 4.5W G25 CLEAR 27K | 120V | 4.5 | 40 | 350 | 77.8 | E26 | 2700K | 90 | CLEAR | 12 |

### 5W Filament T10 – Dimmable • E26 Base • 15,000 Rated Life



|                |                         |      |   |    |     |    |     |       |    |       |    |
|----------------|-------------------------|------|---|----|-----|----|-----|-------|----|-------|----|
| FT1005D4027CCQ | CQ LED 5W T10 CLEAR 27K | 120V | 5 | 40 | 450 | 90 | E26 | 2700K | 90 | CLEAR | 12 |
|----------------|-------------------------|------|---|----|-----|----|-----|-------|----|-------|----|

### 4.2W Filament ST19 – Dimmable • E26 Base • 15,000 Rated Life





|               |                            |      |     |    |     |      |     |       |    |       |    |
|---------------|----------------------------|------|-----|----|-----|------|-----|-------|----|-------|----|
| FST19D4027CCQ | CQ LED 4.2W ST19 CLEAR 27K | 120V | 4.2 | 40 | 350 | 83.3 | E26 | 2700K | 90 | CLEAR | 12 |
|---------------|----------------------------|------|-----|----|-----|------|-----|-------|----|-------|----|





# LED Lamps

TCP's lamps run the gamut for every application: residential, retail, and commercial. With traditional and custom shapes, we feel confident that you will find the right light for your space.

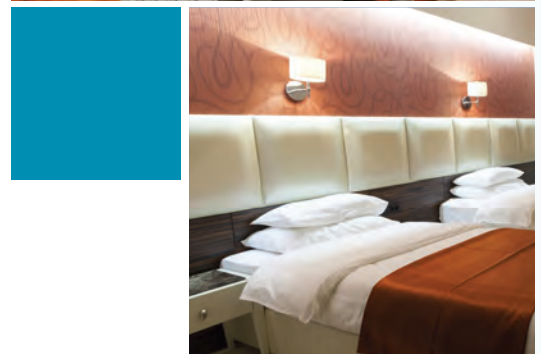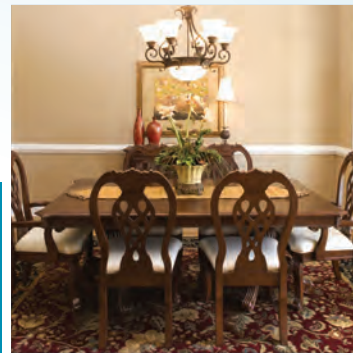

## In this section:

|                          |                |
|--------------------------|----------------|
| LED PAR Lamps .....      | <b>108-116</b> |
| LED BR Lamps .....       | <b>117-118</b> |
| LED A Lamps.....         | <b>119-121</b> |
| LED MR16 Lamps.....      | <b>122-123</b> |
| LED Deco Lamps.....      | <b>124-125</b> |
| 120-277V LED Lamps.....  | <b>126-127</b> |
| Allusion LED Lamps ..... | <b>128</b>     |
| Pro Line LED Lamps ..... | <b>129</b>     |
| LED PL Lamps .....       | <b>130-134</b> |
| LED Accent Lamps .....   | <b>135</b>     |
| LED Elevator Lamps.....  | <b>136</b>     |

# LED PAR Lamps

TCP's award winning PAR lamps combine traditional beauty with top-notch technology. With a wide variety of options available, you can be sure to find the perfect PAR lamp to meet your needs.

## Features & Benefits

- Up to 85% more efficient than incandescent/halogen replacements, providing instant energy savings
- Wet location rated for outdoor use
- Available in Spot (15°), Narrow Flood (25°), Flood (40°), and Wide Flood (60°) Beam Angles for every application

## Specifications

Color Temperatures ..... 2400K, 2700K, 3000K, 3500K, 4100K, 5000K  
 Input Line Voltage..... 120 VAC  
 Frequency ..... 50/60HZ  
 CRI..... 80, 90  
 Base..... E26

### 30W High Lumen Elite PAR38 – Dimmable • E26 Base • 25,000 Rated Life



| ITEM #          | DESCRIPTION                  | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | CBCP   | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|-----------------|------------------------------|---------|-------|-------------|--------|-----|--------|------------|-------|-----|-----------|
| L30P38D2527KSP  | 30W HIGH LUMEN P38 - 27K 15° | 120V    | 30    | 250         | 2700   | 90  | 20,745 | 15         | 2700K | 80  | 12        |
| L30P38D2527KNFL | 30W HIGH LUMEN P38 - 27K 25° | 120V    | 30    | 250         | 2700   | 90  | 9,955  | 25         | 2700K | 80  | 12        |
| L30P38D2527KFL  | 30W HIGH LUMEN P38 - 27K 40° | 120V    | 30    | 250         | 2700   | 90  | 6,340  | 40         | 2700K | 80  | 12        |
| L30P38D2530KSP  | 30W HIGH LUMEN P38 - 30K 15° | 120V    | 30    | 250         | 3000   | 100 | 22,233 | 15         | 3000K | 80  | 12        |
| L30P38D2530KNFL | 30W HIGH LUMEN P38 - 30K 25° | 120V    | 30    | 250         | 3000   | 100 | 10,794 | 25         | 3000K | 80  | 12        |
| L30P38D2530KFL  | 30W HIGH LUMEN P38 - 30K 40° | 120V    | 30    | 250         | 3000   | 100 | 6,414  | 40         | 3000K | 80  | 12        |
| L30P38D2535KSP  | 30W HIGH LUMEN P38 - 35K 15° | 120V    | 30    | 250         | 3000   | 100 | 23,322 | 15         | 3500K | 80  | 12        |
| L30P38D2535KNFL | 30W HIGH LUMEN P38 - 35K 25° | 120V    | 30    | 250         | 3000   | 100 | 10,990 | 25         | 3500K | 80  | 12        |
| L30P38D2535KFL  | 30W HIGH LUMEN P38 - 35K 40° | 120V    | 30    | 250         | 3000   | 100 | 6,845  | 40         | 3500K | 80  | 12        |
| L30P38D2541KSP  | 30W HIGH LUMEN P38 - 41K 15° | 120V    | 30    | 250         | 3000   | 100 | 21,740 | 15         | 4100K | 80  | 12        |
| L30P38D2541KNFL | 30W HIGH LUMEN P38 - 41K 25° | 120V    | 30    | 250         | 3000   | 100 | 10,665 | 25         | 4100K | 80  | 12        |
| L30P38D2541KFL  | 30W HIGH LUMEN P38 - 41K 40° | 120V    | 30    | 250         | 3000   | 100 | 6,483  | 40         | 4100K | 80  | 12        |
| L30P38D2550KSP  | 30W HIGH LUMEN P38 - 50K 15° | 120V    | 30    | 250         | 3000   | 100 | 23,126 | 15         | 5000K | 80  | 12        |
| L30P38D2550KNFL | 30W HIGH LUMEN P38 - 50K 25° | 120V    | 30    | 250         | 3000   | 100 | 11,284 | 25         | 5000K | 80  | 12        |
| L30P38D2550KFL  | 30W HIGH LUMEN P38 - 50K 40° | 120V    | 30    | 250         | 3000   | 100 | 6,637  | 40         | 5000K | 80  | 12        |

### 28W High Lumen Elite PAR38 – Non-Dimmable • E26 Base • 95 CRI • 25,000 Rated Life



|                    |                        |          |    |     |      |       |       |    |       |    |    |
|--------------------|------------------------|----------|----|-----|------|-------|-------|----|-------|----|----|
| L28P38N25UNV27KNFL | 28W P38 ND UNV 27K NFL | 120-277V | 28 | 250 | 3000 | 107.1 | 8423  | 25 | 2700K | 95 | 12 |
| L28P38N25UNV27KFL  | 28W P38 ND UNV 27K FL  | 120-277V | 28 | 250 | 3000 | 107.1 | 5,354 | 40 | 2700K | 95 | 12 |
| L28P38N25UNV30KNFL | 28W P38 ND UNV 30K NFL | 120-277V | 28 | 250 | 3100 | 110.7 | —     | 25 | 3000K | 95 | 12 |
| L28P38N25UNV30KFL  | 28W P38 ND UNV 30K FL  | 120-277V | 28 | 250 | 3100 | 110.7 | 5,543 | 40 | 3000K | 95 | 12 |
| L28P38N25UNV35KNFL | 28W P38 ND UNV 35K NFL | 120-277V | 28 | 250 | 3100 | 110.7 | —     | 25 | 3500K | 95 | 12 |
| L28P38N25UNV35KFL  | 28W P38 ND UNV 35K FL  | 120-277V | 28 | 250 | 3100 | 110.7 | 4,916 | 40 | 3500K | 95 | 12 |
| L28P38N25UNV41KNFL | 28W P38 ND UNV 41K NFL | 120-277V | 28 | 250 | 3100 | 110.7 | —     | 25 | 4100K | 95 | 12 |
| L28P38N25UNV41KFL  | 28W P38 ND UNV 41K FL  | 120-277V | 28 | 250 | 3100 | 110.7 | 5,739 | 40 | 4100K | 95 | 12 |
| L28P38N25UNV50KNFL | 28W P38 ND UNV 50K NFL | 120-277V | 28 | 250 | 3100 | 110.7 | 8616  | 25 | 5000K | 95 | 12 |
| L28P38N25UNV50KFL  | 28W P38 ND UNV 50K FL  | 120-277V | 28 | 250 | 3100 | 110.7 | 5,749 | 40 | 5000K | 95 | 12 |



# LED PAR Lamps

## 18.5W High Output Elite PAR38 – Dimmable • E26 Base • 25,000 Rated Life



| ITEM #             | DESCRIPTION                         | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW   | CBCP  | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|--------------------|-------------------------------------|---------|-------|-------------|--------|-------|-------|------------|-------|-----|-----------|
| LED17HOP38D27KFL   | 18.5W HIGH OUTPUT P38 - 27K 40°     | 120V    | 18.5  | 150         | 1800   | 97.3  | 4346  | 40         | 2700K | 80  | 12        |
| LED17HOP38D27KNFL  | 18.5W HIGH OUTPUT P38 - 27K 25°     | 120V    | 18.5  | 150         | 1800   | 97.3  | 9299  | 25         | 2700K | 80  | 12        |
| LED17HOP38D27KSP   | 18.5W HIGH OUTPUT P38 - 27K 15°     | 120V    | 18.5  | 150         | 1800   | 97.3  | 21535 | 15         | 2700K | 80  | 12        |
| LED17HOP38D27KSPB  | 18.5W HIGH OUTPUT P38 - 27K 15° BLK | 120V    | 18.5  | 150         | 1800   | 97.3  | 21535 | 15         | 2700K | 80  | 12        |
| LED17HOP38D30KFL   | 18.5W HIGH OUTPUT P38 - 30K 40°     | 120V    | 18.5  | 150         | 1825   | 98.6  | 4365  | 40         | 3000K | 80  | 12        |
| LED17HOP38D30KFLB  | 18.5W HIGH OUTPUT P38 - 30K 40° BLK | 120V    | 18.5  | 150         | 1825   | 98.6  | 4365  | 40         | 3000K | 80  | 12        |
| LED17HOP38D30KNFL  | 18.5W HIGH OUTPUT P38 - 30K 25°     | 120V    | 18.5  | 150         | 1825   | 98.6  | 12782 | 25         | 3000K | 80  | 12        |
| LED17HOP38D30KNFLB | 18.5W HIGH OUTPUT P38 - 30K 25° BLK | 120V    | 18.5  | 150         | 1825   | 98.6  | 12782 | 25         | 3000K | 80  | 12        |
| LED17HOP38D30KSP   | 18.5W HIGH OUTPUT P38 - 30K 15°     | 120V    | 18.5  | 150         | 1825   | 98.6  | 23699 | 15         | 3000K | 80  | 12        |
| LED17HOP38D30KSPB  | 18.5W HIGH OUTPUT P38 - 30K 15° BLK | 120V    | 18.5  | 150         | 1825   | 98.6  | 23699 | 15         | 3000K | 80  | 12        |
| LED17HOP38D35KFL   | 18.5W HIGH OUTPUT P38 - 35K 40°     | 120V    | 18.5  | 150         | 1850   | 100   | 4365  | 40         | 3500K | 80  | 12        |
| LED17HOP38D35KFLB  | 18.5W HIGH OUTPUT P38 - 35K 40° BLK | 120V    | 18.5  | 150         | 1850   | 100   | 4365  | 40         | 3500K | 80  | 12        |
| LED17HOP38D35KWFL  | 18.5W HIGH OUTPUT P38 - 35K 60°     | 120V    | 18.5  | 150         | 1850   | 100   | —     | 60         | 3500K | 80  | 12        |
| LED17HOP38D35KNFL  | 18.5W HIGH OUTPUT P38 - 35K 15°     | 120V    | 18.5  | 150         | 1850   | 100   | 12782 | 15         | 3500K | 80  | 12        |
| LED17HOP38D35KSP   | 18.5W HIGH OUTPUT P38 - 35K 25°     | 120V    | 18.5  | 150         | 1850   | 100   | 23685 | 25         | 3500K | 80  | 12        |
| LED17HOP38D41KFL   | 18.5W HIGH OUTPUT P38 - 41K 40°     | 120V    | 18.5  | 150         | 1900   | 102.7 | 4604  | 40         | 4100K | 80  | 12        |
| LED17HOP38D41KNFL  | 18.5W HIGH OUTPUT P38 - 41K 25°     | 120V    | 18.5  | 150         | 1900   | 102.7 | 11614 | 25         | 4100K | 80  | 12        |
| LED17HOP38D41KSP   | 18.5W HIGH OUTPUT P38 - 41K 15°     | 120V    | 18.5  | 150         | 1900   | 102.7 | 22458 | 15         | 4100K | 80  | 12        |
| LED17HOP38D50KFL   | 18.5W HIGH OUTPUT P38 - 50K 40°     | 120V    | 18.5  | 150         | 2000   | 108.1 | 4446  | 40         | 5000K | 80  | 12        |
| LED17HOP38D50KNFL  | 18.5W HIGH OUTPUT P38 - 50K 25°     | 120V    | 18.5  | 150         | 2000   | 108.1 | 12467 | 25         | 5000K | 80  | 12        |
| LED17HOP38D50KSP   | 18.5W HIGH OUTPUT P38 - 50K 15°     | 120V    | 18.5  | 150         | 2000   | 108.1 | 21535 | 15         | 5000K | 80  | 12        |

## 15W Elite PAR38 – Dimmable • E26 Base • 25,000 Rated Life



|                  |                             |      |    |     |      |    |      |    |       |    |    |
|------------------|-----------------------------|------|----|-----|------|----|------|----|-------|----|----|
| LED17P38D24KFL   | 15W PAR38 - 24K 40°         | 120V | 15 | 120 | 1050 | 70 | 2132 | 40 | 2400K | 80 | 12 |
| LED17P38D24KNFL  | 15W PAR38 - 24K 25°         | 120V | 15 | 120 | 1050 | 70 | 4750 | 25 | 2400K | 80 | 12 |
| LED17P38D24KSP   | 15W PAR38 - 24K 15°         | 120V | 15 | 120 | 1050 | 70 | 6937 | 15 | 2400K | 80 | 12 |
| LED17P38D27KFL   | 15W PAR38 - 27K 40°         | 120V | 15 | 120 | 1200 | 80 | 2563 | 40 | 2700K | 80 | 12 |
| LED17P38D27KFLB  | 15W PAR38 - 27K 40° - BLACK | 120V | 15 | 120 | 1200 | 80 | 2563 | 40 | 2700K | 80 | 12 |
| LED17P38D27KNFL  | 15W PAR38 - 27K 25°         | 120V | 15 | 120 | 1200 | 80 | 5710 | 25 | 2700K | 80 | 12 |
| LED17P38D27KSP   | 15W PAR38 - 27K 15°         | 120V | 15 | 120 | 1200 | 80 | 8338 | 15 | 2700K | 80 | 12 |
| LED17P38D30KFL   | 15W PAR38 - 30K 40°         | 120V | 15 | 120 | 1200 | 80 | 3107 | 40 | 3000K | 80 | 12 |
| LED17P38D30KFLB  | 15W PAR38 - 30K 40° - BLACK | 120V | 15 | 120 | 1200 | 80 | 3107 | 40 | 3000K | 80 | 12 |
| LED17P38D30KNFL  | 15W PAR38 - 30K 25°         | 120V | 15 | 120 | 1200 | 80 | 6130 | 25 | 3000K | 80 | 12 |
| LED17P38D30KNFLB | 15W PAR38 - 30K 25° - BLACK | 120V | 15 | 120 | 1200 | 80 | 6130 | 25 | 3000K | 80 | 12 |
| LED17P38D30KSP   | 15W PAR38 - 30K 15°         | 120V | 15 | 120 | 1200 | 80 | 8658 | 15 | 3000K | 80 | 12 |
| LED17P38D30KSPB  | 15W PAR38 - 30K 15° - BLACK | 120V | 15 | 120 | 1200 | 80 | 8658 | 15 | 3000K | 80 | 12 |
| LED17P38D30KWFLB | 15W PAR38 - 30K 60° - BLACK | 120V | 15 | 120 | 1200 | 80 | —    | 60 | 3000K | 80 | 12 |
| LED17P38D35KFL   | 15W PAR38 - 35K 40°         | 120V | 15 | 120 | 1200 | 80 | 3607 | 40 | 3500K | 80 | 12 |
| LED17P38D35KFLB  | 15W PAR38 - 35K 40° - BLACK | 120V | 15 | 120 | 1200 | 80 | 3607 | 40 | 3500K | 80 | 12 |
| LED17P38D35KNFL  | 15W PAR38 - 35K 25°         | 120V | 15 | 120 | 1200 | 80 | 6130 | 25 | 3500K | 80 | 12 |



# LED PAR Lamps

## 15W Elite PAR38 – Dimmable • E26 Base • 25,000 Rated Life (continued)



| ITEM #           | DESCRIPTION                 | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | CBCP  | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|------------------|-----------------------------|---------|-------|-------------|--------|-----|-------|------------|-------|-----|-----------|
| LED17P38D35KNFLB | 15W PAR38 - 35K 25° - BLACK | 120V    | 15    | 120         | 1200   | 80  | 6130  | 25         | 3500K | 80  | 12        |
| LED17P38D35KSP   | 15W PAR38 - 35K 15°         | 120V    | 15    | 120         | 1200   | 80  | 8658  | 15         | 3500K | 80  | 12        |
| LED17P38D41KFL   | 15W PAR38 - 41K 40°         | 120V    | 15    | 120         | 1200   | 80  | 2870  | 40         | 4100K | 80  | 12        |
| LED17P38D41KFLB  | 15W PAR38 - 41K 40° - BLACK | 120V    | 15    | 120         | 1200   | 80  | 2870  | 40         | 4100K | 80  | 12        |
| LED17P38D41KNFL  | 15W PAR38 - 41K 25°         | 120V    | 15    | 120         | 1200   | 80  | 9288  | 25         | 4100K | 80  | 12        |
| LED17P38D41KNFLB | 15W PAR38 - 41K 25° - BLACK | 120V    | 15    | 120         | 1200   | 80  | 9288  | 25         | 4100K | 80  | 12        |
| LED17P38D41KSP   | 15W PAR38 - 41K 15°         | 120V    | 15    | 120         | 1200   | 80  | 18408 | 15         | 4100K | 80  | 12        |
| LED17P38D41KSPB  | 15W PAR38 - 41K 15° - BLACK | 120V    | 15    | 120         | 1200   | 80  | 18408 | 15         | 4100K | 80  | 12        |
| LED17P38D50KFL   | 15W PAR38 - 50K 40°         | 120V    | 15    | 120         | 1200   | 80  | 2713  | 40         | 5000K | 80  | 12        |
| LED17P38D50KFLB  | 15W PAR38 - 50K 40° - BLACK | 120V    | 15    | 120         | 1200   | 80  | 2713  | 40         | 5000K | 80  | 12        |
| LED17P38D50KNFL  | 15W PAR38 - 50K 25°         | 120V    | 15    | 120         | 1200   | 80  | 9387  | 25         | 5000K | 80  | 12        |
| LED17P38D50KSP   | 15W PAR38 - 50K 15°         | 120V    | 15    | 120         | 1200   | 80  | 19721 | 15         | 5000K | 80  | 12        |

## 13.5W Elite PAR38 – Dimmable • E26 Base • 25,000 Rated Life



|                  |                               |      |      |    |      |      |       |    |       |    |    |
|------------------|-------------------------------|------|------|----|------|------|-------|----|-------|----|----|
| LED14P38D24KFL   | 13.5W PAR38 - 24K 40°         | 120V | 13.5 | 90 | 1000 | 75   | —     | 40 | 2400K | 80 | 12 |
| LED14P38D24KNFL  | 13.5W PAR38 - 24K 25°         | 120V | 13.5 | 90 | 1000 | 75   | —     | 25 | 2400K | 80 | 12 |
| LED14P38D24KSP   | 13.5W PAR38 - 24K 15°         | 120V | 13.5 | 90 | 1000 | 75   | —     | 15 | 2400K | 80 | 12 |
| LED14P38D27KFL   | 13.5W PAR38 - 27K 40°         | 120V | 13.5 | 90 | 1050 | 77.8 | 2858  | 40 | 2700K | 80 | 12 |
| LED14P38D27KNFL  | 13.5W PAR38 - 27K 25°         | 120V | 13.5 | 90 | 1050 | 77.8 | 5583  | 25 | 2700K | 80 | 12 |
| LED14P38D27KNFLB | 13.5W PAR38 - 27K 25° - BLACK | 120V | 13.5 | 90 | 1050 | 77.8 | 5583  | 25 | 2700K | 80 | 12 |
| LED14P38D27KSP   | 13.5W PAR38 - 27K 15°         | 120V | 13.5 | 90 | 1050 | 77.8 | 10949 | 15 | 2700K | 80 | 12 |
| LED14P38D27KSPB  | 13.5W PAR38 - 27K 15° - BLACK | 120V | 13.5 | 90 | 1050 | 77.8 | 10949 | 15 | 2700K | 80 | 12 |
| LED14P38D30KFL   | 13.5W PAR38 - 30K 40°         | 120V | 13.5 | 90 | 1050 | 77.8 | 2846  | 40 | 3000K | 80 | 12 |
| LED14P38D30KNFL  | 13.5W PAR38 - 30K 25°         | 120V | 13.5 | 90 | 1050 | 77.8 | 6721  | 25 | 3000K | 80 | 12 |
| LED14P38D30KSP   | 13.5W PAR38 - 30K 15°         | 120V | 13.5 | 90 | 1050 | 77.8 | 11845 | 15 | 3000K | 80 | 12 |
| LED14P38D30KWFL  | 13.5W PAR38 - 30K 60°         | 120V | 13.5 | 90 | 1050 | 77.8 | —     | 60 | 3000K | 80 | 12 |
| LED14P38D35KFL   | 13.5W PAR38 - 35K 40°         | 120V | 13.5 | 90 | 1050 | 77.8 | 2846  | 40 | 3500K | 80 | 12 |
| LED14P38D35KFLB  | 13.5W PAR38 - 35K 40° - BLACK | 120V | 13.5 | 90 | 1050 | 77.8 | 2846  | 40 | 3500K | 80 | 12 |
| LED14P38D35KNFL  | 13.5W PAR38 - 35K 25°         | 120V | 13.5 | 90 | 1050 | 77.8 | 6271  | 25 | 3500K | 80 | 12 |
| LED14P38D35KSP   | 13.5W PAR38 - 35K 15°         | 120V | 13.5 | 90 | 1050 | 77.8 | 10949 | 15 | 3500K | 80 | 12 |
| LED14P38D41KFL   | 13.5W PAR38 - 41K 40°         | 120V | 13.5 | 90 | 1050 | 77.8 | 2678  | 40 | 4100K | 80 | 12 |
| LED14P38D41KFLB  | 13.5W PAR38 - 41K 40° - BLACK | 120V | 13.5 | 90 | 1050 | 77.8 | 2678  | 40 | 4100K | 80 | 12 |
| LED14P38D41KNFL  | 13.5W PAR38 - 41K 25°         | 120V | 13.5 | 90 | 1050 | 77.8 | 8310  | 25 | 4100K | 80 | 12 |
| LED14P38D41KSP   | 13.5W PAR38 - 41K 15°         | 120V | 13.5 | 90 | 1050 | 77.8 | 13535 | 15 | 4100K | 80 | 12 |
| LED14P38D41KSPB  | 13.5W PAR38 - 41K 15° - BLACK | 120V | 13.5 | 90 | 1050 | 77.8 | 13535 | 15 | 4100K | 80 | 12 |
| LED14P38D50KFL   | 13.5W PAR38 - 50K 40°         | 120V | 13.5 | 90 | 1050 | 77.8 | 2647  | 40 | 5000K | 80 | 12 |
| LED14P38D50KFLB  | 13.5W PAR38 - 50K 40° - BLACK | 120V | 13.5 | 90 | 1050 | 77.8 | 2647  | 40 | 5000K | 80 | 12 |
| LED14P38D50KNFL  | 13.5W PAR38 - 50K 25°         | 120V | 13.5 | 90 | 1150 | 82.1 | 7611  | 25 | 5000K | 80 | 12 |
| LED14P38D50KSP   | 13.5W PAR38 - 50K 15°         | 120V | 13.5 | 90 | 1150 | 82.1 | 12147 | 15 | 5000K | 80 | 12 |

# LED PAR Lamps

| ITEM #                                                             | DESCRIPTION                   | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | CBCP  | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|--------------------------------------------------------------------|-------------------------------|---------|-------|-------------|--------|------|-------|------------|-------|-----|-----------|
| <b>13.5W Elite PAR30 – Dimmable • E26 Base • 25,000 Rated Life</b> |                               |         |       |             |        |      |       |            |       |     |           |
| LED14P30D24KFL                                                     | 13.5W PAR30 - 24K 40°         | 120V    | 13.5  | 75          | 1000   | 74.1 | —     | 40         | 2400K | 80  | 12        |
| LED14P30D24KNFL                                                    | 13.5W PAR30 - 24K 25°         | 120V    | 13.5  | 75          | 1000   | 74.1 | —     | 25         | 2400K | 80  | 12        |
| LED14P30D24KNFLB                                                   | 13.5W PAR30 - 24K 25° - BLACK | 120V    | 13.5  | 75          | 1000   | 74.1 | —     | 25         | 2400K | 80  | 12        |
| LED14P30D24KSP                                                     | 13.5W PAR30 - 24K 15°         | 120V    | 13.5  | 75          | 1000   | 74.1 | —     | 15         | 2400K | 80  | 12        |
| LED14P30D27KFL                                                     | 13.5W PAR30 - 27K 40°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 2693  | 40         | 2700K | 80  | 12        |
| LED14P30D27KFLB                                                    | 13.5W PAR30 - 27K 40° - BLACK | 120V    | 13.5  | 75          | 1050   | 77.8 | 2693  | 40         | 2700K | 80  | 12        |
| LED14P30D27KNFL                                                    | 13.5W PAR30 - 27K 25°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 5808  | 25         | 2700K | 80  | 12        |
| LED14P30D27KNFLB                                                   | 13.5W PAR30 - 27K 25° - BLACK | 120V    | 13.5  | 75          | 1050   | 77.8 | 5808  | 25         | 2700K | 80  | 12        |
| LED14P30D27KSP                                                     | 13.5W PAR30 - 27K 15°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 10563 | 15         | 2700K | 80  | 12        |
| LED14P30D27KSPB                                                    | 13.5W PAR30 - 27K 15° - BLACK | 120V    | 13.5  | 75          | 1050   | 77.8 | 10563 | 15         | 2700K | 80  | 12        |
| LED14P30D30KFL                                                     | 13.5W PAR30 - 30K 40°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 2849  | 40         | 3000K | 80  | 12        |
| LED14P30D30KFLB                                                    | 13.5W PAR30 - 30K 40° - BLACK | 120V    | 13.5  | 75          | 1050   | 77.8 | 2849  | 40         | 3000K | 80  | 12        |
| LED14P30D30KNFL                                                    | 13.5W PAR30 - 30K 25°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 6392  | 25         | 3000K | 80  | 12        |
| LED14P30D30KNFLB                                                   | 13.5W PAR30 - 30K 25° - BLACK | 120V    | 13.5  | 75          | 1050   | 77.8 | 6392  | 25         | 3000K | 80  | 12        |
| LED14P30D30KSP                                                     | 13.5W PAR30 - 30K 15°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 11181 | 15         | 3000K | 80  | 12        |
| LED14P30D30KSPB                                                    | 13.5W PAR30 - 30K 15° - BLACK | 120V    | 13.5  | 75          | 1050   | 77.8 | 11181 | 15         | 3000K | 80  | 12        |
| LED14P30D35KFL                                                     | 13.5W PAR30 - 35K 40°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 2849  | 40         | 3500K | 80  | 12        |
| LED14P30D35KFLB                                                    | 13.5W PAR30 - 35K 40° - BLACK | 120V    | 13.5  | 75          | 1050   | 77.8 | 2849  | 40         | 3500K | 80  | 12        |
| LED14P30D35KNFL                                                    | 13.5W PAR30 - 35K 25°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 6392  | 25         | 3500K | 80  | 12        |
| LED14P30D35KSP                                                     | 13.5W PAR30 - 35K 15°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 11181 | 15         | 3500K | 80  | 12        |
| LED14P30D41KFL                                                     | 13.5W PAR30 - 41K 40°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 2661  | 40         | 4100K | 80  | 12        |
| LED14P30D41KFLB                                                    | 13.5W PAR30 - 41K 40° - BLACK | 120V    | 13.5  | 75          | 1050   | 77.8 | 2661  | 40         | 4100K | 80  | 12        |
| LED14P30D41KNFL                                                    | 13.5W PAR30 - 41K 25°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 5781  | 25         | 4100K | 80  | 12        |
| LED14P30D41KNFLB                                                   | 13.5W PAR30 - 41K 25° - BLACK | 120V    | 13.5  | 75          | 1050   | 77.8 | 5781  | 25         | 4100K | 80  | 12        |
| LED14P30D41KSP                                                     | 13.5W PAR30 - 41K 15°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 12465 | 15         | 4100K | 80  | 12        |
| LED14P30D41KSPB                                                    | 13.5W PAR30 - 41K 15° - BLACK | 120V    | 13.5  | 75          | 1050   | 77.8 | 12465 | 15         | 4100K | 80  | 12        |
| LED14P30D50KFL                                                     | 13.5W PAR30 - 50K 40°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 2837  | 40         | 5000K | 80  | 12        |
| LED14P30D50KFLB                                                    | 13.5W PAR30 - 50K 40° - BLACK | 120V    | 13.5  | 75          | 1050   | 77.8 | 2837  | 40         | 5000K | 80  | 12        |
| LED14P30D50KNFL                                                    | 13.5W PAR30 - 50K 25°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 5875  | 25         | 5000K | 80  | 12        |
| LED14P30D50KSP                                                     | 13.5W PAR30 - 50K 15°         | 120V    | 13.5  | 75          | 1050   | 77.8 | 10043 | 15         | 5000K | 80  | 12        |



# LED PAR Lamps

| ITEM #                                                             | DESCRIPTION                   | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | CBCP | BEAM ANGLE | CCT   | CRI | CASE QTY. |  |
|--------------------------------------------------------------------|-------------------------------|---------|-------|-------------|--------|------|------|------------|-------|-----|-----------|--|
| <b>10.5W Elite PAR30 – Dimmable • E26 Base • 25,000 Rated Life</b> |                               |         |       |             |        |      |      |            |       |     |           |  |
| LED12P30D24KFL                                                     | 10.5W PAR30 - 24K 40°         | 120V    | 10.5  | 75          | 800    | 76.2 | —    | 40         | 2400K | 80  | 12        |  |
| LED12P30D24KNFL                                                    | 10.5W PAR30 - 24K 25°         | 120V    | 10.5  | 75          | 800    | 76.2 | —    | 25         | 2400K | 80  | 12        |  |
| LED12P30D24KSP                                                     | 10.5W PAR30 - 24K 15°         | 120V    | 10.5  | 75          | 800    | 76.2 | —    | 15         | 2400K | 80  | 12        |  |
| LED12P30D27KFL                                                     | 10.5W PAR30 - 27K 40°         | 120V    | 10.5  | 75          | 850    | 81   | 2202 | 40         | 2700K | 80  | 12        |  |
| LED12P30D27KFLB                                                    | 10.5W PAR30 - 27K 40° - BLACK | 120V    | 10.5  | 75          | 850    | 81   | 2202 | 40         | 2700K | 80  | 12        |  |
| LED12P30D27KNFL                                                    | 10.5W PAR30 - 27K 25°         | 120V    | 10.5  | 75          | 850    | 81   | 5031 | 25         | 2700K | 80  | 12        |  |
| LED12P30D27KNFLB                                                   | 10.5W PAR30 - 27K 25° - BLACK | 120V    | 10.5  | 75          | 850    | 81   | 5031 | 25         | 2700K | 80  | 12        |  |
| LED12P30D27KSP                                                     | 10.5W PAR30 - 27K 15°         | 120V    | 10.5  | 75          | 850    | 81   | 9193 | 15         | 2700K | 80  | 12        |  |
| LED12P30D27KSPB                                                    | 10.5W PAR30 - 27K 15° - BLACK | 120V    | 10.5  | 75          | 850    | 81   | 9193 | 15         | 2700K | 80  | 12        |  |
| LED12P30D30KFL                                                     | 12W PAR30 - 30K 40°           | 120V    | 10.5  | 75          | 850    | 81   | 2389 | 40         | 3000K | 80  | 12        |  |
| LED12P30D30KFLB                                                    | 12W PAR30 - 30K 40° - BLACK   | 120V    | 10.5  | 75          | 850    | 81   | 2389 | 40         | 3000K | 80  | 12        |  |
| LED12P30D30KNFL                                                    | 12W PAR30 - 30K 25°           | 120V    | 10.5  | 75          | 850    | 81   | 5528 | 25         | 3000K | 80  | 12        |  |
| LED12P30D30KNFLB                                                   | 12W PAR30 - 30K 25° - BLACK   | 120V    | 10.5  | 75          | 850    | 81   | 5528 | 25         | 3000K | 80  | 12        |  |
| LED12P30D30KSP                                                     | 12W PAR30 - 30K 15°           | 120V    | 10.5  | 75          | 850    | 81   | 9006 | 15         | 3000K | 80  | 12        |  |
| LED12P30D30KSPB                                                    | 12W PAR30 - 30K 15° - BLACK   | 120V    | 10.5  | 75          | 850    | 81   | 9006 | 15         | 3000K | 80  | 12        |  |
| LED12P30D35KFL                                                     | 12W PAR30 - 35K 40°           | 120V    | 10.5  | 75          | 850    | 81   | 2389 | 40         | 3500K | 80  | 12        |  |
| LED12P30D35KNFL                                                    | 12W PAR30 - 35K 25°           | 120V    | 10.5  | 75          | 850    | 81   | 5528 | 25         | 3500K | 80  | 12        |  |
| LED12P30D35KSP                                                     | 12W PAR30 - 35K 15°           | 120V    | 10.5  | 75          | 850    | 81   | 9006 | 15         | 3500K | 80  | 12        |  |
| LED12P30D41KFL                                                     | 12W PAR30 - 41K 40°           | 120V    | 10.5  | 75          | 850    | 81   | 2561 | 40         | 4100K | 80  | 12        |  |
| LED12P30D41KFLB                                                    | 12W PAR30 - 41K 40° - BLACK   | 120V    | 10.5  | 75          | 850    | 81   | 2561 | 40         | 4100K | 80  | 12        |  |
| LED12P30D41KNFL                                                    | 12W PAR30 - 41K 25°           | 120V    | 10.5  | 75          | 850    | 81   | 5781 | 25         | 4100K | 80  | 12        |  |
| LED12P30D41KNFLB                                                   | 12W PAR30 - 41K 25° - BLACK   | 120V    | 10.5  | 75          | 850    | 81   | 5781 | 25         | 4100K | 80  | 12        |  |
| LED12P30D41KSP                                                     | 12W PAR30 - 41K 15°           | 120V    | 10.5  | 75          | 850    | 81   | 9491 | 15         | 4100K | 80  | 12        |  |
| LED12P30D41KSPB                                                    | 12W PAR30 - 41K 15° - BLACK   | 120V    | 10.5  | 75          | 850    | 81   | 9491 | 15         | 4100K | 80  | 12        |  |
| LED12P30D50KFL                                                     | 12W PAR30 - 50K 40°           | 120V    | 10.5  | 75          | 850    | 81   | 2437 | 40         | 5000K | 80  | 12        |  |
| LED12P30D50KFLB                                                    | 12W PAR30 - 50K 40° - BLACK   | 120V    | 10.5  | 75          | 850    | 81   | 2437 | 40         | 5000K | 80  | 12        |  |
| LED12P30D50KNFL                                                    | 12W PAR30 - 50K 25°           | 120V    | 10.5  | 75          | 850    | 81   | 5575 | 25         | 5000K | 80  | 12        |  |
| LED12P30D50KSP                                                     | 12W PAR30 - 50K 15°           | 120V    | 10.5  | 75          | 850    | 81   | 9647 | 15         | 5000K | 80  | 12        |  |

| ITEM #                                                                      | DESCRIPTION                        | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | CBCP | BEAM ANGLE | CCT   | CRI | CASE QTY. |  |
|-----------------------------------------------------------------------------|------------------------------------|---------|-------|-------------|--------|-----|------|------------|-------|-----|-----------|--|
| <b>10W Elite PAR30 Short Neck – Dimmable • E26 Base • 25,000 Rated Life</b> |                                    |         |       |             |        |     |      |            |       |     |           |  |
| LED12P30SD24KFL                                                             | 10W PAR30 SHORT NECK - 24K 40°     | 120V    | 10    | 75          | 800    | 80  | 1619 | 40         | 2400K | 80  | 12        |  |
| LED12P30SD24KNFL                                                            | 10W PAR30 SHORT NECK - 24K 25°     | 120V    | 10    | 75          | 800    | 80  | —    | 25         | 2400K | 80  | 12        |  |
| LED12P30SD24KSP                                                             | 10W PAR30 SHORT NECK - 24K 15°     | 120V    | 10    | 75          | 800    | 80  | —    | 15         | 2400K | 80  | 12        |  |
| LED12P30SD27KFL                                                             | 10W PAR30 SHORT NECK - 27K 40°     | 120V    | 10    | 75          | 850    | 85  | 1817 | 40         | 2700K | 80  | 12        |  |
| LED12P30SD27KFLB                                                            | 10W PAR30 SHORT NECK - 27K 40° BLK | 120V    | 10    | 75          | 850    | 85  | 1817 | 40         | 2700K | 80  | 12        |  |
| LED12P30SD27KNFL                                                            | 10W PAR30 SHORT NECK - 27K 25°     | 120V    | 10    | 75          | 850    | 85  | 4025 | 25         | 2700K | 80  | 12        |  |
| LED12P30SD27KNFLB                                                           | 10W PAR30 SHORT NECK - 27K 25° BLK | 120V    | 10    | 75          | 850    | 85  | 4025 | 25         | 2700K | 80  | 12        |  |
| LED12P30SD27KSP                                                             | 10W PAR30 SHORT NECK - 27K 15°     | 120V    | 10    | 75          | 850    | 85  | 8042 | 15         | 2700K | 80  | 12        |  |



# LED PAR Lamps

| ITEM #                                                                                  | DESCRIPTION                        | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | CBCP | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|-----------------------------------------------------------------------------------------|------------------------------------|---------|-------|-------------|--------|-----|------|------------|-------|-----|-----------|
| <b>10W Elite PAR30 Short Neck – Dimmable • E26 Base • 25,000 Rated Life (continued)</b> |                                    |         |       |             |        |     |      |            |       |     |           |
| LED12P30SD30KFL                                                                         | 10W PAR30 SHORT NECK - 30K 40°     | 120V    | 10    | 75          | 850    | 85  | 1858 | 40         | 3000K | 80  | 12        |
| LED12P30SD30KFLB                                                                        | 10W PAR30 SHORT NECK - 30K 40° BLK | 120V    | 10    | 75          | 850    | 85  | 1858 | 40         | 3000K | 80  | 12        |
| LED12P30SD30KNFL                                                                        | 10W PAR30 SHORT NECK - 30K 25°     | 120V    | 10    | 75          | 850    | 85  | 4968 | 25         | 3000K | 80  | 12        |
| LED12P30SD30KNFLB                                                                       | 10W PAR30 SHORT NECK - 30K 25° BLK | 120V    | 10    | 75          | 850    | 85  | 4968 | 25         | 3000K | 80  | 12        |
| LED12P30SD30KSP                                                                         | 10W PAR30 SHORT NECK - 30K 15°     | 120V    | 10    | 75          | 850    | 85  | 8380 | 15         | 3000K | 80  | 12        |
| LED12P30SD30KSPB                                                                        | 10W PAR30 SHORT NECK - 30K 15° BLK | 120V    | 10    | 75          | 850    | 85  | 8380 | 15         | 3000K | 80  | 12        |
| LED12P30SD35KFL                                                                         | 10W PAR30 SHORT NECK - 35K 40°     | 120V    | 10    | 75          | 850    | 85  | 2232 | 40         | 3500K | 80  | 12        |
| LED12P30SD35KFLB                                                                        | 10W PAR30 SHORT NECK - 35K 40° BLK | 120V    | 10    | 75          | 850    | 85  | 2232 | 40         | 3500K | 80  | 12        |
| LED12P30SD35KNFL                                                                        | 10W PAR30 SHORT NECK - 35K 25°     | 120V    | 10    | 75          | 850    | 85  | 4402 | 25         | 3500K | 80  | 12        |
| LED12P30SD35KNFLB                                                                       | 10W PAR30 SHORT NECK - 35K 25° BLK | 120V    | 10    | 75          | 850    | 85  | 4402 | 25         | 3500K | 80  | 12        |
| LED12P30SD35KSP                                                                         | 10W PAR30 SHORT NECK - 35K 15°     | 120V    | 10    | 75          | 850    | 85  | 8380 | 15         | 3500K | 80  | 12        |
| LED12P30SD41KFL                                                                         | 10W PAR30 SHORT NECK - 41K 40°     | 120V    | 10    | 75          | 850    | 85  | 2247 | 40         | 4100K | 80  | 12        |
| LED12P30SD41KFLB                                                                        | 10W PAR30 SHORT NECK - 41K 40° BLK | 120V    | 10    | 75          | 850    | 85  | 2247 | 40         | 4100K | 80  | 12        |
| LED12P30SD41KNFL                                                                        | 10W PAR30 SHORT NECK - 41K 25°     | 120V    | 10    | 75          | 850    | 85  | 4895 | 25         | 4100K | 80  | 12        |
| LED12P30SD41KSP                                                                         | 10W PAR30 SHORT NECK - 41K 15°     | 120V    | 10    | 75          | 850    | 85  | 8710 | 15         | 4100K | 80  | 12        |
| LED12P30SD50KFL                                                                         | 10W PAR30 SHORT NECK - 50K 40°     | 120V    | 10    | 75          | 850    | 85  | 2454 | 40         | 5000K | 80  | 12        |
| LED12P30SD50KNFL                                                                        | 10W PAR30 SHORT NECK - 50K 25°     | 120V    | 10    | 75          | 850    | 85  | 5260 | 25         | 5000K | 80  | 12        |
| LED12P30SD50KSP                                                                         | 10W PAR30 SHORT NECK - 50K 15°     | 120V    | 10    | 75          | 850    | 85  | 9292 | 15         | 5000K | 80  | 12        |

|                                                                 |                            |      |   |    |     |      |      |    |       |    |    |
|-----------------------------------------------------------------|----------------------------|------|---|----|-----|------|------|----|-------|----|----|
| <b>7W Elite PAR20 – Dimmable • E26 Base • 25,000 Rated Life</b> |                            |      |   |    |     |      |      |    |       |    |    |
| L7P20D2524KFL                                                   | 7W PAR20 - 24K 40°         | 120V | 7 | 50 | 550 | 78.6 | 1058 | 40 | 2400K | 80 | 12 |
| L7P20D2524KNFL                                                  | 7W PAR20 - 24K 25°         | 120V | 7 | 50 | 550 | 78.6 | 1894 | 25 | 2400K | 80 | 12 |
| L7P20D2527KFL                                                   | 7W PAR20 - 27K 40°         | 120V | 7 | 50 | 600 | 85.7 | 1208 | 40 | 2700K | 80 | 12 |
| L7P20D2527KFLB                                                  | 7W PAR20 - 27K 40° - BLACK | 120V | 7 | 50 | 600 | 85.7 | 1208 | 40 | 2700K | 80 | 12 |
| L7P20D2527KNFL                                                  | 7W PAR20 - 27K 25°         | 120V | 7 | 50 | 600 | 85.7 | 2030 | 25 | 2700K | 80 | 12 |
| L7P20D2527KSP                                                   | 7W PAR20 - 27K 15°         | 120V | 7 | 50 | 600 | 85.7 | 4898 | 15 | 2700K | 80 | 12 |
| L7P20D2530KFL                                                   | 7W PAR20 - 30K 40°         | 120V | 7 | 50 | 625 | 89.3 | 1187 | 40 | 3000K | 80 | 12 |
| L7P20D2530KFLB                                                  | 7W PAR20 - 30K 40° - BLACK | 120V | 7 | 50 | 625 | 89.3 | 1187 | 40 | 3000K | 80 | 12 |
| L7P20D2530KNFL                                                  | 7W PAR20 - 30K 25°         | 120V | 7 | 50 | 625 | 89.3 | 2050 | 25 | 3000K | 80 | 12 |
| L7P20D2530KNFLB                                                 | 7W PAR20 - 30K 25° - BLACK | 120V | 7 | 50 | 625 | 89.3 | 2050 | 25 | 3000K | 80 | 12 |
| L7P20D2530KSP                                                   | 7W PAR20 - 30K 15°         | 120V | 7 | 50 | 625 | 89.3 | 5391 | 15 | 3000K | 80 | 12 |
| L7P20D2535KFL                                                   | 7W PAR20 - 35K 40°         | 120V | 7 | 50 | 675 | 96.4 | 1187 | 40 | 3500K | 80 | 12 |
| L7P20D2535KNFL                                                  | 7W PAR20 - 35K 25°         | 120V | 7 | 50 | 675 | 96.4 | 2050 | 25 | 3500K | 80 | 12 |
| L7P20D2541KFL                                                   | 7W PAR20 - 41K 40°         | 120V | 7 | 50 | 675 | 96.4 | 1383 | 40 | 4100K | 80 | 12 |
| L7P20D2541KFLB                                                  | 7W PAR20 - 41K 40° - BLACK | 120V | 7 | 50 | 675 | 96.4 | 1383 | 40 | 4100K | 80 | 12 |
| L7P20D2541KNFL                                                  | 7W PAR20 - 41K 25°         | 120V | 7 | 50 | 675 | 96.4 | 2174 | 25 | 4100K | 80 | 12 |
| L7P20D2541KNFLB                                                 | 7W PAR20 - 41K 25° - BLACK | 120V | 7 | 50 | 675 | 96.4 | 2174 | 25 | 4100K | 80 | 12 |
| L7P20D2541KSP                                                   | 7W PAR20 - 41K 15°         | 120V | 7 | 50 | 675 | 96.4 | 5411 | 15 | 4100K | 80 | 12 |
| L7P20D2550KFL                                                   | 7W PAR20 - 50K 40°         | 120V | 7 | 50 | 700 | 100  | 1330 | 40 | 5000K | 80 | 12 |
| L7P20D2550KFLB                                                  | 7W PAR20 - 50K 40° - BLACK | 120V | 7 | 50 | 700 | 100  | 1330 | 40 | 5000K | 80 | 12 |
| L7P20D2550KNFL                                                  | 7W PAR20 - 50K 25°         | 120V | 7 | 50 | 700 | 100  | 2172 | 25 | 5000K | 80 | 12 |
| L7P20D2550KSP                                                   | 7W PAR20 - 50K 15°         | 120V | 7 | 50 | 700 | 100  | 5599 | 15 | 5000K | 80 | 12 |

For the most up-to-date specs and warranty information, please visit [www.tcpi.com](http://www.tcpi.com)

Black housing options are often available. Add "B" to the end of the item number.



**RoHS**  
COMPLIANT

**5 YEAR**  
WARRANTY  
\*Based on 12 hours use per day

**113**

# LED PAR Lamps

## 15W PAR38 – Dimmable • E26 Base • 25,000 Rated Life



| ITEM #           | DESCRIPTION         | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW   | CBCP | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|------------------|---------------------|---------|-------|-------------|--------|-------|------|------------|-------|-----|-----------|
| L150P38D2527KFL  | 15W PAR38 - 27K 40° | 120V    | 15    | 150         | 1450   | 96.7  | 3403 | 40         | 2700K | 80  | 12        |
| L150P38D2527KNFL | 15W PAR38 - 27K 25° | 120V    | 15    | 150         | 1450   | 96.7  | 7563 | 25         | 2700K | 80  | 12        |
| L150P38D2530KFL  | 15W PAR38 - 30K 40° | 120V    | 15    | 150         | 1500   | 100   | 3470 | 40         | 3000K | 80  | 12        |
| L150P38D2530KNFL | 15W PAR38 - 30K 25° | 120V    | 15    | 150         | 1500   | 100   | 7624 | 25         | 3000K | 80  | 12        |
| L150P38D2540KFL  | 15W PAR38 - 40K 40° | 120V    | 15    | 150         | 1550   | 103.3 | 3554 | 40         | 4000K | 80  | 12        |
| L150P38D2540KNFL | 15W PAR38 - 40K 25° | 120V    | 15    | 150         | 1550   | 103.3 | 7800 | 25         | 4000K | 80  | 12        |
| L150P38D2550KFL  | 15W PAR38 - 50K 40° | 120V    | 15    | 150         | 1600   | 106.7 | 3880 | 40         | 5000K | 80  | 12        |
| L150P38D2550KNFL | 15W PAR38 - 50K 25° | 120V    | 15    | 150         | 1600   | 106.7 | 8028 | 25         | 5000K | 80  | 12        |

## 13W PAR38 – Dimmable • E26 Base • 25,000 Rated Life



| ITEM #           | DESCRIPTION             | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW   | CBCP | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|------------------|-------------------------|---------|-------|-------------|--------|-------|------|------------|-------|-----|-----------|
| L120P38D2527KFL  | 13W PAR38 - 27K 40°     | 120V    | 13    | 120         | 1100   | 84.6  | 2584 | 40         | 2700K | 80  | 12        |
| L120P38D2527KNFL | 13W PAR38 - 27K 25°     | 120V    | 13    | 120         | 1100   | 84.6  | 6235 | 25         | 2700K | 80  | 12        |
| L120P38D2527KWFL | LED 13W P38 DIM 27K WFL | 120V    | 13    | 120         | 1200   | 92.3  | 1171 | 60         | 2700K | 80  | 12        |
| L120P38D2530KFL  | 13W PAR38 - 30K 40°     | 120V    | 13    | 120         | 1200   | 92.3  | 2508 | 40         | 3000K | 80  | 12        |
| L120P38D2530KNFL | 13W PAR38 - 30K 25°     | 120V    | 13    | 120         | 1200   | 92.3  | 6661 | 25         | 3000K | 80  | 12        |
| L120P38D2530KWFL | LED 13W P38 DIM 30K WFL | 120V    | 13    | 120         | 1300   | 100.0 | 1181 | 60         | 3000K | 80  | 12        |
| L120P38D2540KFL  | 13W PAR38 - 40K 40°     | 120V    | 13    | 120         | 1250   | 96.2  | 2348 | 40         | 4000K | 80  | 12        |
| L120P38D2540KNFL | 13W PAR38 - 40K 25°     | 120V    | 13    | 120         | 1250   | 96.2  | 6482 | 25         | 4000K | 80  | 12        |
| L120P38D2540KWFL | LED 13W P38 DIM 40K WFL | 120V    | 13    | 120         | 1300   | 100.0 | 1208 | 60         | 4000K | 80  | 12        |
| L120P38D2550KFL  | 13W PAR38 - 50K 40°     | 120V    | 13    | 120         | 1250   | 96.2  | 2562 | 40         | 5000K | 80  | 12        |
| L120P38D2550KNFL | 13W PAR38 - 50K 25°     | 120V    | 13    | 120         | 1250   | 96.2  | 6513 | 25         | 5000K | 80  | 12        |
| L120P38D2550KWFL | LED 13W P38 DIM 50K WFL | 120V    | 13    | 120         | 1300   | 100.0 | 1203 | 60         | 5000K | 80  | 12        |

## 10W PAR38 – Dimmable • E26 Base • 25,000 Rated Life



| ITEM #          | DESCRIPTION           | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | CBCP | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|-----------------|-----------------------|---------|-------|-------------|--------|-----|------|------------|-------|-----|-----------|
| L90P38D2527KFL  | 10W PAR38 - 2700K 40° | 120V    | 10    | 90          | 900    | 90  | 1872 | 40         | 2700K | 80  | 12        |
| L90P38D2527KNFL | 10W PAR38 - 2700K 25° | 120V    | 10    | 90          | 900    | 90  | 4199 | 25         | 2700K | 80  | 12        |
| L90P38D2530KFL  | 10W PAR38 - 3000K 40° | 120V    | 10    | 90          | 900    | 90  | 1964 | 40         | 3000K | 80  | 12        |
| L90P38D2530KNFL | 10W PAR38 - 3000K 25° | 120V    | 10    | 90          | 900    | 90  | 4384 | 25         | 3000K | 80  | 12        |
| L90P38D2540KFL  | 10W PAR38 - 4000K 40° | 120V    | 10    | 90          | 950    | 95  | 2017 | 40         | 4000K | 80  | 12        |
| L90P38D2540KNFL | 10W PAR38 - 4000K 25° | 120V    | 10    | 90          | 950    | 95  | 4413 | 25         | 4000K | 80  | 12        |
| L90P38D2550KFL  | 10W PAR38 - 5000K 40° | 120V    | 10    | 90          | 950    | 95  | 2222 | 40         | 5000K | 80  | 12        |
| L90P38D2550KNFL | 10W PAR38 - 5000K 25° | 120V    | 10    | 90          | 950    | 95  | 4383 | 25         | 5000K | 80  | 12        |



# LED PAR Lamps

## 9W PAR30 – Dimmable • E26 Base • 25,000 Rated Life



| ITEM #          | DESCRIPTION        | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | CBCP | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|-----------------|--------------------|---------|-------|-------------|--------|------|------|------------|-------|-----|-----------|
| L75P30D2527KFL  | 9W PAR30 - 27K 40° | 120V    | 9     | 75          | 700    | 77.8 | 1640 | 40         | 2700K | 80  | 12        |
| L75P30D2527KNFL | 9W PAR30 - 27K 25° | 120V    | 9     | 75          | 700    | 77.8 | 3419 | 25         | 2700K | 80  | 12        |
| L75P30D2530KFL  | 9W PAR30 - 30K 40° | 120V    | 9     | 75          | 720    | 80   | 1658 | 40         | 3000K | 80  | 12        |
| L75P30D2530KNFL | 9W PAR30 - 30K 25° | 120V    | 9     | 75          | 720    | 80   | 3392 | 25         | 3000K | 80  | 12        |
| L75P30D2540KFL  | 9W PAR30 - 40K 40° | 120V    | 9     | 75          | 770    | 85.6 | 1759 | 40         | 4000K | 80  | 12        |
| L75P30D2540KNFL | 9W PAR30 - 40K 25° | 120V    | 9     | 75          | 770    | 85.6 | 3701 | 25         | 4000K | 80  | 12        |
| L75P30D2550KFL  | 9W PAR30 - 50K 40° | 120V    | 9     | 75          | 770    | 85.6 | 1790 | 40         | 5000K | 80  | 12        |
| L75P30D2550KNFL | 9W PAR30 - 50K 25° | 120V    | 9     | 75          | 770    | 85.6 | 3874 | 25         | 5000K | 80  | 12        |

## 9W PAR30 Short Neck – Dimmable • E26 Base • 25,000 Rated Life



|                  |                               |      |   |    |     |      |      |    |       |    |    |
|------------------|-------------------------------|------|---|----|-----|------|------|----|-------|----|----|
| L75P30SD2527KFL  | 9W PAR30 SHORT NECK - 27K 40° | 120V | 9 | 75 | 750 | 83.3 | 1714 | 40 | 2700K | 80 | 12 |
| L75P30SD2527KNFL | 9W PAR30 SHORT NECK - 27K 25° | 120V | 9 | 75 | 750 | 83.3 | 3051 | 25 | 2700K | 80 | 12 |
| L75P30SD2530KFL  | 9W PAR30 SHORT NECK - 30K 40° | 120V | 9 | 75 | 750 | 83.3 | 1621 | 40 | 3000K | 80 | 12 |
| L75P30SD2530KNFL | 9W PAR30 SHORT NECK - 30K 25° | 120V | 9 | 75 | 750 | 83.3 | 3064 | 25 | 3000K | 80 | 12 |
| L75P30SD2540KFL  | 9W PAR30 SHORT NECK - 40K 40° | 120V | 9 | 75 | 800 | 88.9 | 1714 | 40 | 4000K | 80 | 12 |
| L75P30SD2540KNFL | 9W PAR30 SHORT NECK - 40K 25° | 120V | 9 | 75 | 800 | 88.9 | 2930 | 25 | 4000K | 80 | 12 |
| L75P30SD2550KFL  | 9W PAR30 SHORT NECK - 50K 40° | 120V | 9 | 75 | 800 | 88.9 | 1847 | 40 | 5000K | 80 | 12 |
| L75P30SD2550KNFL | 9W PAR30 SHORT NECK - 50K 25° | 120V | 9 | 75 | 800 | 88.9 | 3274 | 25 | 5000K | 80 | 12 |

## 7W PAR20 – Dimmable • E26 Base • 25,000 Rated Life



|                 |                    |      |   |    |     |      |      |    |       |    |    |
|-----------------|--------------------|------|---|----|-----|------|------|----|-------|----|----|
| L50P20D2527KFL  | 7W PAR20 - 27K 40° | 120V | 7 | 50 | 525 | 75   | 1208 | 40 | 2700K | 80 | 12 |
| L50P20D2527KNFL | 7W PAR20 - 27K 25° | 120V | 7 | 50 | 525 | 75   | 2030 | 25 | 2700K | 80 | 12 |
| L50P20D2530KFL  | 7W PAR20 - 30K 40° | 120V | 7 | 50 | 525 | 75   | 1187 | 40 | 3000K | 80 | 12 |
| L50P20D2530KNFL | 7W PAR20 - 30K 25° | 120V | 7 | 50 | 525 | 75   | 2050 | 25 | 3000K | 80 | 12 |
| L50P20D2540KFL  | 7W PAR20 - 40K 40° | 120V | 7 | 50 | 575 | 82.1 | 1383 | 40 | 4000K | 80 | 12 |
| L50P20D2540KNFL | 7W PAR20 - 40K 25° | 120V | 7 | 50 | 575 | 82.1 | 2174 | 25 | 4000K | 80 | 12 |
| L50P20D2550KFL  | 7W PAR20 - 50K 40° | 120V | 7 | 50 | 575 | 82.1 | 1330 | 40 | 5000K | 80 | 12 |
| L50P20D2550KNFL | 7W PAR20 - 50K 25° | 120V | 7 | 50 | 575 | 82.1 | 2172 | 25 | 5000K | 80 | 12 |

# LED PAR Lamps

| ITEM #                                                                                                    | DESCRIPTION                          | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | CBCP  | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|-----------------------------------------------------------------------------------------------------------|--------------------------------------|---------|-------|-------------|--------|------|-------|------------|-------|-----|-----------|
| <b>18.5W Designer Dimmable Elite High Output High CRI PAR38 – Dimmable • E26 Base • 25,000 Rated Life</b> |                                      |         |       |             |        |      |       |            |       |     |           |
| LED17HOP38D27KFL95                                                                                        | 18.5W HIGH OUTPUT HIGH CRI - 27K 40° | 120V    | 18.5  | 150         | 1300   | 70.3 | 2231  | 40         | 2700K | 90  | 12        |
| LED17HOP38D27KNFL95                                                                                       | 18.5W HIGH OUTPUT HIGH CRI - 27K 25° | 120V    | 18.5  | 150         | 1300   | 70.3 | 5382  | 25         | 2700K | 90  | 12        |
| LED17HOP38D27KSP95                                                                                        | 18.5W HIGH OUTPUT HIGH CRI - 27K 15° | 120V    | 18.5  | 150         | 1300   | 70.3 | 12059 | 15         | 2700K | 90  | 12        |
| LED17HOP38D30KFL95                                                                                        | 18.5W HIGH OUTPUT HIGH CRI - 30K 40° | 120V    | 18.5  | 150         | 1300   | 70.3 | 2231  | 40         | 3000K | 90  | 12        |
| LED17HOP38D30KNFL95                                                                                       | 18.5W HIGH OUTPUT HIGH CRI - 30K 25° | 120V    | 18.5  | 150         | 1300   | 70.3 | 5382  | 25         | 3000K | 90  | 12        |
| LED17HOP38D30KSP95                                                                                        | 18.5W HIGH OUTPUT HIGH CRI - 30K 15° | 120V    | 18.5  | 150         | 1300   | 70.3 | 12059 | 15         | 3000K | 90  | 12        |



|                                                                                                      |                            |      |    |    |      |    |      |    |       |    |    |
|------------------------------------------------------------------------------------------------------|----------------------------|------|----|----|------|----|------|----|-------|----|----|
| <b>15W Designer Dimmable Elite High CRI R9&gt;50 PAR38 – Dimmable • E26 Base • 25,000 Rated Life</b> |                            |      |    |    |      |    |      |    |       |    |    |
| LED17P38D27KFL95                                                                                     | 15W HIGH CRI P38 - 27K 40° | 120V | 15 | 90 | 1050 | 70 | 1533 | 40 | 2700K | 90 | 12 |
| LED17P38D27KNFL95                                                                                    | 15W HIGH CRI P38 - 27K 25° | 120V | 15 | 90 | 1050 | 70 | 3698 | 25 | 2700K | 90 | 12 |
| LED17P38D27KSP95                                                                                     | 15W HIGH CRI P38 - 27K 15° | 120V | 15 | 90 | 1050 | 70 | 8285 | 15 | 2700K | 90 | 12 |
| LED17P38D30KFL95                                                                                     | 15W HIGH CRI P38 - 30K 40° | 120V | 15 | 90 | 1050 | 70 | 1533 | 40 | 3000K | 90 | 12 |
| LED17P38D30KNFL95                                                                                    | 15W HIGH CRI P38 - 30K 25° | 120V | 15 | 90 | 1050 | 70 | 3698 | 25 | 3000K | 90 | 12 |

|                                                                                               |                              |      |      |    |      |      |      |    |       |    |    |
|-----------------------------------------------------------------------------------------------|------------------------------|------|------|----|------|------|------|----|-------|----|----|
| <b>13.5W Designer Dimmable Elite High CRI PAR38 – Dimmable • E26 Base • 25,000 Rated Life</b> |                              |      |      |    |      |      |      |    |       |    |    |
| LED14P38D27KNFL95                                                                             | 13.5W HIGH CRI P38 - 27K 25° | 120V | 13.5 | 75 | 1000 | 74.1 | 3698 | 25 | 2700K | 90 | 12 |

|                                                                                               |                              |      |      |    |      |      |      |    |       |    |    |
|-----------------------------------------------------------------------------------------------|------------------------------|------|------|----|------|------|------|----|-------|----|----|
| <b>13.5W Designer Dimmable Elite High CRI PAR30 – Dimmable • E26 Base • 25,000 Rated Life</b> |                              |      |      |    |      |      |      |    |       |    |    |
| LED14P30D27KNFL95                                                                             | 13.5W HIGH CRI P30 - 27K 25° | 120V | 13.5 | 75 | 1000 | 74.1 | 2910 | 25 | 2700K | 90 | 12 |
| LED14P30D30KNFL95                                                                             | 13.5W HIGH CRI P30 - 30K 25° | 120V | 13.5 | 75 | 1000 | 74.1 | 2910 | 25 | 3000K | 90 | 12 |



|                                                                                               |                              |      |      |    |     |      |      |    |       |    |    |
|-----------------------------------------------------------------------------------------------|------------------------------|------|------|----|-----|------|------|----|-------|----|----|
| <b>10.5W Designer Dimmable Elite High CRI PAR30 – Dimmable • E26 Base • 25,000 Rated Life</b> |                              |      |      |    |     |      |      |    |       |    |    |
| LED12P30D30KNFL95                                                                             | 10.5W HIGH CRI P30 - 30K 25° | 120V | 10.5 | 65 | 750 | 71.4 | 2118 | 25 | 3000K | 90 | 12 |

|                                                                                                       |                                       |      |    |    |     |    |      |    |       |    |    |
|-------------------------------------------------------------------------------------------------------|---------------------------------------|------|----|----|-----|----|------|----|-------|----|----|
| <b>10W Designer Dimmable Elite High CRI PAR30 Short Neck– Dimmable • E26 Base • 25,000 Rated Life</b> |                                       |      |    |    |     |    |      |    |       |    |    |
| LED12P30SD27KFL95                                                                                     | 10W HIGH CRI P30 SHORT NECK - 27K 40° | 120V | 10 | 65 | 750 | 75 | 957  | 40 | 2700K | 90 | 12 |
| LED12P30SD27KNFL95                                                                                    | 10W HIGH CRI P30 SHORT NECK - 27K 25° | 120V | 10 | 65 | 750 | 75 | 2118 | 25 | 2700K | 90 | 12 |
| LED12P30SD30KFL95                                                                                     | 10W HIGH CRI P30 SHORT NECK - 30K 40° | 120V | 10 | 65 | 750 | 75 | 957  | 40 | 3000K | 90 | 12 |
| LED12P30SD30KNFL95                                                                                    | 10W HIGH CRI P30 SHORT NECK - 30K 25° | 120V | 10 | 65 | 750 | 75 | 2118 | 25 | 3000K | 90 | 12 |
| LED12P30SD30KSP95                                                                                     | 10W HIGH CRI P30 SHORT NECK - 30K 15° | 120V | 10 | 65 | 750 | 75 | 4481 | 15 | 3000K | 90 | 12 |



# LED BR Lamps

TCP's LED BR Lamps combine the long life and energy savings of LED technology with the look and feel of a traditional halogen lamp.

## Features & Benefits

- Up to 80% more efficient than incandescent replacements, providing instant energy savings
- UL approved for damp locations – can be used outdoors when protected from elements and withstand humidity indoors/outdoors
- Durable plastic housing lowers the risk of injury and breakage

## Specifications

|                          |                                             |
|--------------------------|---------------------------------------------|
| Color Temperatures ..... | 2400K, 2700K, 3000K,<br>3500K, 4100K, 5000K |
| Input Line Voltage.....  | 120 VAC                                     |
| Frequency .....          | 50/60HZ                                     |
| CRI.....                 | 80                                          |
| Base.....                | E26                                         |

| ITEM # | DESCRIPTION | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | BEAM ANGLE | CCT | CRI | CASE QTY. |
|--------|-------------|---------|-------|-------------|--------|-----|------------|-----|-----|-----------|
|--------|-------------|---------|-------|-------------|--------|-----|------------|-----|-----|-----------|



| 15W Elite BR30 – Dimmable • E26 Base • 25,000 Rated Life |                    |      |    |    |      |       |     |       |    |    |  |
|----------------------------------------------------------|--------------------|------|----|----|------|-------|-----|-------|----|----|--|
| LED17BR40D24K                                            | 15W DIM BR40 - 24K | 120V | 15 | 90 | 1250 | 83.3  | 110 | 2400K | 80 | 12 |  |
| LED17BR40D27K                                            | 15W DIM BR40 - 27K | 120V | 15 | 90 | 1500 | 100   | 110 | 2700K | 80 | 12 |  |
| LED17BR40D30K                                            | 15W DIM BR40 - 30K | 120V | 15 | 90 | 1600 | 106.7 | 110 | 3000K | 80 | 12 |  |
| LED17BR40D41K                                            | 15W DIM BR40 - 41K | 120V | 15 | 90 | 1700 | 113.3 | 110 | 4100K | 80 | 12 |  |
| LED17BR40D50K                                            | 15W DIM BR40 - 50K | 120V | 15 | 90 | 1700 | 113.3 | 110 | 5000K | 80 | 12 |  |

| 13W Elite BR30 – Dimmable • E26 Base • 25,000 Rated Life |  |  |  |  |  |  |  |  |  |  |  |
|----------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
|----------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|



|               |                    |      |    |    |      |      |     |       |    |    |
|---------------|--------------------|------|----|----|------|------|-----|-------|----|----|
| L85BR40D2524K | 13W DIM BR40 - 24K | 120V | 13 | 75 | 1050 | 80.8 | 110 | 2400K | 80 | 12 |
| L85BR40D2527K | 13W DIM BR40 - 27K | 120V | 13 | 75 | 1100 | 84.6 | 110 | 2700K | 80 | 12 |
| L85BR40D2530K | 13W DIM BR40 - 30K | 120V | 13 | 75 | 1150 | 88.5 | 110 | 3000K | 80 | 12 |
| L85BR40D2541K | 13W DIM BR40 - 41K | 120V | 13 | 75 | 1200 | 92.3 | 110 | 4100K | 80 | 12 |
| L85BR40D2550K | 13W DIM BR40 - 50K | 120V | 13 | 75 | 1200 | 92.3 | 110 | 5000K | 80 | 12 |

| 9.5W Elite BR30 – Dimmable • E26 Base • 25,000 Rated Life |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
|-----------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|



|               |                      |      |     |    |     |      |     |       |    |    |
|---------------|----------------------|------|-----|----|-----|------|-----|-------|----|----|
| LED12BR30D24K | 10.5W DIM BR30 - 24K | 120V | 9.5 | 65 | 700 | 73.7 | 110 | 2400K | 80 | 12 |
| LED12BR30D27K | 10.5W DIM BR30 - 27K | 120V | 9.5 | 65 | 850 | 89.5 | 110 | 2700K | 80 | 12 |
| LED12BR30D30K | 10.5W DIM BR30 - 30K | 120V | 9.5 | 65 | 850 | 89.5 | 110 | 3000K | 80 | 12 |
| LED12BR30D41K | 10.5W DIM BR30 - 41K | 120V | 9.5 | 65 | 900 | 94.7 | 110 | 4100K | 80 | 12 |
| LED12BR30D50K | 10.5W DIM BR30 - 50K | 120V | 9.5 | 65 | 900 | 94.7 | 110 | 5000K | 80 | 12 |

# LED BR Lamps

## 9.5W Elite BR30 – Dimmable • E26 Base • 25,000 Rated Life



| ITEM #       | DESCRIPTION         | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|--------------|---------------------|---------|-------|-------------|--------|------|------------|-------|-----|-----------|
| LED9BR30D24K | 9.5W DIM BR30 - 24K | 120V    | 9.5   | 65          | 600    | 63.2 | 110        | 2400K | 80  | 12        |
| LED9BR30D27K | 9.5W DIM BR30 - 27K | 120V    | 9.5   | 65          | 700    | 73.7 | 110        | 2700K | 80  | 12        |
| LED9BR30D30K | 9.5W DIM BR30 - 30K | 120V    | 9.5   | 65          | 700    | 73.7 | 110        | 3000K | 80  | 12        |
| LED9BR30D41K | 9.5W DIM BR30 - 41K | 120V    | 9.5   | 65          | 750    | 78.9 | 110        | 4100K | 80  | 12        |
| LED9BR30D50K | 9.5W DIM BR30 - 50K | 120V    | 9.5   | 65          | 750    | 78.9 | 110        | 5000K | 80  | 12        |

## 9W Elite BR30 – Dimmable • E26 Base • 25,000 Rated Life



|              |                  |      |   |    |     |      |     |       |    |    |
|--------------|------------------|------|---|----|-----|------|-----|-------|----|----|
| LED10R20D24K | 9W DIM R20 - 24K | 120V | 9 | 60 | 520 | 57.8 | 110 | 2400K | 80 | 12 |
| LED10R20D27K | 9W DIM R20 - 27K | 120V | 9 | 60 | 660 | 73.3 | 110 | 2700K | 80 | 12 |
| LED10R20D30K | 9W DIM R20 - 30K | 120V | 9 | 60 | 660 | 73.3 | 110 | 3000K | 80 | 12 |
| LED10R20D41K | 9W DIM R20 - 41K | 120V | 9 | 60 | 725 | 80.6 | 110 | 4100K | 80 | 12 |
| LED10R20D50K | 9W DIM R20 - 50K | 120V | 9 | 60 | 725 | 80.6 | 110 | 5000K | 80 | 12 |

## 7.5W Elite BR30 – Dimmable • E26 Base • 25,000 Rated Life



|             |                    |      |     |    |     |      |     |       |    |    |
|-------------|--------------------|------|-----|----|-----|------|-----|-------|----|----|
| L7R20D2524K | 7.5W DIM R20 - 24K | 120V | 7.5 | 50 | 400 | 53.3 | 110 | 2400K | 80 | 12 |
| L7R20D2527K | 7.5W DIM R20 - 27K | 120V | 7.5 | 50 | 525 | 70   | 110 | 2700K | 80 | 12 |
| L7R20D2530K | 7.5W DIM R20 - 30K | 120V | 7.5 | 50 | 525 | 70   | 110 | 3000K | 80 | 12 |
| L7R20D2541K | 7.5W DIM R20 - 41K | 120V | 7.5 | 50 | 525 | 70   | 110 | 4100K | 80 | 12 |
| L7R20D2550K | 7.5W DIM R20 - 50K | 120V | 7.5 | 50 | 525 | 70   | 110 | 5000K | 80 | 12 |

## 9W Elite BR30 – Dimmable • E26 Base • 15,000 Rated Life



|               |                          |      |   |    |     |      |     |       |    |    |
|---------------|--------------------------|------|---|----|-----|------|-----|-------|----|----|
| L8BR30D1527K2 | 9W DIM BR30 - 27K 2 PACK | 120V | 9 | 65 | 650 | 72.2 | 110 | 2700K | 80 | 12 |
| L8BR30D1530K2 | 9W DIM BR30 - 30K 2 PACK | 120V | 9 | 65 | 650 | 72.2 | 110 | 3000K | 80 | 12 |
| L8BR30D1541K2 | 9W DIM BR30 - 41K 2 PACK | 120V | 9 | 65 | 650 | 72.2 | 110 | 4100K | 80 | 12 |
| L8BR30D1550K2 | 9W DIM BR30 - 50K 2 PACK | 120V | 9 | 65 | 650 | 72.2 | 110 | 5000K | 80 | 12 |

TCP's LED A-Lamps provide the lighting you need at a cost you will love. Advanced factory techniques and rigorous testing ensure each lamp is perfect from day one.

## Features & Benefits

- Up to 85% more efficient than incandescent/halogen replacements, providing instant energy savings
- UL approved for damp locations, can be used in covered indoor and outdoor fixtures
- Long life minimizes replacement and maintenance costs

## Specifications

|                          |                                             |
|--------------------------|---------------------------------------------|
| Color Temperatures ..... | 2400K, 2700K, 3000K,<br>3500K, 4100K, 5000K |
| Input Line Voltage.....  | 120 VAC                                     |
| Frequency .....          | 50/60HZ                                     |
| CRI.....                 | 95                                          |
| Base.....                | E26                                         |

### 15W Elite A19 – Dimmable • E26 Base • 25,000 Rated Life



| ITEM #       | DESCRIPTION            | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW   | CCT   | CRI | CASE QTY. |
|--------------|------------------------|---------|-------|-------------|--------|-------|-------|-----|-----------|
| L15A19D2527K | DIMMABLE 15W A19 - 27K | 120V    | 15    | 100         | 1600   | 106.7 | 2700K | 80  | 12        |
| L15A19D2530K | DIMMABLE 15W A19 - 30K | 120V    | 15    | 100         | 1600   | 106.7 | 3000K | 80  | 12        |
| L15A19D2541K | DIMMABLE 15W A19 - 41K | 120V    | 15    | 100         | 1600   | 106.7 | 4100K | 80  | 12        |
| L15A19D2550K | DIMMABLE 15W A19 - 50K | 120V    | 15    | 100         | 1600   | 106.7 | 5000K | 80  | 12        |

### 15W A19 – Non-Dimmable • E26 Base • 15,000 Rated Life



|              |                            |      |    |     |      |       |       |    |    |
|--------------|----------------------------|------|----|-----|------|-------|-------|----|----|
| L16A19N1527K | NON-DIMMABLE 15W A19 - 27K | 120V | 15 | 100 | 1600 | 106.7 | 2700K | 80 | 12 |
| L16A19N1530K | NON-DIMMABLE 15W A19 - 30K | 120V | 15 | 100 | 1650 | 110   | 3000K | 80 | 12 |
| L16A19N1541K | NON-DIMMABLE 15W A19 - 41K | 120V | 15 | 100 | 1700 | 113.3 | 4100K | 80 | 12 |
| L16A19N1550K | NON-DIMMABLE 15W A19 - 50K | 120V | 15 | 100 | 1750 | 116.7 | 5000K | 80 | 12 |

### A19 4 Packs – Non-Dimmable • E26 Base • 10,000 Rated Life



|               |                                   |      |    |     |      |       |       |    |    |
|---------------|-----------------------------------|------|----|-----|------|-------|-------|----|----|
| L16A19N1027K4 | NON-DIMMABLE 16W A19 - 27K 4 PACK | 120V | 16 | 100 | 1500 | 93.8  | 2700K | 80 | 12 |
| L16A19N1041K4 | NON-DIMMABLE 14W A19 - 41K 4 PACK | 120V | 14 | 100 | 1500 | 107.1 | 4100K | 80 | 12 |

### 11.5W A19 – Dimmable • E26 Base • 25,000 Rated Life



|              |                          |      |      |    |      |      |       |    |    |
|--------------|--------------------------|------|------|----|------|------|-------|----|----|
| L75A19D2527K | DIMMABLE 11.5W A19 - 27K | 120V | 11.5 | 75 | 1100 | 95.7 | 2700K | 80 | 12 |
| L75A19D2530K | DIMMABLE 11.5W A19 - 30K | 120V | 11.5 | 75 | 1100 | 95.7 | 3000K | 80 | 12 |
| L75A19D2541K | DIMMABLE 11.5W A19 - 41K | 120V | 11.5 | 75 | 1100 | 95.7 | 4100K | 80 | 12 |
| L75A19D2550K | DIMMABLE 11.5W A19 - 50K | 120V | 11.5 | 75 | 1100 | 95.7 | 5000K | 80 | 12 |

# LED A Lamps

## 11W A19 – Non-Dimmable • E26 Base • 15,000 Rated Life



| ITEM #       | DESCRIPTION                | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW   | CCT   | CRI | CASE QTY. |
|--------------|----------------------------|---------|-------|-------------|--------|-------|-------|-----|-----------|
| L11A19N1527K | NON-DIMMABLE 11W A19 - 27K | 120V    | 11    | 75          | 1100   | 100   | 2700K | 80  | 12        |
| L11A19N1530K | NON-DIMMABLE 11W A19 - 30K | 120V    | 11    | 75          | 1150   | 104.5 | 3000K | 80  | 12        |
| L11A19N1541K | NON-DIMMABLE 11W A19 - 41K | 120V    | 11    | 75          | 1200   | 109.1 | 4100K | 80  | 12        |
| L11A19N1550K | NON-DIMMABLE 11W A19 - 50K | 120V    | 11    | 75          | 1200   | 109.1 | 5000K | 80  | 12        |

## 9W A19 – Dimmable • E26 Base • 25,000 Rated Life



|             |                       |      |   |    |     |      |       |    |    |
|-------------|-----------------------|------|---|----|-----|------|-------|----|----|
| L9A19D2524K | DIMMABLE 9W A19 - 24K | 120V | 9 | 60 | 700 | 77.7 | 2400K | 80 | 12 |
| L9A19D2527K | DIMMABLE 9W A19 - 27K | 120V | 9 | 60 | 800 | 88.9 | 2700K | 80 | 12 |
| L9A19D2530K | DIMMABLE 9W A19 - 30K | 120V | 9 | 60 | 800 | 88.9 | 3000K | 80 | 12 |
| L9A19D2541K | DIMMABLE 9W A19 - 41K | 120V | 9 | 60 | 825 | 91.7 | 4100K | 80 | 12 |
| L9A19D2550K | DIMMABLE 9W A19 - 50K | 120V | 9 | 60 | 825 | 91.7 | 5000K | 80 | 12 |

## 9W A19 – Dimmable • E26 Base • 15,000 Rated Life



|             |                       |      |   |    |     |      |       |    |    |
|-------------|-----------------------|------|---|----|-----|------|-------|----|----|
| L9A19D1527K | DIMMABLE 9W A19 - 27K | 120V | 9 | 60 | 800 | 88.9 | 2700K | 80 | 12 |
| L9A19D1530K | DIMMABLE 9W A19 - 30K | 120V | 9 | 60 | 800 | 88.9 | 3000K | 80 | 12 |
| L9A19D1541K | DIMMABLE 9W A19 - 41K | 120V | 9 | 60 | 825 | 91.7 | 4100K | 80 | 12 |
| L9A19D1550K | DIMMABLE 9W A19 - 50K | 120V | 9 | 60 | 825 | 91.7 | 5000K | 80 | 12 |

## 9W A19 4 Packs – Dimmable • E26 Base • 10,000 Rated Life



|              |                              |      |   |    |     |      |       |    |    |
|--------------|------------------------------|------|---|----|-----|------|-------|----|----|
| L9A19D1527K4 | DIMMABLE 9W A19 4 PACK - 27K | 120V | 9 | 60 | 800 | 88.9 | 2700K | 80 | 12 |
| L9A19D1530K4 | DIMMABLE 9W A19 4 PACK - 30K | 120V | 9 | 60 | 800 | 88.9 | 3000K | 80 | 12 |
| L9A19D1541K4 | DIMMABLE 9W A19 4 PACK - 41K | 120V | 9 | 60 | 800 | 88.9 | 4100K | 80 | 12 |
| L9A19D1550K4 | DIMMABLE 9W A19 4 PACK - 50K | 120V | 9 | 60 | 800 | 88.9 | 5000K | 80 | 12 |

## 9W A19 4 Packs – Non-Dimmable • E26 Base • 15,000 Rated Life



|              |                           |      |   |    |     |      |       |    |    |
|--------------|---------------------------|------|---|----|-----|------|-------|----|----|
| L60A19N1527K | NON-DIMMABLE 9W A19 - 27K | 120V | 9 | 60 | 800 | 88.9 | 2700K | 80 | 12 |
| L60A19N1530K | NON-DIMMABLE 9W A19 - 30K | 120V | 9 | 60 | 800 | 88.9 | 3000K | 80 | 12 |
| L60A19N1541K | NON-DIMMABLE 9W A19 - 41K | 120V | 9 | 60 | 850 | 94.4 | 4100K | 80 | 12 |
| L60A19N1550K | NON-DIMMABLE 9W A19 - 50K | 120V | 9 | 60 | 850 | 94.4 | 5000K | 80 | 12 |

## 9.5W A19 4 Packs – Non-Dimmable • E26 Base • 10,000 Rated Life



|              |                                    |      |     |    |     |      |       |    |    |
|--------------|------------------------------------|------|-----|----|-----|------|-------|----|----|
| L9A19N1027K4 | NON-DIMMABLE 9.5W A19 - 27K 4 PACK | 120V | 9.5 | 60 | 800 | 84.2 | 2700K | 80 | 12 |
| L9A19N1030K4 | NON-DIMMABLE 9.5W A19 - 30K 4 PACK | 120V | 9.5 | 60 | 800 | 84.2 | 3000K | 80 | 12 |
| L9A19N1041K4 | NON-DIMMABLE 9.5W A19 - 41K 4 PACK | 120V | 9.5 | 60 | 800 | 84.2 | 4100K | 80 | 12 |
| L9A19N1050K4 | NON-DIMMABLE 9.5W A19 - 50K 4 PACK | 120V | 9.5 | 60 | 800 | 84.2 | 5000K | 80 | 12 |

120

For the most up-to-date specs and warranty information, please visit [www.tpci.com](http://www.tpci.com)



RoHS COMPLIANT

5 YEAR WARRANTY  
25,000 HOUR LAMPS

3 YEAR WARRANTY  
15,000 HOUR LAMPS

1 YEAR WARRANTY  
10,000 HOUR LAMPS

# LED A Lamps

## 6W A19 4 Packs – Dimmable • E26 Base • 15,000 Rated Life



| ITEM #       | DESCRIPTION           | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | CCT   | CRI | CASE QTY. |
|--------------|-----------------------|---------|-------|-------------|--------|------|-------|-----|-----------|
| L40A19D2524K | DIMMABLE 6W A19 - 24K | 120V    | 6     | 40          | 375    | 62.5 | 2400K | 80  | 12        |
| L40A19D2527K | DIMMABLE 6W A19 - 27K | 120V    | 6     | 40          | 480    | 80   | 2700K | 80  | 12        |
| L40A19D2530K | DIMMABLE 6W A19 - 30K | 120V    | 6     | 40          | 480    | 80   | 3000K | 80  | 12        |
| L40A19D2541K | DIMMABLE 6W A19 - 41K | 120V    | 6     | 40          | 500    | 83.3 | 4100K | 80  | 12        |
| L40A19D2550K | DIMMABLE 6W A19 - 50K | 120V    | 6     | 40          | 525    | 87.2 | 5000K | 80  | 12        |

## 6W A19 4 Packs – Non-Dimmable • E26 Base • 15,000 Rated Life



|             |                           |      |   |    |     |    |       |    |    |
|-------------|---------------------------|------|---|----|-----|----|-------|----|----|
| L6A19N1527K | NON-DIMMABLE 6W A19 - 27K | 120V | 6 | 40 | 480 | 80 | 2700K | 80 | 12 |
| L6A19N1530K | NON-DIMMABLE 6W A19 - 30K | 120V | 6 | 40 | 480 | 80 | 3000K | 80 | 12 |
| L6A19N1541K | NON-DIMMABLE 6W A19 - 41K | 120V | 6 | 40 | 480 | 80 | 4100K | 80 | 12 |
| L6A19N1550K | NON-DIMMABLE 6W A19 - 50K | 120V | 6 | 40 | 480 | 80 | 5000K | 80 | 12 |

## 9.5W A19 – Dimmable • GU24 Base • Omni-Directional • 25,000 Rated Life



|              |                           |      |     |    |     |      |       |    |    |
|--------------|---------------------------|------|-----|----|-----|------|-------|----|----|
| L10A19GUD27K | LED 9.5W A19 GU24 DIM 27K | 120V | 9.5 | 60 | 800 | 84.2 | 2700K | 80 | 12 |
| L10A19GUD30K | LED 9.5W A19 GU24 DIM 30K | 120V | 9.5 | 60 | 850 | 89.5 | 3000K | 80 | 12 |
| L10A19GUD41K | LED 9.5W A19 GU24 DIM 41K | 120V | 9.5 | 60 | 850 | 89.5 | 4100K | 80 | 12 |
| L10A19GUD50K | LED 9.5W A19 GU24 DIM 50K | 120V | 9.5 | 60 | 850 | 89.5 | 5000K | 80 | 12 |

## 14W A21 – Dimmable • GU24 Base • 25,000 Rated Life



|                |                             |      |    |     |      |       |       |    |    |
|----------------|-----------------------------|------|----|-----|------|-------|-------|----|----|
| L14A21GUD2527K | DIMMABLE 14W GU24 A21 - 27K | 120V | 14 | 100 | 1600 | 114.3 | 2700K | 80 | 12 |
| L14A21GUD2530K | DIMMABLE 14W GU24 A21 - 30K | 120V | 14 | 100 | 1600 | 114.3 | 3000K | 80 | 12 |
| L14A21GUD2541K | DIMMABLE 14W GU24 A21 - 41K | 120V | 14 | 100 | 1700 | 121.4 | 4100K | 80 | 12 |
| L14A21GUD2550K | DIMMABLE 14W GU24 A21 - 50K | 120V | 14 | 100 | 1700 | 121.4 | 5000K | 80 | 12 |

## 9.5W A19 – Dimmable • Wet Location Rated • E26 Base • 25,000 Rated Life



|                 |                             |      |     |    |     |      |       |    |    |
|-----------------|-----------------------------|------|-----|----|-----|------|-------|----|----|
| LED10A19DOD27KW | 9.5W WET LOCATION A19 - 27K | 120V | 9.5 | 60 | 800 | 84.2 | 2700K | 80 | 12 |
| LED10A19DOD30KW | 9.5W WET LOCATION A19 - 30K | 120V | 9.5 | 60 | 825 | 86.8 | 3000K | 80 | 12 |
| LED10A19DOD41KW | 9.5W WET LOCATION A19 - 41K | 120V | 9.5 | 60 | 850 | 89.5 | 4100K | 80 | 12 |
| LED10A19DOD50KW | 9.5W WET LOCATION A19 - 50K | 120V | 9.5 | 60 | 850 | 89.5 | 5000K | 80 | 12 |

## 16W/8W/4W Three Way A21 – E26 Base • 25,000 Rated Life



| ITEM #           | DESCRIPTION         | VOLTAGE | WATTAGE/LUMENS |     |     | WATTAGE/LPW |     |     | CCT   | CRI | CASE QTY. |
|------------------|---------------------|---------|----------------|-----|-----|-------------|-----|-----|-------|-----|-----------|
|                  |                     |         | 16W            | 8W  | 4W  | 16W         | 8W  | 4W  |       |     |           |
| LED16A21D3WAY27K | 16W/8W/4W A21 - 27K | 120V    | 1600           | 800 | 480 | 100         | 100 | 120 | 2700K | 80  | 12        |
| LED16A21D3WAY30K | 16W/8W/4W A21 - 30K | 120V    | 1600           | 800 | 480 | 100         | 100 | 120 | 3000K | 80  | 12        |
| LED16A21D3WAY41K | 16W/8W/4W A21 - 41K | 120V    | 1600           | 800 | 480 | 100         | 100 | 120 | 4100K | 80  | 12        |
| LED16A21D3WAY50K | 16W/8W/4W A21 - 50K | 120V    | 1600           | 800 | 480 | 100         | 100 | 120 | 5000K | 80  | 12        |

# LED MR16 Lamps

TCP's MR16 and PAR16 lamps provide high quality light for your directional lighting needs.

## Features & Benefits

- Up to 80% more efficient than incandescent/halogen replacements, providing instant energy savings
- Excellent CBCP and beam quality
- Available in Spot (20°) and Flood (40°) Beam Angles for every application

## Specifications

Color Temperatures ..... 2400K, 2700K, 3000K, 4100K, 5000K  
 Input Line Voltage..... 120 VAC  
 Frequency ..... 50/60HZ  
 CRI..... 80, 90  
 Base..... GU5.3, GU10

### 6.5W/7W Elite Value MR16 – Dimmable • GU5.3 Base • 25,000 Rated Life



| ITEM #             | DESCRIPTION             | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|--------------------|-------------------------|---------|-------|-------------|--------|------|------------|-------|-----|-----------|
| LED712VMR16V24KNFL | 7W 12V MR16 - 24K 20°   | 12V     | 7     | 50          | 450    | 64.3 | 20         | 2400K | 80  | 12        |
| LED712VMR16V24KFL  | 6.5W 12V MR16 - 24K 40° | 12V     | 6.5   | 50          | 450    | 69.2 | 40         | 2400K | 80  | 12        |
| LED712VMR16V27KNFL | 7W 12V MR16 - 27K 20°   | 12V     | 7     | 50          | 500    | 71.4 | 20         | 2700K | 80  | 12        |
| LED712VMR16V27KFL  | 6.5W 12V MR16 - 27K 40° | 12V     | 6.5   | 50          | 500    | 76.9 | 40         | 2700K | 80  | 12        |
| LED712VMR16V30KNFL | 7W 12V MR16 - 30K 20°   | 12V     | 7     | 50          | 500    | 71.4 | 20         | 3000K | 80  | 12        |
| LED712VMR16V30KFL  | 6.5W 12V MR16 - 30K 40° | 12V     | 6.5   | 50          | 500    | 76.9 | 40         | 3000K | 80  | 12        |
| LED712VMR16V41KNFL | 7W 12V MR16 - 41K 20°   | 12V     | 7     | 50          | 500    | 71.4 | 20         | 4100K | 80  | 12        |
| LED712VMR16V41KFL  | 6.5W 12V MR16 - 41K 40° | 12V     | 6.5   | 50          | 500    | 76.9 | 40         | 4100K | 80  | 12        |
| LED712VMR16V50KFL  | 6.5W 12V MR16 - 50K 40° | 12V     | 6.5   | 50          | 500    | 76.9 | 40         | 5000K | 80  | 12        |

### 6.5W/7W Designer Elite High CRI MR16 – Dimmable • GU5.3 Base • CRI>90 R9>50 • 25,000 Rated Life



|                     |                                 |     |     |    |     |      |    |       |    |    |
|---------------------|---------------------------------|-----|-----|----|-----|------|----|-------|----|----|
| LED712VMR16927KNFL  | 7W 12V MR16 - 27K 20°           | 12V | 7   | 50 | 425 | 60.7 | 20 | 2700K | 90 | 12 |
| LED712VMR16927KNFLB | 7W 12V MR16 - 27K 20° - BLACK   | 12V | 7   | 50 | 425 | 60.7 | 20 | 2700K | 90 | 12 |
| LED712VMR16927KFL   | 6.5W 12V MR16 - 27K 40°         | 12V | 6.5 | 50 | 425 | 65.4 | 40 | 2700K | 90 | 12 |
| LED712VMR16927KFLB  | 6.5W 12V MR16 - 27K 40° - BLACK | 12V | 6.5 | 50 | 425 | 65.4 | 40 | 2700K | 90 | 12 |
| LED712VMR16930KNFL  | 7W 12V MR16 - 30K 20°           | 12V | 7   | 50 | 425 | 60.7 | 20 | 3000K | 90 | 12 |
| LED712VMR16930KFL   | 6.5W 12V MR16 - 30K 40°         | 12V | 6.5 | 50 | 425 | 65.4 | 40 | 3000K | 90 | 12 |
| LED712VMR16941KFL   | 6.5W 12V MR16 - 41K 40°         | 12V | 6.5 | 50 | 470 | 72.3 | 40 | 4100K | 80 | 12 |

### 5W Elite Value MR16 – Dimmable • GU5.3 Base • 25,000 Rated Life



|                   |                       |     |   |    |     |    |    |       |    |    |
|-------------------|-----------------------|-----|---|----|-----|----|----|-------|----|----|
| LED512VMR1627KNFL | 5W 12V MR16 - 27K 20° | 12V | 5 | 35 | 400 | 80 | 20 | 2700K | 80 | 12 |
| LED512VMR1627KFL  | 5W 12V MR16 - 27K 40° | 12V | 5 | 35 | 400 | 80 | 40 | 2700K | 80 | 12 |
| LED512VMR1630KNFL | 5W 12V MR16 - 30K 20° | 12V | 5 | 35 | 400 | 80 | 20 | 3000K | 80 | 12 |
| LED512VMR1630KFL  | 5W 12V MR16 - 30K 40° | 12V | 5 | 35 | 400 | 80 | 40 | 3000K | 80 | 12 |
| LED512VMR1641KFL  | 5W 12V MR16 - 41K 40° | 12V | 5 | 35 | 400 | 80 | 40 | 4100K | 80 | 12 |

# LED MR16 Lamps

| ITEM # | DESCRIPTION | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | BEAM ANGLE | CCT | CRI | CASE QTY. |
|--------|-------------|---------|-------|-------------|--------|-----|------------|-----|-----|-----------|
|--------|-------------|---------|-------|-------------|--------|-----|------------|-----|-----|-----------|

## 5W Elite MR16 – Dimmable • GU10 Base • 25,000 Rated Life



|                   |                        |      |   |    |     |    |    |       |    |    |
|-------------------|------------------------|------|---|----|-----|----|----|-------|----|----|
| LED7GU10MR1627KFL | 5W GU10 MR16 - 27K 40° | 120V | 5 | 50 | 385 | 77 | 40 | 2700K | 80 | 12 |
| LED7GU10MR1630KFL | 5W GU10 MR16 - 30K 40° | 120V | 5 | 50 | 385 | 77 | 40 | 3000K | 80 | 12 |
| LED7GU10MR1641KFL | 5W GU10 MR16 - 41K 40° | 120V | 5 | 50 | 385 | 77 | 40 | 4100K | 80 | 12 |

## 5.5W/6W Elite MR16 – Dimmable • GU10 Base • 25,000 Rated Life



|                    |                          |      |     |    |     |      |    |       |    |    |
|--------------------|--------------------------|------|-----|----|-----|------|----|-------|----|----|
| LED7MR16GU1024KFL  | 6W GU10 MR16 - 24K 40°   | 120V | 6   | 50 | 450 | 75   | 40 | 2400K | 80 | 12 |
| LED7MR16GU1027KNFL | 5.5W GU10 MR16 - 27K 20° | 120V | 5.5 | 50 | 500 | 90.9 | 20 | 2700K | 80 | 12 |
| LED7MR16GU1027KFL  | 6W GU10 MR16 - 27K 40°   | 120V | 6   | 50 | 500 | 83.3 | 40 | 2700K | 80 | 12 |
| LED7MR16GU1030KNFL | 5.5W GU10 MR16 - 30K 20° | 120V | 5.5 | 50 | 500 | 90.9 | 20 | 3000K | 80 | 12 |
| LED7MR16GU1030KFL  | 6W GU10 MR16 - 30K 40°   | 120V | 6   | 50 | 500 | 83.3 | 40 | 3000K | 80 | 12 |
| LED7MR16GU1041KNFL | 5.5W GU10 MR16 - 41K 20° | 120V | 5.5 | 50 | 500 | 90.9 | 20 | 4100K | 80 | 12 |
| LED7MR16GU1041KFL  | 6W GU10 MR16 - 41K 40°   | 120V | 6   | 50 | 500 | 83.3 | 40 | 4100K | 80 | 12 |

# LED PAR16 Lamps

## Features & Benefits

- Up to 85% more efficient than incandescent/halogen replacements, providing instant energy savings
- Wet location rated for outdoor use
- Available in Flood, Narrow Flood, Wide Flood and Spot Beam Angles for every application

## Specifications

Color Temperatures .... 2400K, 2700K, 3000K, 4100K  
 Input Line Voltage..... 120 VAC  
 Frequency .....50/60HZ  
 Lamp Life (Rated)..... 25,000 hours  
 CRI..... 80, 90  
 Base..... E26

| ITEM # | DESCRIPTION | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | CBCP | BEAM ANGLE | CCT | CRI | CASE QTY. |
|--------|-------------|---------|-------|-------------|--------|-----|------|------------|-----|-----|-----------|
|--------|-------------|---------|-------|-------------|--------|-----|------|------------|-----|-----|-----------|

## 7W PAR16 – Dimmable • GU5.3 Base • 25,000 Rated Life



|               |                    |      |   |    |     |      |      |    |       |    |    |
|---------------|--------------------|------|---|----|-----|------|------|----|-------|----|----|
| LED7P1624KFL  | 7W PAR16 - 24K 40° | 120V | 7 | 50 | 400 | 57.1 | 1052 | 40 | 2400K | 80 | 12 |
| LED7P1627KNFL | 7W PAR16 - 27K 20° | 120V | 7 | 50 | 550 | 78.6 | 3296 | 20 | 2700K | 80 | 12 |
| LED7P1627KFL  | 7W PAR16 - 27K 40° | 120V | 7 | 50 | 550 | 78.6 | 1057 | 40 | 2700K | 80 | 12 |
| LED7P1630KNFL | 7W PAR16 - 30K 20° | 120V | 7 | 50 | 600 | 85.7 | 3296 | 20 | 3000K | 80 | 12 |
| LED7P1630KFL  | 7W PAR16 - 30K 40° | 120V | 7 | 50 | 600 | 85.7 | 1057 | 40 | 3000K | 80 | 12 |
| LED7P1641KNFL | 7W PAR16 - 41K 20° | 120V | 7 | 50 | 625 | 89.3 | 3296 | 20 | 4100K | 80 | 12 |
| LED7P1641KFL  | 7W PAR16 - 41K 40° | 120V | 7 | 50 | 625 | 89.3 | 1057 | 40 | 4100K | 80 | 12 |

# LED Deco Lamps

TCP's range of LED Deco Lamps provide high quality, energy-efficient lighting that mimics the look and feel of traditional incandescent lighting.

## Features & Benefits

- Up to 80% more efficient than incandescent/halogen replacements, providing instant energy savings
- Smooth, uniform dimming from 100% to 10% on selected models
- Excellent color consistency and high color rendering

## Specifications

Color Temperatures ..... 2400K, 2700K, 3000K, 3500K, 4100K, 5000K  
 Input Line Voltage..... 120 VAC  
 Frequency ..... 50/60HZ  
 CRI..... 80  
 Base..... E12, E26

### 4W/6W Elite G25 – Dimmable • E26 Base • 25,000 Rated Life



| ITEM #       | DESCRIPTION                 | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | CCT   | CRI | CASE QTY. |
|--------------|-----------------------------|---------|-------|-------------|--------|------|-------|-----|-----------|
| LED5G25D27KF | DIMMABLE 4W G25 - 27K FROST | 120V    | 4     | 40          | 350    | 87.5 | 2700K | 80  | 12        |
| LED5G25D30KF | DIMMABLE 4W G25 - 30K FROST | 120V    | 4     | 40          | 350    | 87.5 | 3000K | 80  | 12        |
| L6G25D2527KF | DIMMABLE 6W G25 - 27K FROST | 120V    | 6     | 60          | 525    | 87.5 | 2700K | 80  | 12        |
| L6G25D2530KF | DIMMABLE 6W G25 - 30K FROST | 120V    | 6     | 60          | 525    | 87.5 | 3000K | 80  | 12        |

### 4W S14 – Non-Dimmable • Wet Location Rated • E26 Base • 25,000 Rated Life



|               |                                     |      |   |    |     |    |       |    |    |
|---------------|-------------------------------------|------|---|----|-----|----|-------|----|----|
| LED5E26S1427K | LED 4W WET LOCATION S14 - 27K CLEAR | 120V | 4 | 40 | 300 | 75 | 2700K | 80 | 12 |
| LED5E26S1430K | LED 4W WET LOCATION S14 - 30K CLEAR | 120V | 4 | 40 | 300 | 75 | 3000K | 80 | 12 |
| LED5E26S1441K | LED 4W WET LOCATION S14 - 41K CLEAR | 120V | 4 | 40 | 300 | 75 | 4100K | 80 | 12 |



|                |                                     |      |   |    |     |    |       |    |    |
|----------------|-------------------------------------|------|---|----|-----|----|-------|----|----|
| LED5E26S1427KF | LED 4W WET LOCATION S14 - 27K FROST | 120V | 4 | 40 | 300 | 75 | 2700K | 80 | 12 |
| LED5E26S1430KF | LED 4W WET LOCATION S14 - 30K FROST | 120V | 4 | 40 | 300 | 75 | 3000K | 80 | 12 |
| LED5E26S1441KF | LED 4W WET LOCATION S14 - 41K FROST | 120V | 4 | 40 | 300 | 75 | 4100K | 80 | 12 |

# LED Deco Lamps

| ITEM # | DESCRIPTION | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | CCT | CRI | CASE QTY. |
|--------|-------------|---------|-------|-------------|--------|-----|-----|-----|-----------|
|--------|-------------|---------|-------|-------------|--------|-----|-----|-----|-----------|

## 3.5W/5W Deco Lamps – Dimmable • 25,000 Rated Life



|                |                                         |      |     |    |     |      |       |    |    |
|----------------|-----------------------------------------|------|-----|----|-----|------|-------|----|----|
| LED4E12G1627K  | LED 3.5W DIM CANDELABRA G16 GLOBE - 27K | 120V | 3.5 | 25 | 280 | 80   | 2700K | 80 | 12 |
| LED4E26G1627K  | LED 3.5W DIM G16 GLOBE - 27K            | 120V | 3.5 | 25 | 280 | 80   | 2700K | 80 | 12 |
| LED4E12G1627KF | LED 3.5W DIM E12 FROST G16 GLOBE - 27K  | 120V | 3.5 | 25 | 280 | 80   | 2700K | 80 | 12 |
| LED4E26G1627KF | LED 3.5W DIM FROST G16 GLOBE - 27K      | 120V | 3.5 | 25 | 280 | 80   | 2700K | 80 | 12 |
| LED5E12G1627K  | LED 5W DIM E12 G16 GLOBE - 27K          | 120V | 5   | 40 | 350 | 70   | 2700K | 80 | 12 |
| LED5E26G1627K  | LED 5W DIM G16 GLOBE - 27K              | 120V | 5   | 40 | 350 | 70   | 2700K | 80 | 12 |
| LED5E12G1627KF | LED 5W DIM E12 G16 GLOBE - 27K          | 120V | 5   | 40 | 350 | 70   | 2700K | 80 | 12 |
| LED5E26G1627KF | LED 5W DIM FROST G16 GLOBE - 27K        | 120V | 5   | 40 | 350 | 70   | 2700K | 80 | 12 |
| LED4E12B1124K  | LED 3.5W DIM E12 BLUNT TIP - 24K        | 120V | 3.5 | 25 | 250 | 71.4 | 2400K | 80 | 12 |
| LED4E12B1127K  | LED 3.5W DIM E12 BLUNT TIP - 27K        | 120V | 3.5 | 25 | 280 | 80   | 2700K | 80 | 12 |
| LED4E26B1124K  | LED 3.5W DIM BLUNT TIP - 24K            | 120V | 3.5 | 25 | 250 | 71.4 | 2400K | 80 | 12 |
| LED4E26B1127K  | LED 3.5W DIM BLUNT TIP - 27K            | 120V | 3.5 | 25 | 280 | 80   | 2700K | 80 | 12 |
| LED4E12B1127KF | LED 3.5W DIM E12 FROST BLUNT TIP - 27K  | 120V | 3.5 | 25 | 280 | 80   | 2700K | 80 | 12 |
| LED4E26B1127KF | LED 3.5W DIM FROST BLUNT TIP - 27K      | 120V | 3.5 | 25 | 280 | 80   | 2700K | 80 | 12 |
| LED5E12B1127K  | LED 5W DIM E12 BLUNT TIP - 27K          | 120V | 5   | 40 | 350 | 70   | 2700K | 80 | 12 |
| LED5E12B1130K  | LED 5W DIM E12 BLUNT TIP - 30K          | 120V | 5   | 40 | 375 | 75   | 3000K | 80 | 12 |
| LED5E12B1150K  | LED 5W DIM E12 BLUNT TIP - 50K          | 120V | 5   | 40 | 375 | 75   | 5000K | 80 | 12 |
| LED5E26B1127K  | LED 5W DIM BLUNT TIP - 27K              | 120V | 5   | 40 | 350 | 70   | 2700K | 80 | 12 |
| LED5E26B1130K  | LED 5W DIM BLUNT TIP - 30K              | 120V | 5   | 40 | 375 | 75   | 3000K | 80 | 12 |
| LED5E12B1124KF | LED 5W DIM E12 FROST BLUNT TIP - 24K    | 120V | 5   | 40 | 300 | 60   | 2400K | 80 | 12 |
| LED5E12B1127KF | LED 5W DIM E12 FROST BLUNT TIP - 27K    | 120V | 5   | 40 | 350 | 70   | 2700K | 80 | 12 |
| LED5E12B1150KF | LED 5W DIM E12 FROST BLUNT TIP - 50K    | 120V | 5   | 40 | 375 | 75   | 5000K | 80 | 12 |
| LED5E26B1127KF | LED 5W DIM FROST BLUNT TIP - 27K        | 120V | 5   | 40 | 350 | 70   | 2700K | 80 | 12 |
| LED4E12F1127K  | LED 3.5W DIM E12 F11 FLAME - 27K        | 120V | 3.5 | 25 | 280 | 80   | 2700K | 80 | 12 |
| LED4E26F1127K  | LED 3.5W DIM F11 FLAME TIP - 27K        | 120V | 3.5 | 25 | 280 | 80   | 2700K | 80 | 12 |
| LED5E12F1127K  | LED 5W DIM E12 F11 FLAME TIP - 27K      | 120V | 5   | 40 | 350 | 70   | 2700K | 80 | 12 |
| LED5E26F1127K  | LED 5W DIM F11 FLAME TIP - 27K          | 120V | 5   | 40 | 350 | 70   | 2700K | 80 | 12 |

# 120-277V LED Lamps

TCP's LED Universal Voltage 120-277V Lamps are now available in A-lamps, BR30s and PAR38s shapes.

## Features & Benefits

- Up to 85% more efficient than incandescent/halogen replacements, providing instant energy savings
- PAR lamps are wet location rated for outdoor use
- Excellent color consistency and CRI

## Specifications

Color Temperatures ..... 2700K, 3000K, 3500K, 4000K, 5000K  
 Input Line Voltage..... 120 VAC  
 Frequency ..... 50/60HZ  
 Lamp Life (Rated)..... 25,000 hours  
 CRI..... 80, 90  
 Base..... GU5.3, GU10

| ITEM # | DESCRIPTION | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | CCT | CRI | BEAM ANGLE | CBCP | CASE QTY. |
|--------|-------------|---------|-------|-------------|--------|-----|-----|-----|------------|------|-----------|
|--------|-------------|---------|-------|-------------|--------|-----|-----|-----|------------|------|-----------|

### 20W PAR30 – Non-Dimmable • E26 Base • 25,000 Rated Life



|                    |                                |          |    |    |      |      |       |    |    |      |    |
|--------------------|--------------------------------|----------|----|----|------|------|-------|----|----|------|----|
| L20P30N25UNV27KFL  | LED P30 HO 90 27K FL 120-277V  | 120-277V | 20 | 75 | 1800 | 90.0 | 2700K | 90 | 40 | –    | 12 |
| L20P30N25UNV27KNFL | LED P30 HO 90 27K NFL 120-277V | 120-277V | 20 | 75 | 1800 | 90.0 | 2700K | 90 | 25 | –    | 12 |
| L20P30N25UNV30KFL  | LED P30 HO 90 30K FL 120-277V  | 120-277V | 20 | 75 | 1850 | 92.5 | 3000K | 90 | 40 | 2666 | 12 |
| L20P30N25UNV30KNFL | LED P30 HO 90 30K NFL 120-277V | 120-277V | 20 | 75 | 1850 | 92.5 | 3000K | 90 | 25 | 4322 | 12 |
| L20P30N25UNV40KFL  | LED P30 HO 90 40K FL 120-277V  | 120-277V | 20 | 75 | 1900 | 95.0 | 4000K | 90 | 40 | 2628 | 12 |
| L20P30N25UNV40KNFL | LED P30 HO 90 40K NFL 120-277V | 120-277V | 20 | 75 | 1900 | 95.0 | 4000K | 90 | 25 | 4460 | 12 |
| L20P30N25UNV50KFL  | LED P30 HO 90 50K FL 120-277V  | 120-277V | 20 | 75 | 1900 | 95.0 | 5000K | 90 | 40 | –    | 12 |
| L20P30N25UNV50KNFL | LED P30 HO 90 50K NFL 120-277V | 120-277V | 20 | 75 | 1900 | 95.0 | 5000K | 90 | 25 | –    | 12 |

### 12.5W PAR38 – Non-Dimmable • E26 Base • 25,000 Rated Life



|                     |                                       |          |      |     |      |    |       |    |    |      |    |
|---------------------|---------------------------------------|----------|------|-----|------|----|-------|----|----|------|----|
| L100P38N25UNV27KFL  | LED 120W PAR38 UNV - 27K FLOOD        | 120-277V | 12.5 | 120 | 1100 | 88 | 2700K | 80 | 40 | 2630 | 12 |
| L100P38N25UNV27KNFL | LED 120W PAR38 UNV - 27K NARROW FLOOD | 120-277V | 12.5 | 120 | 1100 | 88 | 2700K | 80 | 25 | 2613 | 12 |
| L100P38N25UNV30KFL  | LED 120W PAR38 UNV - 30K FLOOD        | 120-277V | 12.5 | 120 | 1100 | 88 | 3000K | 80 | 40 | 2532 | 12 |
| L100P38N25UNV30KNFL | LED 120W PAR38 UNV - 30K NARROW FLOOD | 120-277V | 12.5 | 120 | 1100 | 88 | 3000K | 80 | 25 | 2641 | 12 |
| L100P38N25UNV40KFL  | LED 120W PAR38 UNV - 40K FLOOD        | 120-277V | 12.5 | 120 | 1150 | 92 | 4000K | 80 | 40 | 6245 | 12 |
| L100P38N25UNV40KNFL | LED 120W PAR38 UNV - 40K NARROW FLOOD | 120-277V | 12.5 | 120 | 1150 | 92 | 4000K | 80 | 25 | 6334 | 12 |
| L100P38N25UNV50KFL  | LED 120W PAR38 UNV - 50K FLOOD        | 120-277V | 12.5 | 120 | 1200 | 96 | 5000K | 80 | 40 | 6412 | 12 |
| L100P38N25UNV50KNFL | LED 120W PAR38 UNV - 50K NARROW FLOOD | 120-277V | 12.5 | 120 | 1200 | 96 | 5000K | 80 | 25 | 6572 | 12 |

# 120-277V LED Lamps

## 24W A23 – Non-Dimmable • E26 Base • 25,000 Rated Life • Includes E26 to E39 Adapter



| ITEM #           | DESCRIPTION            | VOLTAGE  | WATTS | WATT EQUIV. | LUMENS | LPW | CCT   | CRI | BEAM ANGLE | CBCP | CASE QTY. |
|------------------|------------------------|----------|-------|-------------|--------|-----|-------|-----|------------|------|-----------|
| L200A23N25UNV27K | LED 200W A23 UNV - 27K | 120-277V | 24    | 200         | 3000   | 125 | 2700K | 80  | OMNI       | –    | 48        |
| L200A23N25UNV30K | LED 200W A23 UNV - 30K | 120-277V | 24    | 200         | 3000   | 125 | 3000K | 80  | OMNI       | –    | 48        |
| L200A23N25UNV41K | LED 200W A23 UNV - 41K | 120-277V | 24    | 200         | 3000   | 125 | 4100K | 80  | OMNI       | –    | 48        |
| L200A23N25UNV50K | LED 200W A23 UNV - 50K | 120-277V | 24    | 200         | 3000   | 125 | 5000K | 80  | OMNI       | –    | 48        |

## 18W A23 – Non-Dimmable • E26 Base • 25,000 Rated Life



|                  |                        |          |    |     |      |       |       |    |      |   |    |
|------------------|------------------------|----------|----|-----|------|-------|-------|----|------|---|----|
| L125A23N25UNV27K | LED 125W A23 UNV - 27K | 120-277V | 18 | 125 | 2000 | 111.1 | 2700K | 80 | OMNI | – | 48 |
| L125A23N25UNV30K | LED 125W A23 UNV - 30K | 120-277V | 18 | 125 | 2000 | 111.1 | 3000K | 80 | OMNI | – | 48 |
| L125A23N25UNV40K | LED 125W A23 UNV - 40K | 120-277V | 18 | 125 | 2100 | 116.7 | 4000K | 80 | OMNI | – | 48 |
| L125A23N25UNV50K | LED 125W A23 UNV - 50K | 120-277V | 18 | 125 | 2200 | 122.2 | 5000K | 80 | OMNI | – | 48 |

## 14W A21 – Non-Dimmable • E26 Base • 25,000 Rated Life



|                  |                        |          |    |     |      |       |       |    |      |   |    |
|------------------|------------------------|----------|----|-----|------|-------|-------|----|------|---|----|
| L100A21N25UNV27K | LED 100W A21 UNV - 27K | 120-277V | 14 | 100 | 1600 | 114.3 | 2700K | 80 | OMNI | – | 48 |
| L100A21N25UNV30K | LED 100W A21 UNV - 30K | 120-277V | 14 | 100 | 1625 | 116.1 | 3000K | 80 | OMNI | – | 48 |
| L100A21N25UNV40K | LED 100W A21 UNV - 40K | 120-277V | 14 | 100 | 1650 | 117.9 | 4000K | 80 | OMNI | – | 48 |
| L100A21N25UNV50K | LED 100W A21 UNV - 50K | 120-277V | 14 | 100 | 1650 | 117.9 | 5000K | 80 | OMNI | – | 48 |

## 7.5W A19 – Non-Dimmable • E26 Base • 25,000 Rated Life



|                 |                       |          |     |    |     |       |       |    |      |   |    |
|-----------------|-----------------------|----------|-----|----|-----|-------|-------|----|------|---|----|
| L60A19N25UNV27K | LED 60W A19 UNV - 27K | 120-277V | 7.5 | 60 | 800 | 106.7 | 2700K | 80 | OMNI | – | 48 |
| L60A19N25UNV30K | LED 60W A19 UNV - 30K | 120-277V | 7.5 | 60 | 800 | 106.7 | 3000K | 80 | OMNI | – | 48 |
| L60A19N25UNV40K | LED 60W A19 UNV - 40K | 120-277V | 7.5 | 60 | 850 | 113.3 | 4000K | 80 | OMNI | – | 48 |
| L60A19N25UNV50K | LED 60W A19 UNV - 50K | 120-277V | 7.5 | 60 | 875 | 116.7 | 5000K | 80 | OMNI | – | 48 |

## 9.5W BR30 – Non-Dimmable • E26 Base • 25,000 Rated Life



|                  |                        |          |     |    |      |       |       |    |     |   |    |
|------------------|------------------------|----------|-----|----|------|-------|-------|----|-----|---|----|
| L65BR30N25UNV27K | LED 65W BR30 UNV - 27K | 120-277V | 9.5 | 65 | 900  | 94.7  | 2700K | 80 | 110 | – | 12 |
| L65BR30N25UNV30K | LED 65W BR30 UNV - 30K | 120-277V | 9.5 | 65 | 900  | 94.7  | 3000K | 80 | 110 | – | 12 |
| L65BR30N25UNV40K | LED 65W BR30 UNV - 40K | 120-277V | 9.5 | 65 | 925  | 97.4  | 4000K | 80 | 110 | – | 12 |
| L65BR30N25UNV50K | LED 65W BR30 UNV - 50K | 120-277V | 9.5 | 65 | 1000 | 105.2 | 5000K | 80 | 110 | – | 12 |

## 13W BR30 – Non-Dimmable • E26 Base • 25,000 Rated Life



|                   |                         |          |    |     |      |       |       |    |     |   |    |
|-------------------|-------------------------|----------|----|-----|------|-------|-------|----|-----|---|----|
| L100BR30N25UNV27K | LED 100W BR30 UNV - 27K | 120-277V | 13 | 100 | 1400 | 107.7 | 2700K | 80 | 110 | – | 12 |
| L100BR30N25UNV30K | LED 100W BR30 UNV - 30K | 120-277V | 13 | 100 | 1450 | 111.5 | 3000K | 80 | 110 | – | 12 |
| L100BR30N25UNV40K | LED 100W BR30 UNV - 40K | 120-277V | 13 | 100 | 1500 | 115.4 | 4000K | 80 | 110 | – | 12 |
| L100BR30N25UNV50K | LED 100W BR30 UNV - 50K | 120-277V | 13 | 100 | 1550 | 119.2 | 5000K | 80 | 110 | – | 12 |

# Allusion LED Lamps



Allusion Lamps feature smooth warm dimming – giving an incandescent effect with the efficiency of LED lighting.

## Features & Benefits

- Up to 85% more efficient than incandescent/halogen replacements, providing instant energy savings
- Smooth warm dimming creates the perfect atmosphere

## Specifications

Color Temperatures ..... 3000K to 2000K  
 3000K to 1800K  
 Frequency ..... 50/60HZ  
 Base ..... E12, E26

| ITEM #                                                                                             | DESCRIPTION                  | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | CCT            | BEAM ANGLE | CRI | CASE QTY. |
|----------------------------------------------------------------------------------------------------|------------------------------|---------|-------|-------------|--------|------|----------------|------------|-----|-----------|
| <b>12.5W Allusion PAR38 – Smooth Warm Dimming • E26 Base • 25,000 Rated Life</b>                   |                              |         |       |             |        |      |                |            |     |           |
|  L15P38DNFLA      | 12.5W PAR38 NARROW FLOOD     | 120V    | 12.5  | 90W         | 975    | 78   | 3000K TO 2000K | 25         | 80  | 12        |
|  L15P38DFLA       | 12.5W PAR38 FLOOD            | 120V    | 12.5  | 90W         | 975    | 78   | 3000K TO 2000K | 40         | 80  | 12        |
| <b>12.5W Allusion PAR30 – Smooth Warm Dimming • E26 Base • 25,000 Rated Life</b>                   |                              |         |       |             |        |      |                |            |     |           |
|  L15P30DNFLA      | 12.5W PAR30 NARROW FLOOD     | 120V    | 12.5  | 90          | 950    | 76   | 3000K TO 2000K | 25         | 80  | 12        |
|  L15P30DFLA       | 12.5W PAR30 FLOOD            | 120V    | 12.5  | 90          | 950    | 76   | 3000K TO 2000K | 40         | 80  | 12        |
| <b>6.5W Allusion PAR20 – Smooth Warm Dimming • E26 Base • 25,000 Rated Life</b>                    |                              |         |       |             |        |      |                |            |     |           |
|  L7P20DNFLA      | 6.5W PAR20 NARROW FLOOD      | 120V    | 6.5   | 50          | 525    | 80.8 | 3000K TO 2000K | 25         | 80  | 12        |
|  L7P20DFLA      | 6.5W PAR20 FLOOD             | 120V    | 6.5   | 50          | 525    | 80.8 | 3000K TO 2000K | 40         | 80  | 12        |
| <b>6W Allusion MR16 – Smooth Warm Dimming • E26 Base • 25,000 Rated Life</b>                       |                              |         |       |             |        |      |                |            |     |           |
|  L712VMR16DNFLA | 6W MR16 NARROW FLOOD         | 120V    | 6     | 50          | 350    | 58.3 | 3000K TO 1800K | 20         | 80  | 12        |
| <b>13W Allusion SL16 – Smooth Warm Dimming • E26 Base • 30,000 Rated Life</b>                      |                              |         |       |             |        |      |                |            |     |           |
|  L15SL16D30A    | 13W SL16                     | 120V    | 13    | –           | 1200   | 92.3 | 3000K TO 2000K | 110        | 80  | 6         |
| <b>11W Allusion 5”/6” Recessed Downlight – Smooth Warm Dimming • 25,000 Rated Life</b>             |                              |         |       |             |        |      |                |            |     |           |
|  LED10DR56DA    | 11W 5”/6” RECESSED DOWNLIGHT | 120V    | 11    | 65          | 1100   | 100  | 3000K TO 2000K | 120        | 80  | 6         |
| <b>10W Allusion BR30 – Smooth Warm Dimming • E26 Base • 25,000 Rated Life</b>                      |                              |         |       |             |        |      |                |            |     |           |
|  LED10BR30DA    | 10W BR30                     | 120V    | 10    | 65          | 675    | 67.5 | 3000K TO 2000K | 110        | 80  | 12        |
| <b>9W Allusion A19 – Smooth Warm Dimming • E26 Base • 25,000 Rated Life</b>                        |                              |         |       |             |        |      |                |            |     |           |
|  LED9A19DA      | 9W A19 A-LAMP                | 120V    | 9     | 60          | 650    | 72.2 | 2700K TO 2000K | –          | 80  | 12        |

# Pro Line LED Lamps



For an affordable LED upgrade, switch to TCP's Pro Line LED Lamps. Pro Line LEDs are available in multiple shapes from A-Lamps, to BR30 and PAR38 lamps.

## Features & Benefits

- Long life: 15,000 hours minimizes replacement and maintenance costs
- Inexpensive alternative for cost-sensitive projects

## Specifications

Color Temperatures ..... 2700K, 3000K, 4100K  
 Frequency ..... 50/60HZ  
 Lamp Life (Rated)..... 15,000 hours

### 13W Pro Line PAR38 – Dimmable • E26 Base • 15,000 Rated Life



| ITEM #          | DESCRIPTION                      | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW  | CBCP | BEAM ANGLE | CCT   | CRI | CASE QTY. |
|-----------------|----------------------------------|---------|-------|-------------|--------|------|------|------------|-------|-----|-----------|
| L90P38D15V30KFL | 13W DIMMABLE PAR38 - 30K 40° PRO | 120V    | 13    | 90          | 1100   | 84.6 | –    | 40         | 3000K | 80  | 12        |

### 13W Pro Line PAR38 2 Pack – Dimmable • E26 Base • 15,000 Rated Life

|                  |                                         |      |    |    |      |      |   |    |       |    |    |
|------------------|-----------------------------------------|------|----|----|------|------|---|----|-------|----|----|
| L90P38D15V30KFL2 | 13W DIMMABLE PAR38 - 30K 40° PRO 2 PACK | 120V | 13 | 90 | 1100 | 84.6 | – | 40 | 3000K | 80 | 12 |
|------------------|-----------------------------------------|------|----|----|------|------|---|----|-------|----|----|

|                  |                                         |      |    |    |      |      |   |    |       |    |    |
|------------------|-----------------------------------------|------|----|----|------|------|---|----|-------|----|----|
| L90P38D15V41KFL2 | 13W DIMMABLE PAR38 - 41K 40° PRO 2 PACK | 120V | 13 | 90 | 1100 | 84.6 | – | 40 | 4100K | 80 | 12 |
|------------------|-----------------------------------------|------|----|----|------|------|---|----|-------|----|----|

### 9W Pro Line PAR30 – Dimmable • E26 Base • 15,000 Rated Life



|                 |                                     |      |   |    |     |    |   |    |       |    |    |
|-----------------|-------------------------------------|------|---|----|-----|----|---|----|-------|----|----|
| L75P30D15V30KFL | LED 9W DIMMABLE PAR30 - 30K 40° PRO | 120V | 9 | 75 | 720 | 80 | – | 40 | 3000K | 80 | 12 |
|-----------------|-------------------------------------|------|---|----|-----|----|---|----|-------|----|----|

### 7W Pro Line PAR20 – Dimmable • E26 Base • 15,000 Rated Life



|                 |                                     |      |   |    |     |    |   |    |       |    |    |
|-----------------|-------------------------------------|------|---|----|-----|----|---|----|-------|----|----|
| L50P20D15V30KFL | LED 7W DIMMABLE PAR20 - 30K 40° PRO | 120V | 7 | 50 | 525 | 75 | – | 40 | 3000K | 80 | 12 |
|-----------------|-------------------------------------|------|---|----|-----|----|---|----|-------|----|----|

### Pro Line BRs – Dimmable • E26 Base • 15,000 Rated Life



|                |                                 |      |    |    |      |      |     |   |       |    |   |
|----------------|---------------------------------|------|----|----|------|------|-----|---|-------|----|---|
| L75BR40D15V27K | LED 14W DIMMABLE BR40 - 27K PRO | 120V | 14 | 75 | 1065 | 76.1 | 110 | – | 2700K | 80 | 6 |
|----------------|---------------------------------|------|----|----|------|------|-----|---|-------|----|---|

|                |                                |      |   |    |     |      |     |   |       |    |   |
|----------------|--------------------------------|------|---|----|-----|------|-----|---|-------|----|---|
| L65BR30D15V27K | LED 9W DIMMABLE BR30 - 27K PRO | 120V | 9 | 65 | 665 | 73.9 | 110 | – | 2700K | 80 | 6 |
|----------------|--------------------------------|------|---|----|-----|------|-----|---|-------|----|---|

### 7.5W Pro Line R20 – Dimmable • E26 Base • 15,000 Rated Life



|               |                                 |      |     |    |     |      |     |   |       |    |    |
|---------------|---------------------------------|------|-----|----|-----|------|-----|---|-------|----|----|
| L50R20D15V27K | LED 7.5W DIMMABLE R20 - 27K PRO | 120V | 7.5 | 50 | 500 | 66.7 | 110 | – | 2700K | 80 | 12 |
|---------------|---------------------------------|------|-----|----|-----|------|-----|---|-------|----|----|

### Pro Line A19s – Non-Dimmable • E26 Base • 15,000 Rated Life



|                |                                |      |    |     |      |       |   |   |       |    |    |
|----------------|--------------------------------|------|----|-----|------|-------|---|---|-------|----|----|
| L100A19N15V27K | NON DIMMABLE 14W A19 - 27K PRO | 120V | 14 | 100 | 1500 | 107.1 | – | – | 2700K | 80 | 12 |
|----------------|--------------------------------|------|----|-----|------|-------|---|---|-------|----|----|

|               |                               |      |   |    |     |      |   |   |       |    |    |
|---------------|-------------------------------|------|---|----|-----|------|---|---|-------|----|----|
| L60A19N15V27K | NON DIMMABLE 9W A19 - 27K PRO | 120V | 9 | 60 | 800 | 88.9 | – | – | 2700K | 80 | 12 |
|---------------|-------------------------------|------|---|----|-----|------|---|---|-------|----|----|

# LED Type A PL Lamps

## 9W Vertical BR30 PL Lamp – Dimmable • 50,000 Rated Life



| ITEM #      | DESCRIPTION                        | VOLTAGE  | WATTS | WATT EQUIV. | LUMENS | LPW   | CCT   | CRI | BASE TYPE    | CASE QTY. |
|-------------|------------------------------------|----------|-------|-------------|--------|-------|-------|-----|--------------|-----------|
| L9PLVD5027K | 9W DIMMABLE VERTICAL BR30 PL - 27K | 120-277V | 9     | 13-18       | 1050   | 116.7 | 2700K | 80  | G24Q / GX24Q | 12        |
| L9PLVD5030K | 9W DIMMABLE VERTICAL BR30 PL - 30K | 120-277V | 9     | 13-18       | 1100   | 122.2 | 3000K | 80  | G24Q / GX24Q | 12        |
| L9PLVD5041K | 9W DIMMABLE VERTICAL BR30 PL - 41K | 120-277V | 9     | 13-18       | 1150   | 127.8 | 4100K | 80  | G24Q / GX24Q | 12        |
| L9PLVD5050K | 9W DIMMABLE VERTICAL BR30 PL - 50K | 120-277V | 9     | 13-18       | 1175   | 130.6 | 5000K | 80  | G24Q / GX24Q | 12        |

## 17W Vertical BR30 PL Lamp – Dimmable • 50,000 Rated Life



|              |                                     |          |    |    |      |       |       |    |              |    |
|--------------|-------------------------------------|----------|----|----|------|-------|-------|----|--------------|----|
| L17PLVD5027K | 17W DIMMABLE VERTICAL BR30 PL - 27K | 120-277V | 17 | 26 | 1700 | 100   | 2700K | 80 | G24Q / GX24Q | 12 |
| L17PLVD5030K | 17W DIMMABLE VERTICAL BR30 PL - 30K | 120-277V | 17 | 26 | 1800 | 105.8 | 3000K | 80 | G24Q / GX24Q | 12 |
| L17PLVD5041K | 17W DIMMABLE VERTICAL BR30 PL - 41K | 120-277V | 17 | 26 | 1900 | 111.7 | 4100K | 80 | G24Q / GX24Q | 12 |
| L17PLVD5050K | 17W DIMMABLE VERTICAL BR30 PL - 50K | 120-277V | 17 | 26 | 1950 | 114.7 | 5000K | 80 | G24Q / GX24Q | 12 |

## 19W Vertical BR40 PL Lamp – Dimmable • 50,000 Rated Life



|              |                                     |          |    |       |      |       |       |    |              |    |
|--------------|-------------------------------------|----------|----|-------|------|-------|-------|----|--------------|----|
| L19PLVD5027K | 19W DIMMABLE VERTICAL BR40 PL - 27K | 120-277V | 19 | 26-42 | 2350 | 123.7 | 2700K | 80 | G24Q / GX24Q | 12 |
| L19PLVD5030K | 19W DIMMABLE VERTICAL BR40 PL - 30K | 120-277V | 19 | 26-42 | 2400 | 126.3 | 3000K | 80 | G24Q / GX24Q | 12 |
| L19PLVD5041K | 19W DIMMABLE VERTICAL BR40 PL - 41K | 120-277V | 19 | 26-42 | 2450 | 128.9 | 4100K | 80 | G24Q / GX24Q | 12 |
| L19PLVD5050K | 19W DIMMABLE VERTICAL BR40 PL - 50K | 120-277V | 19 | 26-42 | 2480 | 130.5 | 5000K | 80 | G24Q / GX24Q | 12 |

## 11W Quad PL Lamp – Non-Dimmable • 25,000 Rated Life



|              |                                          |          |    |          |     |      |       |    |              |    |
|--------------|------------------------------------------|----------|----|----------|-----|------|-------|----|--------------|----|
| LPL426A2527K | 11W NON DIMMABLE UNIVERSAL QUAD PL - 27K | 120-277V | 11 | 13-18-26 | 950 | 86.4 | 2700K | 80 | G24Q / GX24Q | 12 |
| LPL426A2530K | 11W NON DIMMABLE UNIVERSAL QUAD PL - 30K | 120-277V | 11 | 13-18-26 | 950 | 86.4 | 3000K | 80 | G24Q / GX24Q | 12 |
| LPL426A2535K | 11W NON DIMMABLE UNIVERSAL QUAD PL - 35K | 120-277V | 11 | 13-18-26 | 950 | 86.4 | 3500K | 80 | G24Q / GX24Q | 12 |
| LPL426A2541K | 11W NON DIMMABLE UNIVERSAL QUAD PL - 41K | 120-277V | 11 | 13-18-26 | 950 | 86.4 | 4100K | 80 | G24Q / GX24Q | 12 |
| LPL426A2550K | 11W NON DIMMABLE UNIVERSAL QUAD PL - 50K | 120-277V | 11 | 13-18-26 | 950 | 86.4 | 5000K | 80 | G24Q / GX24Q | 12 |

# LED Type A PL Lamps

## 15W PL 3U Lamp – Non-Dimmable • 25,000 Rated Life



| ITEM #       | DESCRIPTION                            | VOLTAGE  | WATTS | WATT EQUIV. | LUMENS | LPW | CCT   | CRI | BASE TYPE    | CASE QTY. |
|--------------|----------------------------------------|----------|-------|-------------|--------|-----|-------|-----|--------------|-----------|
| LPLU26A2527K | 15W NON DIMMABLE UNIVERSAL 3U PL - 27K | 120-277V | 15    | 18-26       | 1350   | 90  | 2700K | 80  | G24Q / GX24Q | 12        |
| LPLU26A2530K | 15W NON DIMMABLE UNIVERSAL 3U PL - 30K | 120-277V | 15    | 18-26       | 1350   | 90  | 3000K | 80  | G24Q / GX24Q | 12        |
| LPLU26A2535K | 15W NON DIMMABLE UNIVERSAL 3U PL - 35K | 120-277V | 15    | 18-26       | 1350   | 90  | 3500K | 80  | G24Q / GX24Q | 12        |
| LPLU26A2541K | 15W NON DIMMABLE UNIVERSAL 3U PL - 41K | 120-277V | 15    | 18-26       | 1350   | 90  | 4100K | 80  | G24Q / GX24Q | 12        |
| LPLU26A2550K | 15W NON DIMMABLE UNIVERSAL 3U PL - 50K | 120-277V | 15    | 18-26       | 1350   | 90  | 5000K | 80  | G24Q / GX24Q | 12        |

## 16W PL 3U Lamp – Non-Dimmable • 25,000 Rated Life



|              |                                        |          |    |       |      |      |       |    |              |    |
|--------------|----------------------------------------|----------|----|-------|------|------|-------|----|--------------|----|
| LPLU32A2527K | 16W NON DIMMABLE UNIVERSAL 3U PL - 27K | 120-277V | 16 | 32-42 | 1500 | 93.8 | 2700K | 80 | G24Q / GX24Q | 12 |
| LPLU32A2530K | 16W NON DIMMABLE UNIVERSAL 3U PL - 30K | 120-277V | 16 | 32-42 | 1500 | 93.8 | 3000K | 80 | G24Q / GX24Q | 12 |
| LPLU32A2535K | 16W NON DIMMABLE UNIVERSAL 3U PL - 35K | 120-277V | 16 | 32-42 | 1500 | 93.8 | 3500K | 80 | G24Q / GX24Q | 12 |
| LPLU32A2541K | 16W NON DIMMABLE UNIVERSAL 3U PL - 41K | 120-277V | 16 | 32-42 | 1500 | 93.8 | 4100K | 80 | G24Q / GX24Q | 12 |
| LPLU32A2550K | 16W NON DIMMABLE UNIVERSAL 3U PL - 50K | 120-277V | 16 | 32-42 | 1500 | 93.8 | 5000K | 80 | G24Q / GX24Q | 12 |

## 17W PLL Lamp – Non-Dimmable • 25,000 Rated Life



|               |                            |          |    |    |      |      |       |    |      |    |
|---------------|----------------------------|----------|----|----|------|------|-------|----|------|----|
| LPLLU40A5027K | 17W NON DIMMABLE PLL - 27K | 120-277V | 17 | 40 | 2000 | 90.5 | 2700K | 80 | 2G11 | 12 |
| LPLLU40A5030K | 17W NON DIMMABLE PLL - 30K | 120-277V | 17 | 40 | 2000 | 90.5 | 3000K | 80 | 2G11 | 12 |
| LPLLU40A5035K | 17W NON DIMMABLE PLL - 35K | 120-277V | 17 | 40 | 2000 | 90.5 | 3500K | 80 | 2G11 | 12 |
| LPLLU40A5041K | 17W NON DIMMABLE PLL - 41K | 120-277V | 17 | 40 | 2100 | 90.5 | 4100K | 80 | 2G11 | 12 |
| LPLLU40A5050K | 17W NON DIMMABLE PLL - 50K | 120-277V | 17 | 40 | 2150 | 90.5 | 5000K | 80 | 2G11 | 12 |

## 19W Rotating Horizontal Lamp – Dimmable • 50,000 Rated Life



|              |                                           |          |    |       |      |       |       |    |              |    |
|--------------|-------------------------------------------|----------|----|-------|------|-------|-------|----|--------------|----|
| LPLH42A5027K | 19W DIMMABLE ROTATING HORIZONTAL PL - 27K | 120-277V | 19 | 32-42 | 1900 | 100   | 2700K | 80 | G24Q / GX24Q | 12 |
| LPLH42A5030K | 19W DIMMABLE ROTATING HORIZONTAL PL - 30K | 120-277V | 19 | 32-42 | 2000 | 105.3 | 3000K | 80 | G24Q / GX24Q | 12 |
| LPLH42A5035K | 19W DIMMABLE ROTATING HORIZONTAL PL - 35K | 120-277V | 19 | 32-42 | 2000 | 105.3 | 3500K | 80 | G24Q / GX24Q | 12 |
| LPLH42A5041K | 19W DIMMABLE ROTATING HORIZONTAL PL - 41K | 120-277V | 19 | 32-42 | 2000 | 105.3 | 4100K | 80 | G24Q / GX24Q | 12 |
| LPLH42A5050K | 19W DIMMABLE ROTATING HORIZONTAL PL - 50K | 120-277V | 19 | 32-42 | 2000 | 105.3 | 5000K | 80 | G24Q / GX24Q | 12 |

# LED Type B PL Lamps

## 4.5W PL 1U Lamp – Non-Dimmable • Omni Directional • 25,000 Rated Life



| ITEM #       | DESCRIPTION       | VOLTAGE  | WATTS | WATT EQUIV. | LUMENS | LPW   | CCT   | CRI | BASE TYPE | CASE QTY. |
|--------------|-------------------|----------|-------|-------------|--------|-------|-------|-----|-----------|-----------|
| LPLU07B2527K | LED 4.5W 1U B 27K | 120-277V | 4.5   | 5/7         | 450    | 100.0 | 2700K | 80  | G23       | 12        |
| LPLU07B2530K | LED 4.5W 1U B 30K | 120-277V | 4.5   | 5/7         | 500    | 111.1 | 3000K | 80  | G23       | 12        |
| LPLU07B2535K | LED 4.5W 1U B 35K | 120-277V | 4.5   | 5/7         | 500    | 111.1 | 3500K | 80  | G23       | 12        |
| LPLU07B2541K | LED 4.5W 1U B 41K | 120-277V | 4.5   | 5/7         | 500    | 111.1 | 4100K | 80  | G23       | 12        |
| LPLU07B2550K | LED 4.5W 1U B 50K | 120-277V | 4.5   | 5/7         | 500    | 111.1 | 5000K | 80  | G23       | 12        |

## 5W PL 1U Lamp – Non-Dimmable • 25,000 Rated Life



| ITEM #       | DESCRIPTION     | VOLTAGE  | WATTS | WATT EQUIV. | LUMENS | LPW | CCT   | CRI | BASE TYPE | CASE QTY. |
|--------------|-----------------|----------|-------|-------------|--------|-----|-------|-----|-----------|-----------|
| LPLU09B2527K | LED 5W 1U B 27K | 120-277V | 5     | 5/7/9       | 500    | 100 | 2700K | 80  | GX23      | 12        |
| LPLU09B2530K | LED 5W 1U B 30K | 120-277V | 5     | 5/7/9       | 550    | 110 | 3000K | 80  | GX23      | 12        |
| LPLU09B2535K | LED 5W 1U B 35K | 120-277V | 5     | 5/7/9       | 550    | 110 | 3500K | 80  | GX23      | 12        |
| LPLU09B2541K | LED 5W 1U B 41K | 120-277V | 5     | 5/7/9       | 550    | 110 | 4100K | 80  | GX23      | 12        |
| LPLU09B2550K | LED 5W 1U B 50K | 120-277V | 5     | 5/7/9       | 550    | 110 | 5000K | 80  | GX23      | 12        |

## 7W PL 1U Lamp – Non-Dimmable • 25,000 Rated Life



| ITEM #       | DESCRIPTION     | VOLTAGE  | WATTS | WATT EQUIV. | LUMENS | LPW   | CCT   | CRI | BASE TYPE | CASE QTY. |
|--------------|-----------------|----------|-------|-------------|--------|-------|-------|-----|-----------|-----------|
| LPLU13B2527K | LED 7W 1U B 27K | 120-277V | 7     | 9-13        | 700    | 100   | 2700K | 80  | GX23      | 12        |
| LPLU13B2530K | LED 7W 1U B 30K | 120-277V | 7     | 9-13        | 750    | 107.1 | 3000K | 80  | GX23      | 12        |
| LPLU13B2535K | LED 7W 1U B 35K | 120-277V | 7     | 9-13        | 750    | 107.1 | 3500K | 80  | GX23      | 12        |
| LPLU13B2541K | LED 7W 1U B 41K | 120-277V | 7     | 9-13        | 750    | 107.1 | 4100K | 80  | GX23      | 12        |
| LPLU13B2550K | LED 7W 1U B 50K | 120-277V | 7     | 9-13        | 750    | 107.1 | 5000K | 80  | GX23      | 12        |

## 8W PL 2U Type B Lamp – Non-Dimmable • Omni Directional • 25,000 Rated Life



| ITEM #       | DESCRIPTION     | VOLTAGE  | WATTS | WATT EQUIV. | LUMENS | LPW   | CCT   | CRI | BASE TYPE | CASE QTY. |
|--------------|-----------------|----------|-------|-------------|--------|-------|-------|-----|-----------|-----------|
| LPL213B2527K | LED 8W 2U B 27K | 120-277V | 8     | 13          | 1000   | 125.0 | 2700K | 80  | GX23      | 12        |
| LPL213B2530K | LED 8W 2U B 30K | 120-277V | 8     | 13          | 1000   | 125.0 | 3000K | 80  | GX23      | 12        |
| LPL213B2535K | LED 8W 2U B 35K | 120-277V | 8     | 13          | 1000   | 125.0 | 3500K | 80  | GX23      | 12        |
| LPL213B2541K | LED 8W 2U B 41K | 120-277V | 8     | 13          | 1000   | 125.0 | 4100K | 80  | GX23      | 12        |
| LPL213B2550K | LED 8W 2U B 50K | 120-277V | 8     | 13          | 1000   | 125.0 | 5000K | 80  | GX23      | 12        |

# LED Type B PL Lamps

## 8W PL 2U Lamp – Non-Dimmable • 25,000 Rated Life



| ITEM #       | DESCRIPTION                           | VOLTAGE  | WATTS | WATT EQUIV. | LUMENS | LPW   | CCT   | CRI | BASE TYPE                    | CASE QTY. |
|--------------|---------------------------------------|----------|-------|-------------|--------|-------|-------|-----|------------------------------|-----------|
| LPL218B2527K | 8W NON DIMMABLE UNIVERSAL 2U PL - 27K | 120-277V | 8     | 13-18-26    | 975    | 121.9 | 2700K | 80  | G24D / GX24D<br>G24Q / GX24Q | 12        |
| LPL218B2530K | 8W NON DIMMABLE UNIVERSAL 2U PL - 30K | 120-277V | 8     | 13-18-26    | 1000   | 125   | 3000K | 80  | G24D / GX24D<br>G24Q / GX24Q | 12        |
| LPL218B2535K | 8W NON DIMMABLE UNIVERSAL 2U PL - 35K | 120-277V | 8     | 13-18-26    | 1025   | 128.1 | 3500K | 80  | G24D / GX24D<br>G24Q / GX24Q | 12        |
| LPL218B2541K | 8W NON DIMMABLE UNIVERSAL 2U PL - 41K | 120-277V | 8     | 13-18-26    | 1050   | 131.3 | 4100K | 80  | G24D / GX24D<br>G24Q / GX24Q | 12        |
| LPL218B2550K | 8W NON DIMMABLE UNIVERSAL 2U PL - 50K | 120-277V | 8     | 13-18-26    | 1050   | 131.3 | 5000K | 80  | G24D / GX24D<br>G24Q / GX24Q | 12        |

## 13W PL 3U Lamp – Non-Dimmable • 25,000 Rated Life



|              |                  |          |    |       |      |       |       |    |                              |    |
|--------------|------------------|----------|----|-------|------|-------|-------|----|------------------------------|----|
| LPLU42B2527K | LED 13W 3U B 27K | 120-277V | 13 | 32-42 | 1400 | 107.7 | 2700K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLU42B2530K | LED 13W 3U B 30K | 120-277V | 13 | 32-42 | 1500 | 115.4 | 3000K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLU42B2535K | LED 13W 3U B 35K | 120-277V | 13 | 32-42 | 1500 | 115.4 | 3500K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLU42B2541K | LED 13W 3U B 41K | 120-277V | 13 | 32-42 | 1600 | 123.1 | 4100K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLU42B2550K | LED 13W 3U B 50K | 120-277V | 13 | 32-42 | 1600 | 123.1 | 5000K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |

## 9W Horizontal PL Lamp – Non-Dimmable • 25,000 Rated Life



|              |                         |          |   |       |      |       |       |    |                              |    |
|--------------|-------------------------|----------|---|-------|------|-------|-------|----|------------------------------|----|
| LPLH26B5027K | LED 9W HORIZONTAL B 27K | 120-277V | 9 | 18-26 | 1100 | 122.2 | 2700K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLH26B5030K | LED 9W HORIZONTAL B 30K | 120-277V | 9 | 18-26 | 1100 | 122.2 | 3000K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLH26B5035K | LED 9W HORIZONTAL B 35K | 120-277V | 9 | 18-26 | 1100 | 122.2 | 3500K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLH26B5041K | LED 9W HORIZONTAL B 41K | 120-277V | 9 | 18-26 | 1100 | 122.2 | 4100K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLH26B5050K | LED 9W HORIZONTAL B 50K | 120-277V | 9 | 18-26 | 1100 | 122.2 | 5000K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |

## 9W Vertical PL Lamp – Non-Dimmable • 25,000 Rated Life



|              |                            |          |   |       |      |       |       |    |                              |    |
|--------------|----------------------------|----------|---|-------|------|-------|-------|----|------------------------------|----|
| LPLV26B5027K | LED 9W VERTICAL BR30 B 27K | 120-277V | 9 | 18-26 | 1100 | 122.2 | 2700K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLV26B5030K | LED 9W VERTICAL BR30 B 30K | 120-277V | 9 | 18-26 | 1100 | 122.2 | 3000K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLV26B5035K | LED 9W VERTICAL BR30 B 35K | 120-277V | 9 | 18-26 | 1100 | 122.2 | 3500K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLV26B5041K | LED 9W VERTICAL BR30 B 41K | 120-277V | 9 | 18-26 | 1100 | 122.2 | 4100K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |
| LPLV26B5050K | LED 9W VERTICAL BR30 B 50K | 120-277V | 9 | 18-26 | 1100 | 122.2 | 5000K | 80 | G24D / GX24D<br>G24Q / GX24Q | 12 |

# LED PL Lamps

## 17.5W PLL Type B Lamp – Non-Dimmable • 25,000 Rated Life



| ITEM #        | DESCRIPTION                      | VOLTAGE  | WATTS | WATT EQUIV. | LUMENS | LPW   | CCT   | CRI | BASE TYPE | CASE QTY. |
|---------------|----------------------------------|----------|-------|-------------|--------|-------|-------|-----|-----------|-----------|
| LPLLU40B5027K | 17.5W NON DIMMABLE PLL40 B - 27K | 120-277V | 17.5  | 40          | 2050   | 117.1 | 2700K | 80  | 2G11      | 12        |
| LPLLU40B5030K | 17.5W NON DIMMABLE PLL40 B - 30K | 120-277V | 17.5  | 40          | 2050   | 117.1 | 3000K | 80  | 2G11      | 12        |
| LPLLU40B5035K | 17.5W NON DIMMABLE PLL40 B - 35K | 120-277V | 17.5  | 40          | 2000   | 114.3 | 3500K | 80  | 2G11      | 12        |
| LPLLU40B5041K | 17.5W NON DIMMABLE PLL40 B - 41K | 120-277V | 17.5  | 40          | 2100   | 120   | 4100K | 80  | 2G11      | 12        |
| LPLLU40B5050K | 17.5W NON DIMMABLE PLL40 B - 50K | 120-277V | 17.5  | 40          | 2150   | 122.9 | 5000K | 80  | 2G11      | 12        |

## 21W Adjustable Shape PL Type AB Lamp – 50,000 Rated Life



| ITEM #        | DESCRIPTION                            | VOLTAGE | A=21<br>B=19 | 32-42 | A=1800<br>B=2100 | A=85.7<br>B=110.5 | 2700K | 80 | G24Q / GX24Q | 12 |
|---------------|----------------------------------------|---------|--------------|-------|------------------|-------------------|-------|----|--------------|----|
| LAPL42AB5027K | 21W DIMMABLE ADJUSTABLE SHAPE PL - 27K | 120V    | A=21<br>B=19 | 32-42 | A=1800<br>B=2100 | A=85.7<br>B=110.5 | 2700K | 80 | G24Q / GX24Q | 12 |
| LAPL42AB5030K | 21W DIMMABLE ADJUSTABLE SHAPE PL - 30K | 120V    | A=21<br>B=19 | 32-42 | A=1900<br>B=2200 | A=90.5<br>B=115.8 | 3000K | 80 | G24Q / GX24Q | 12 |
| LAPL42AB5035K | 21W DIMMABLE ADJUSTABLE SHAPE PL - 35K | 120V    | A=21<br>B=19 | 32-42 | A=1925<br>B=2200 | A=91.7<br>B=115.8 | 3500K | 80 | G24Q / GX24Q | 12 |
| LAPL42AB5041K | 21W DIMMABLE ADJUSTABLE SHAPE PL - 41K | 120V    | A=21<br>B=19 | 32-42 | A=1925<br>B=2200 | A=91.7<br>B=115.8 | 4100K | 80 | G24Q / GX24Q | 12 |
| LAPL42AB5050K | 21W DIMMABLE ADJUSTABLE SHAPE PL - 50K | 120V    | A=21<br>B=19 | 32-42 | A=1925<br>B=2200 | A=91.7<br>B=115.8 | 5000K | 80 | G24Q / GX24Q | 12 |

## 11W PL GU24 Base Lamp – Non-Dimmable • 25,000 Rated Life



| ITEM #        | DESCRIPTION                          | VOLTAGE | 11 | 75 | 1100 | 100   | 2700K | 80 | GU24 | 12 |
|---------------|--------------------------------------|---------|----|----|------|-------|-------|----|------|----|
| LPL75GUD2527K | 11W NON DIMMABLE GU24 BASED PL - 27K | 120V    | 11 | 75 | 1100 | 100   | 2700K | 80 | GU24 | 12 |
| LPL75GUD2530K | 11W NON DIMMABLE GU24 BASED PL - 30K | 120V    | 11 | 75 | 1150 | 104.5 | 3000K | 80 | GU24 | 12 |
| LPL75GUD2535K | 11W NON DIMMABLE GU24 BASED PL - 35K | 120V    | 11 | 75 | 1200 | 109.1 | 3500K | 80 | GU24 | 12 |
| LPL75GUD2541K | 11W NON DIMMABLE GU24 BASED PL - 41K | 120V    | 11 | 75 | 1200 | 109.1 | 4100K | 80 | GU24 | 12 |
| LPL75GUD2550K | 11W NON DIMMABLE GU24 BASED PL - 50K | 120V    | 11 | 75 | 1200 | 109.1 | 5000K | 80 | GU24 | 12 |

## 13W PL GU24 Base Lamp – Non-Dimmable • 25,000 Rated Life



| ITEM #         | DESCRIPTION                          | VOLTAGE | 13 | 100 | 1450 | 111.5 | 2700K | 80 | GU24 | 12 |
|----------------|--------------------------------------|---------|----|-----|------|-------|-------|----|------|----|
| LPL100GUD2527K | 13W NON DIMMABLE GU24 BASED PL - 27K | 120V    | 13 | 100 | 1450 | 111.5 | 2700K | 80 | GU24 | 12 |
| LPL100GUD2530K | 13W NON DIMMABLE GU24 BASED PL - 30K | 120V    | 13 | 100 | 1500 | 115.4 | 3000K | 80 | GU24 | 12 |
| LPL100GUD2535K | 13W NON DIMMABLE GU24 BASED PL - 35K | 120V    | 13 | 100 | 1500 | 115.4 | 3500K | 80 | GU24 | 12 |
| LPL100GUD2541K | 13W NON DIMMABLE GU24 BASED PL - 41K | 120V    | 13 | 100 | 1550 | 119.2 | 4100K | 80 | GU24 | 12 |
| LPL100GUD2550K | 13W NON DIMMABLE GU24 BASED PL - 50K | 120V    | 13 | 100 | 1600 | 123.1 | 5000K | 80 | GU24 | 12 |

# LED Accent Lamps

## 2.5W G9 Accent Light – Dimmable • Clear • 25,000 Rated Life



| ITEM #     | DESCRIPTION                      | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | CCT   | CRI | BASE | CASE QTY. |
|------------|----------------------------------|---------|-------|-------------|--------|-----|-------|-----|------|-----------|
| L2G9D2527K | LED DIMMABLE 2.5W CLEAR G9 - 27K | 120V    | 2.5   | 15          | 200    | 80  | 2700K | 90  | G9   | 20        |
| L2G9D2530K | LED DIMMABLE 2.5W CLEAR G9 - 30K | 120V    | 2.5   | 15          | 200    | 80  | 3000K | 90  | G9   | 20        |

## 3W G9 Accent Light – Dimmable • Clear • 25,000 Rated Life



|            |                                |      |   |    |     |    |       |    |    |    |
|------------|--------------------------------|------|---|----|-----|----|-------|----|----|----|
| L3G9D2527K | LED DIMMABLE 3W CLEAR G9 - 27K | 120V | 3 | 25 | 240 | 80 | 2700K | 90 | G9 | 20 |
| L3G9D2530K | LED DIMMABLE 3W CLEAR G9 - 30K | 120V | 3 | 25 | 240 | 80 | 3000K | 90 | G9 | 20 |

## 4W G9 Accent Light – Dimmable • Clear • 25,000 Rated Life



|            |                                |      |   |    |     |    |       |    |    |    |
|------------|--------------------------------|------|---|----|-----|----|-------|----|----|----|
| L4G9D2527K | LED DIMMABLE 4W CLEAR G9 - 27K | 120V | 4 | 30 | 360 | 80 | 2700K | 90 | G9 | 20 |
| L4G9D2530K | LED DIMMABLE 4W CLEAR G9 - 30K | 120V | 4 | 30 | 360 | 80 | 3000K | 90 | G9 | 20 |

## 5W G9 Accent Light – Dimmable • Clear • 25,000 Rated Life



|            |                                |      |   |    |     |    |       |    |    |    |
|------------|--------------------------------|------|---|----|-----|----|-------|----|----|----|
| L5G9D2527K | LED DIMMABLE 5W CLEAR G9 - 27K | 120V | 5 | 35 | 400 | 80 | 2700K | 90 | G9 | 20 |
| L5G9D2530K | LED DIMMABLE 5W CLEAR G9 - 30K | 120V | 5 | 35 | 400 | 80 | 3000K | 90 | G9 | 20 |

## 3W G9 Accent Light – Dimmable • Clear • 25,000 Rated Life



|              |                                 |      |   |    |     |    |       |    |     |    |
|--------------|---------------------------------|------|---|----|-----|----|-------|----|-----|----|
| L3E12D2527KF | LED DIMMABLE 3W FROST E12 - 27K | 120V | 3 | 25 | 270 | 90 | 2700K | 90 | E12 | 20 |
|--------------|---------------------------------|------|---|----|-----|----|-------|----|-----|----|

## 1.5W G4 Accent Light – Non-Dimmable • Clear • 25,000 Rated Life



|             |                                     |     |     |    |     |    |       |    |    |    |
|-------------|-------------------------------------|-----|-----|----|-----|----|-------|----|----|----|
| L1T3N1030K2 | NON DIMMABLE 1.5W G4 - 30K - 2 PACK | 12V | 1.5 | 10 | 120 | 80 | 3000K | 80 | G4 | 25 |
|-------------|-------------------------------------|-----|-----|----|-----|----|-------|----|----|----|

# LED Elevator Lamps

| ITEM # | DESCRIPTION | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW | CCT | CRI | BASE | CASE QTY. |
|--------|-------------|---------|-------|-------------|--------|-----|-----|-----|------|-----------|
|--------|-------------|---------|-------|-------------|--------|-----|-----|-----|------|-----------|

## 2W Elevator Lamp – Dimmable • 25,000 Rated Life



|             |                                       |     |   |    |     |    |       |    |       |    |
|-------------|---------------------------------------|-----|---|----|-----|----|-------|----|-------|----|
| LED2W1383V2 | LED 2W 1383 FROST ELEVATOR LAMP - 27K | 12V | 2 | 20 | 150 | 75 | 2700K | 80 | BA15S | 12 |
|-------------|---------------------------------------|-----|---|----|-----|----|-------|----|-------|----|



|            |                                      |     |   |    |     |    |       |    |       |    |
|------------|--------------------------------------|-----|---|----|-----|----|-------|----|-------|----|
| LED2WGBFV2 | LED 2W GBF FROST ELEVATOR LAMP - 27K | 12V | 2 | 20 | 150 | 75 | 2700K | 80 | BA15D | 12 |
|------------|--------------------------------------|-----|---|----|-----|----|-------|----|-------|----|

# Starlight Series Lamps

No matter the application — commercial, residential, retail or industrial — TCP’s Starlight LED Lamps give you a unique shape and sleek low profile, combined with a pop of unexpected color, and smooth, warm dimming. Our Starlight line-up comes in red, black, green, blue and white finishes, with matching pendant mounts available.

## In this section:

LED Starlight Series Lamps ..... **138**



# LED Starlight Series Lamps



Shine as bright as a star with our LED Starlight series. The sleek, modern shape can be used in a wide variety of applications — from pendants to sockets and everywhere in between.

## Features & Benefits

- Sleek, low profile design provides a unique shape for limitless applications
- Smooth warm dimming creates the perfect atmosphere
- 110° beam angle
- Up to 85% more efficient than incandescent/halogen replacements

## Specifications

Color Temperatures ..... 3000K, 4000K, 5000K  
 Input Line Voltage..... 120 VAC  
 Frequency ..... 50/60HZ  
 CRI..... 80  
 Base..... E26

| ITEM #                                                               | DESCRIPTION               | VOLTAGE | WATTS | WATT EQUIV. | LUMENS | LPW   | CCT   | CRI | BEAM ANGLE | CASE QTY. |
|----------------------------------------------------------------------|---------------------------|---------|-------|-------------|--------|-------|-------|-----|------------|-----------|
| <b>9W SL13 Starlight – Dimmable • E26 Base • 30,000 Rated Life</b>   |                           |         |       |             |        |       |       |     |            |           |
| L9SL13D3030K                                                         | LED 9W DIMMABLE - 30K     | 120V    | 9     | 65          | 950    | 105.6 | 3000K | 80  | 110°       | 12        |
| L9SL13D3040K                                                         | LED 9W DIMMABLE - 40K     | 120V    | 9     | 65          | 1000   | 111.1 | 4000K | 80  | 110°       | 12        |
| L9SL13D3050K                                                         | LED 9W DIMMABLE - 50K     | 120V    | 9     | 65          | 1000   | 111.1 | 5000K | 80  | 110°       | 12        |
| <b>15W SL15 Starlight – Dimmable • E26 Base • 30,000 Rated Life</b>  |                           |         |       |             |        |       |       |     |            |           |
| L15SL16D3030K                                                        | LED 15W DIMMABLE - 30K    | 120V    | 15    | 100         | 1625   | 108.3 | 3000K | 80  | 110°       | 12        |
| L15SL16D3040K                                                        | LED 15W DIMMABLE - 40K    | 120V    | 15    | 100         | 1700   | 113.3 | 4000K | 80  | 110°       | 12        |
| L15SL16D3050K                                                        | LED 15W DIMMABLE - 50K    | 120V    | 15    | 100         | 1750   | 116.7 | 5000K | 80  | 110°       | 12        |
| <b>19W SL19 Starlight – Dimmable • E26 Base • 30,000 Rated Life</b>  |                           |         |       |             |        |       |       |     |            |           |
| L19SL19D3030K                                                        | LED 19W DIMMABLE - 30K    | 120V    | 19    | 140         | 2100   | 110.5 | 3000K | 80  | 110°       | 12        |
| L19SL19D3040K                                                        | LED 19W DIMMABLE - 40K    | 120V    | 19    | 140         | 2250   | 118.4 | 4000K | 80  | 110°       | 12        |
| L19SL19D3050K                                                        | LED 19W DIMMABLE - 50K    | 120V    | 19    | 140         | 2250   | 118.4 | 5000K | 80  | 110°       | 12        |
| <b>22W SL22 Starlight – Dimmable • E26 Base • 30,000 Rated Life</b>  |                           |         |       |             |        |       |       |     |            |           |
| L22SL22D3030K                                                        | LED 22W DIMMABLE - 30K    | 120V    | 22    | 160         | 2350   | 106.8 | 3000K | 80  | 110°       | 12        |
| L22SL22D3040K                                                        | LED 22W DIMMABLE - 40K    | 120V    | 22    | 160         | 2450   | 111.4 | 4000K | 80  | 110°       | 12        |
| L22SL22D3050K                                                        | LED 22W DIMMABLE - 50K    | 120V    | 22    | 160         | 2450   | 111.4 | 5000K | 80  | 110°       | 12        |
| <b>25W SL122 Starlight – Dimmable • E26 Base • 30,000 Rated Life</b> |                           |         |       |             |        |       |       |     |            |           |
| L25SL22HD3030K                                                       | LED 25W DIMMABLE - 30K HL | 120V    | 25    | 200         | 3100   | 124   | 3000K | 80  | 110°       | 12        |
| L25SL22HD3040K                                                       | LED 25W DIMMABLE - 40K HL | 120V    | 25    | 200         | 3100   | 124   | 4000K | 80  | 110°       | 12        |

All models are available in Black, Red, Green, and Blue. Just add the following to the end of the part number:

- Add "B" for Black
- Add "RED" for Red
- Add "GRN" for Green
- Add "BLU" for Blue

These colors are available by special order only and require extra lead time.

### Available Accessories:

**Pendant Mounts** – 6' adjustable length mounts directly to junction box

- 555PMWHT – Pendant Mount White
- 555PMB – Pendant Mount Black
- 555PMRED – Pendant Mount Red
- 555PMGRN – Pendant Mount Green
- 555PMBLU – Pendant Mount Blue



**Extender** – Allows Starlight to be installed in standard sockets

**SLEXTEND** – Starlight Extender (perfect for installation in recessed cans)



# Exit and Emergency

TCP is your source for all of your exit and emergency needs with our selection of exit signs, combos, emergency lighting, and wire guards.



## In this section:

|                                            |            |
|--------------------------------------------|------------|
| LED Combo Emergency Exit Signs.....        | <b>140</b> |
| LED Exit Signs.....                        | <b>141</b> |
| LED Die-Cast Aluminum Exit Sign.....       | <b>142</b> |
| LED Low Profile Emergency Lights.....      | <b>143</b> |
| LED Adjustable Optics Emergency Light..... | <b>144</b> |
| LED Emergency Remote Heads.....            | <b>145</b> |
| Emergency Light Accessories.....           | <b>146</b> |

# Combo Emergency Exit Signs


Combining ultra-bright emergency wayfinding lights and exit door signage, TCP's Combo Emergency Exit Signs improve safety without compromising space. They feature red or green lettering options, flame-retardant housing and a powerful battery backup system that keeps the exit sign illuminated for at least 90 minutes.



## Features & Benefits

- Long-lasting, ultra-bright white LED lamp heads and red or green LED lettering
- Unique bi-color LED indicator light alerts on battery condition (Green = normal, Red = check battery)
- EZ-snap mounting canopy included – allows top or end mount
- Battery backup features 3.6V long-life, rechargeable NiCd battery
- Easily accessible test switch and charge rate indicator
- UL listed for damp locations
- Transfer switch automatically connects to internal battery for minimum 90-minute emergency illumination

## Catalog Ordering Matrix

|                                                                                    | Item #   | Description                                                                          | Light Color | Housing Color | Power                 |
|------------------------------------------------------------------------------------|----------|--------------------------------------------------------------------------------------|-------------|---------------|-----------------------|
|  | LED20723 | Universal Combo Emergency Exit Sign White Housing – Red Lettering                    | Red         | White         | AC and Battery Backup |
|                                                                                    | LED20784 | Universal Combo Emergency Exit Sign White Housing – Red Lettering – Remote Capable   | Red         | White         | AC and Battery Backup |
|                                                                                    | LED20785 | Universal Combo Emergency Exit Sign White Housing – Green Lettering – Remote Capable | Green       | White         | AC and Battery Backup |
|  | LED20786 | LED Low Profile Combo Emergency Exit Sign – Red Lettering                            | Red         | White         | AC and Battery Backup |
|                                                                                    | LED20785 | LED Low Profile Combo Emergency Exit Sign – Green Lettering                          | Green       | White         | AC and Battery Backup |

# LED Exit Signs



Take building safety to the next level with the versatile LED Exit Signs from TCP. Made of durable thermoplastic ABS, this double-sided exit sign is available in red or green and can be mounted from ceilings or walls. Select models feature a powerful battery backup system that keeps the exit sign illuminated for at least 90 minutes after power is lost.

## Features & Benefits

- Long-lasting, ultra-bright red or green LEDs and easily visible 6" lettering
- Easily accessible test switch and charge rate indicator
- Double-sided for top, end, or side mounting
- Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and to meet safety codes
- In battery backup models, transfer switch automatically connects to internal battery for minimum 90-minute emergency illumination
- Battery backup models feature 4.8V long-life, rechargeable NiCd battery
- ETL listed for damp locations

## Catalog Ordering Matrix

| Item # | Description                                    | Light Color | Housing Color | Power                 |
|--------|------------------------------------------------|-------------|---------------|-----------------------|
| 22742  | Red LED Exit Sign Universal AC Only            | Red         | White         | AC Only               |
| 22743  | Red LED Exit Sign Universal w/Battery Backup   | Red         | White         | AC and Battery Backup |
| 22744  | Green LED Exit Sign Universal AC Only          | Green       | White         | AC Only               |
| 22745  | Green LED Exit Sign Universal w/Battery Backup | Green       | White         | AC and Battery Backup |

# LED Die-Cast Aluminum Exit Sign

Clearly mark exit doors and improve building safety with the LED Die-Cast Aluminum Exit Sign from TCP. Featuring an attractive brushed aluminum finish and vivid red lettering, this double-sided exit sign can be mounted from ceilings or walls. A powerful battery backup system keeps the exit sign illuminated for at least 90 minutes after power is lost.




## Features & Benefits

- Long-lasting, ultra-bright red LEDs and easily visible lettering
- Aluminum mounting canopy included for ceiling (top) or wall (end) mount
- 4.8V long-life, maintenance-free, rechargeable NiCd battery
- UL listed for damp locations
- Internal solid-state transfer switch automatically connects internal battery to LED board for minimum 90-minute emergency illumination
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

## Catalog Ordering Matrix

| Item # | Description                                   | Light Color | Housing Color | Power                 |
|--------|-----------------------------------------------|-------------|---------------|-----------------------|
| 26D93  | LED Die-Cast Aluminum Exit Sign Red Lettering | Red         | Silver        | AC and Battery Backup |

# LED Low Profile Emergency Lights

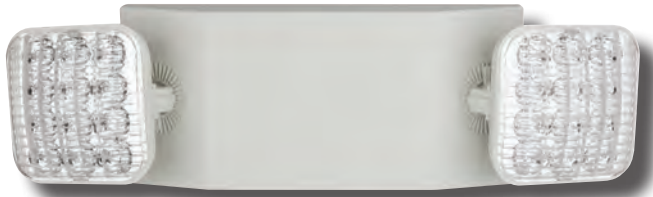

Increase building safety and improve wayfinding with TCP's LED Low Profile Emergency Lights. The long-life, ultra-bright lamp heads and rechargeable NiCd battery make this light the perfect low-maintenance solution for indoor and covered outdoor spaces. In the event of a power outage, the internal transfer switch automatically connects the battery to the lamp heads for a minimum 90-minute emergency illumination.

## Features & Benefits

- Ultra-bright white LED lamp heads
- Adjustable heads for optimal center-to-center spacing
- High performance, chrome-plated reflector
- Optional Self Diagnostic Feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- Suitable for wall or ceiling mount
- Long-life, rechargeable NiCd battery
- Damp location rated

## Catalog Ordering Matrix

| Item #      | Description                                               | Housing Color | Power                 | Features                         |
|-------------|-----------------------------------------------------------|---------------|-----------------------|----------------------------------|
| LEDWEL      | LED Emergency Light                                       | White         | AC and Battery Backup | -                                |
| LEDWELRC    | LED Emergency Light, Remote Capable                       | White         | AC and Battery Backup | Remote Capable                   |
| LEDWELSDT   | LED Emergency Light, Self Diagnostic Test                 | White         | AC and Battery Backup | Self Diagnostic                  |
| LEDWELRCSDT | LED Emergency Light, Remote Capable, Self Diagnostic Test | White         | AC and Battery Backup | Remote Capable & Self Diagnostic |

# LED Adjustable Optics Emergency Light

Increase building safety and improve wayfinding with TCP's LED Adjustable Optics Emergency Light. The long-life, ultra-bright lamp heads and rechargeable NiCd battery make this light the perfect low-maintenance solution for indoor and covered outdoor spaces.



## Features & Benefits

- Long life, efficient, ultra-bright white LED lamp heads
- Universal knockout pattern on backplate for surface mount and conduit connections
- 3.6V long-life, maintenance-free, rechargeable NiCd battery
- UL listed for damp locations
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Two adjustable LED lamp heads provide optimal center-to-center spacing

## Catalog Ordering Matrix

| Item #    | Description                           | Housing Color | Dimensions                     | Power                 |
|-----------|---------------------------------------|---------------|--------------------------------|-----------------------|
| LED21760A | LED Adjustable Optics Emergency Light | White         | 9 1/2" L x 2 1/4" W x 4 5/8" H | AC and Battery Backup |

# LED Emergency Remote Heads



Add illumination to existing exit signs and emergency lights with the LED Emergency Remote Heads from TCP. Available in single- and double-head versions, the lights can be mounted on the wall or ceiling to provide a simple, cost-effective solution for enhancing building safety.

## Features & Benefits

- Long-lasting, ultra-bright white LED lamp heads
- Adjustable heads for optimal center-to-center spacing
- High performance, chrome-plated, metalized reflector, and plastic lens for optimal light distribution
- Suitable for wall or ceiling mount
- Universal mounting plate included for mounting to single-gauge switch box
- UL listed for damp locations
- Available in white or black<sup>1</sup>

## Catalog Ordering Matrix

| Item #  | Description                                       | Voltage                                            | Style       | Housing Color      |
|---------|---------------------------------------------------|----------------------------------------------------|-------------|--------------------|
| LEDRH1  | LED Thermoplastic Remote Head – White Single Head | For Use with 3.6V, 6V, 9.6V, & 12V DC Power Source | Single Head | White              |
| LEDRH1B | LED Thermoplastic Remote Head – Black Single Head | For Use with 3.6V, 6V, 9.6V, & 12V DC Power Source | Single Head | Black <sup>1</sup> |
| LEDRH2  | LED Thermoplastic Remote Head – White Double Head | For Use with 3.6V, 6V, 9.6V, & 12V DC Power Source | Double Head | White              |
| LEDRH2B | LED Thermoplastic Remote Head – Black Double Head | For Use with 3.6V, 6V, 9.6V, & 12V DC Power Source | Double Head | Black <sup>1</sup> |

<sup>1</sup> Black is a special order item only with a 2-3 week lead time.

# Emergency Light Accessories

TCP offers durable 9-gauge steel wire guards for our Exit Signs and Emergency lights. All wire guards are easy to install and come standard in a painted white finish.



## Catalog Ordering Matrix



| Item #     | Description                              | Use With                                                             | Dimensions         |
|------------|------------------------------------------|----------------------------------------------------------------------|--------------------|
| STANDARDWG | Wire Guard for Exit and Emergency Lights | 22742, 22743, 22744, 22745, LEDWEL, LEDWELRC, LEDWELSDT, LEDWELRCSDT | 13¾" x 15¼" x 6"   |
| COMBOWG    | Combo Wire Guard                         | LED20783, LED20784, LED20785                                         | 13¾" x 305/8" x 6" |

# The TCP Mission

TCP was founded in 1993 in Aurora, Ohio, on the idea that the quality of light equals the quality of life. TCP is focused on driving new ideas for commercial, industrial and residential lighting to bring quality lighting to every environment.

TCP controls every aspect from design and development through manufacturing and distribution to fulfill our mission.





# Technology Cast in a Beautiful Light

For more information on the quality and care that TCP® can deliver, call us at 800.324.1496 or visit [tcsi.com](http://tcsi.com)

325 Campus Drive | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516

@2024 TCP WF529197